



Lithium Cylindrical Cell - CR 2


- Low self-discharge
- Long shelf life
- UN 38.3 tested
- Wide assortment of mounting options and wire terminals available

SPECIFICATIONS

| | |
|--------------------------|---------------------|
| Jauch part number | 245718 |
| Nominal Voltage | 3V |
| Nominal Capacity | 850 mAh |
| Cut-Off Voltage | 2V |
| Continuous Standard Load | 10 mA |
| Max. Continuous Current | 800 mA |
| Max. Pulse Current | 1500 mA |
| Operating Temperature | -40°C to +70°C * |
| Weight | Approx. 11.0 g |
| Chemistry | Li/MnO ₂ |
| UL1642 | MH62838 |


Note: Capacity 850mAh is obtained at standard cc load to 2.0V at 23°C.

DIMENSIONS [mm]

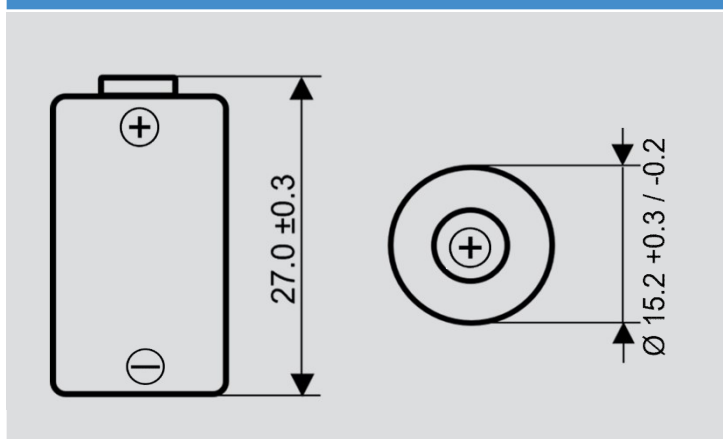


* In applications where the battery is exposed to temperatures >60°C, please contact Jauch.


DISCHARGE CHARACTERISTICS

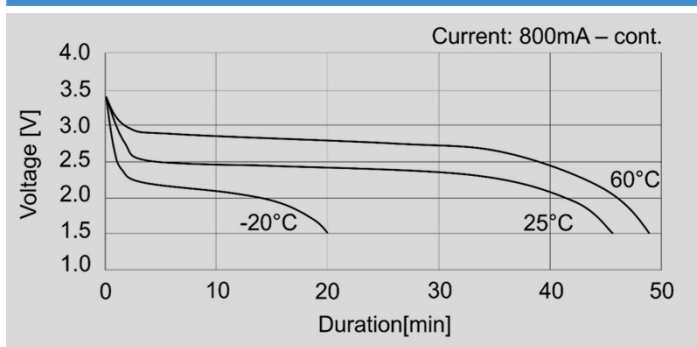

TEMPERATURE CHARACTERISTICS

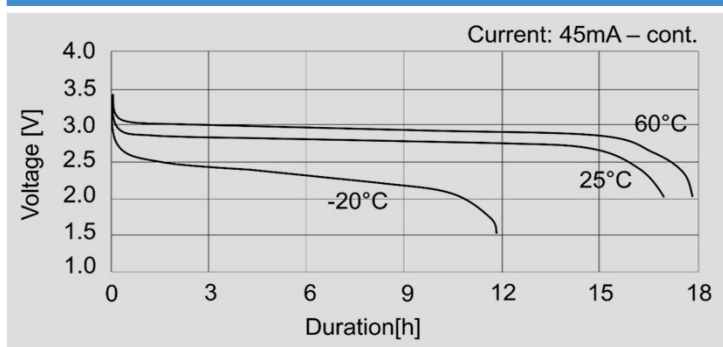

PULSE DISCHARGE CHARACTERISTICS

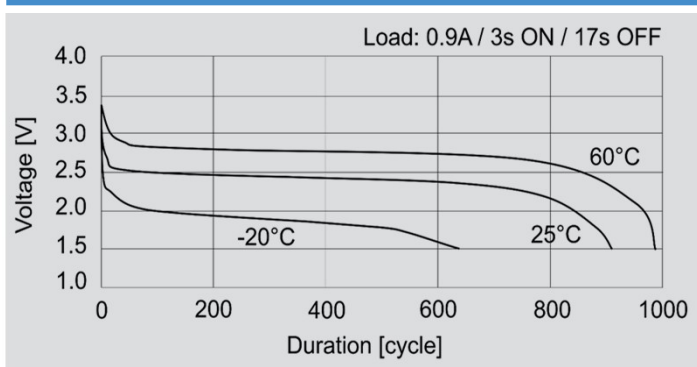

STORAGE CHARACTERISTICS

