



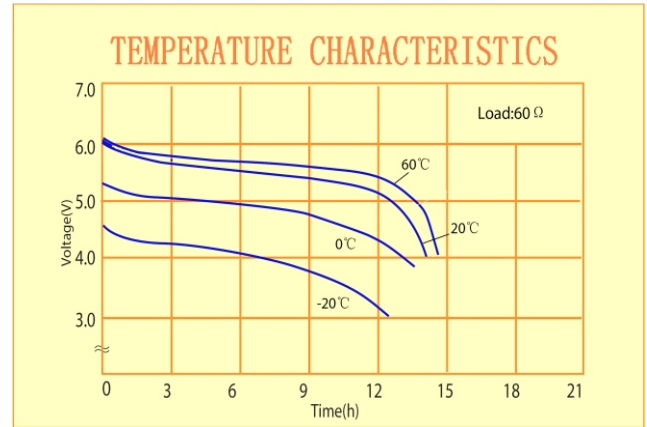


# CR-P2

Lithium Manganese Dioxide(Li-MnO<sub>2</sub>)Batteries

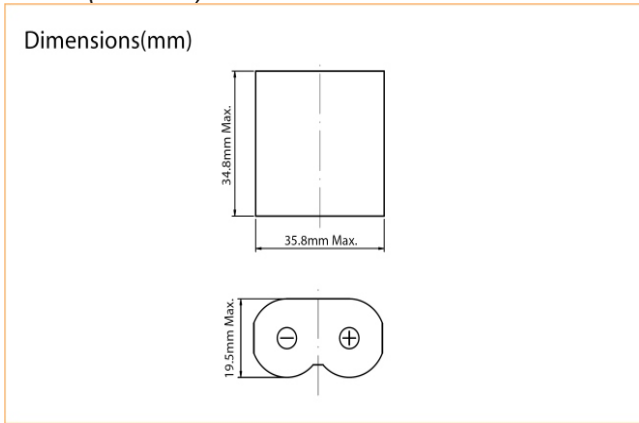


Nominal capacity (10mA, 4.0V off)	1500mAh
Nominal voltage	6.0V
Max. constant current	1500mA
Max. pulse current	3000mA
Operating temperature	-40~+85°C
Weight	42.0g

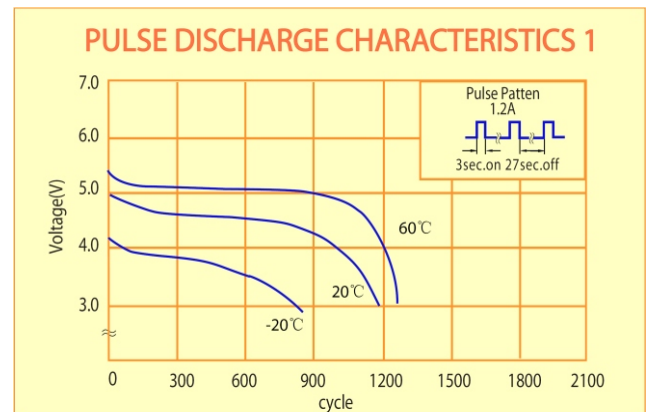

## WARNING

- Do not short-circuit between "+" and "-" terminals.
- Do not charge, damage the battery or throw it into fire.
- Do not solder directly on the battery. Please use wire or nickel sheet by spot welding.
- Take out the battery when discharged to cut-off voltage, and dispose of according to the national and local laws.

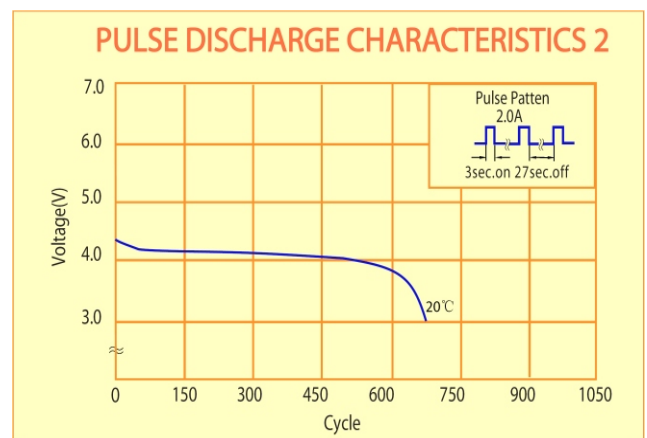

EVE ENERGY CO., LTD.

Address.:EVE Industrial Park, XiKeng Industrial zone, Huihuan Town, Huizhou, Guangdong, China

Operator: (86-752)260 6966 Direct:(86-752)260 5822

Fax: (86-752)260 6033 P.C.516006

<http://www.evebattery.com> Email: [sales@evebattery.com](mailto:sales@evebattery.com)

Latest version can be downloaded from the EVE web site