

HAL[®] 3930

Stray-Field Robust 3D Position Sensor
with Digital Output Interfaces

3D | HAL[®]
Technology

master | HAL[®]
Technology

Copyright, Warranty, and Limitation of Liability

The information and data contained in this document are believed to be accurate and reliable. The software and proprietary information contained therein may be protected by copyright, patent, trademark and/or other intellectual property rights of TDK-Micronas. All rights not expressly granted remain reserved by TDK-Micronas.

TDK-Micronas assumes no liability for errors and gives no warranty representation or guarantee regarding the suitability of its products for any particular purpose due to these specifications.

By this publication, TDK-Micronas does not assume responsibility for patent infringements or other rights of third parties which may result from its use. Commercial conditions, product availability and delivery are exclusively subject to the respective order confirmation.

Any information and data which may be provided in the document can and do vary in different applications, and actual performance may vary over time.

All operating parameters must be validated for each customer application by customers' technical experts. Any mention of target applications for our products is made without a claim for fit for purpose as this has to be checked at system level.

Any new issue of this document invalidates previous issues. TDK-Micronas reserves the right to review this document and to make changes to the document's content at any time without obligation to notify any person or entity of such revision or changes. For further advice please contact us directly.

Do not use our products in life-supporting systems, military, aviation, or aerospace applications! Unless explicitly agreed to otherwise in writing between the parties, TDK-Micronas' products are not designed, intended or authorized for use as components in systems intended for surgical implants into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the product could create a situation where personal injury or death could occur.

No part of this publication may be reproduced, photocopied, stored on a retrieval system or transmitted without the express written consent of TDK-Micronas.

TDK-Micronas Trademarks

- HAL
- 3D HAL
- masterHAL

Third-Party Trademarks

All other brand and product names or company names may be trademarks of their respective companies.

License Note

HAL 3930 uses licenses of Fraunhofer Institute for Integrated Circuits IIS.

Contents

| Page | Section | Title |
|-------------|----------------|--|
| 5 | 1. | Introduction |
| 6 | 1.1. | Major Applications |
| 7 | 1.2. | Features |
| 8 | 2. | Ordering Information |
| 8 | 2.1. | Device-Specific Ordering Codes |
| 10 | 3. | Functional Description |
| 10 | 3.1. | General Function |
| 12 | 3.2. | Signal Path |
| 13 | 3.3. | Register Definition |
| 13 | 3.3.1. | RAM Registers |
| 16 | 3.3.2. | EEPROM Registers |
| 33 | 3.4. | SENT Output Protocol |
| 36 | 3.4.1. | H.1 Format: 6 Data Nibble Frame with Two Fast Channels |
| 38 | 3.4.2. | H.2 Format: 3 Data Nibble Frame with One Fast Channel |
| 38 | 3.4.3. | H.4 Format: Secure Single Sensors with 12-bit Fast Channel |
| 40 | 3.4.4. | Error Diagnostic Reporting on Fast Channel and Status Bits |
| 41 | 3.4.5. | Pause Pulse |
| 42 | 3.4.6. | CRC Implementation |
| 42 | 3.4.7. | Slow Channel: Enhanced Serial Message |
| 42 | 3.4.8. | Slow Channel: Serial Message Sequence |
| 44 | 3.4.9. | Slow Channel: Serial Message Error Codes |
| 44 | 3.4.10. | Start-Up Behavior |
| 44 | 3.4.11. | Message Time for SENT Frames in PPC Mode |
| 45 | 4. | Functional Safety |
| 45 | 4.1. | Functional Safety Manual and Functional Safety Report |
| 45 | 4.2. | Integrated Diagnostic Mechanism |
| 47 | 5. | Specifications |
| 47 | 5.1. | Outline Dimensions |
| 49 | 5.2. | Soldering, Welding, Assembly |
| 49 | 5.3. | Storage and Shelf Life Package |
| 49 | 5.4. | Size and Position of Sensitive Areas |
| 50 | 5.5. | Definition of Magnetic-Field Vectors |
| 50 | 5.6. | Pin Connections and Short Description |
| 52 | 5.7. | Absolute Maximum Ratings |
| 54 | 5.8. | Recommended Operating Conditions |
| 55 | 5.9. | Characteristics |
| 62 | 5.10. | Magnetic Characteristics |
| 65 | 5.11. | Temperature Sensor |

Contents, continued

| Page | Section | Title |
|-------------|----------------|------------------------------------|
| 66 | 6. | Application Notes |
| 66 | 6.1. | Ambient Temperature |
| 66 | 6.2. | EMC and ESD |
| 67 | 6.3. | Application Circuit for HAL 3930 |
| 67 | 6.4. | Recommended Pad Size SOIC8 Package |
| 68 | 7. | Programming of the Sensor |
| 68 | 7.1. | Programming Interface |
| 69 | 7.2. | Programming Environment and Tools |
| 69 | 7.3. | Programming Information |
| 70 | 8. | Document History |

Stray-Field Robust 3D Position Sensor with Digital Output Interfaces

Release Note: Revision bars indicate significant changes to the previous edition.

1. Introduction

HAL 3930 is part of a new generation of TDK-Micronas' 3D position sensors addressing the need for stray-field robust 2D position sensors (linear and angular) as well as the ISO 26262 compliant development. It is a high-resolution position sensor for highly accurate position measurements.

HAL 3930 features a PWM or SENT output. The digital output format is customer configurable. In SENT mode, the sensor transmits SENT messages with and without pause pulse according to SAE J2716 rev. 4. Many parameters like tick time, frame format, etc. are configurable by the customer. The PWM output is configurable with frequencies between 0.1 kHz and 2 kHz.

Additionally, HAL 3930 offers a switch output (configurable high-/low-side switch). The switch signal is derived from the calculated position information or from various other sources along the device's signal path (e.g. temperature, magnetic-field amplitude, etc.). It is possible to define on/off switching points, switch logic, and switch polarity.

The device can measure 360° angular range, linear movements, as well as 3D position information of a magnet. 3D position means two angles calculated out of $B_x/B_y/B_z$. The 3D position information can be transmitted via the SENT interface. The device also features a so-called modulo function mainly used for chassis position sensor applications. With this mode it is possible to split the 360° measurement range into sub-segments (90°, 120° and 180°).

The device measures, based on Hall technology, vertical and horizontal magnetic-field components. It is able to suppress external magnetic stray-fields by using an array of Hall plates. Only a simple two-pole magnet is required to measure a rotation angle. Ideally, the magnet should be placed above the sensitive area in an end-of-shaft configuration. Stray-field robust off-axis measurements are supported as well.

On-chip signal processing calculates up to two angles out of the magnetic-field components and converts this value into a digital output signal.

Major characteristics like gain and offset, reference position, etc. can be adjusted to the magnetic circuitry by programming the non-volatile memory.

This product is defined as SEooC (Safety Element out of Context) ASIL B ready according to ISO 26262.

The device is designed for automotive and industrial applications. It operates in the ambient temperature range from -40 °C to 150 °C.

The sensor is available in the eight-pin SOIC8 SMD package.

1.1. Major Applications

Thanks to the sensor's versatile programming characteristics and its high accuracy, the HAL 3930 is a potential solution for the following application examples:

- Chassis position
- Turbo-charger
- Valve position, e.g. throttle
- EGR
- Shift position
- Steering angle
- Liquid-level measurements
- Non-contact potentiometer
- Clutch position
- Transmission position detection
- Brake pedal position / brake stroke sensor

1.2. Features

- Accurate angular measurement up to 360° and linear position detection
- 3D position detection supporting transmission of two angles out of B_X , B_Y , B_Z
- Compensation of magnetic stray-fields (rotary or linear position detection)
- SEooC ASIL B ready according to ISO 26262 to support Functional Safety applications
- Wide supply voltage range of 3 V up to 18 V
- Customer-configurable PWM or SENT output (push-pull output & open-drain output)
- Configurable output slew rates to reduce EMC emission
- 0.1 kHz to 2 kHz PWM
- SENT according to SAEJ2716 rev. 4 (APR2016) supporting three different frame formats:
 - H1. format: Two 12-bit fast channels (3 data nibbles position information and 3 data nibbles second position information or 12-bit temperature or magnetic-field amplitude) (supporting A.1 Dual Throttle Position Sensors)
 - H.2 Format: One 12-bit fast channel (3-nibble position information)
 - H.4 Format: Secure single sensors with 12-bit fast channel (3 nibble position information) and 12-bit secure sensor information
 - Enhanced 12-bit serial message format including temperature information
 - Programmable tick times between 0.5 μ s and 12 μ s
 - Low time of 3, 5, and 6 ticks
 - Configurable pause pulse (PPC, NPP)
 - Transmission of OEM ID's via slow channel
- Additional switch output
- Customer-configurable switching levels
- Up to 8 kSps sampling frequency
- Operates from -40 °C up to 170 °C junction temperature (Max. Ambient Temperature: $T_{A,absmax} = 160$ °C)
- Programming via the sensor's output pin. No additional programming pin required
- Various configurable signal processing parameter, like output gain and offset, reference position, temperature dependent offset, etc.
- Modulo function (90°/120°/180°) for chassis position applications
- Programmable arbitrary output characteristic with 17 variable or 33 fixed setpoints
- Programmable characteristics in a non-volatile memory (EEPROM) with redundancy and lock function
- Read access on non-volatile memory after customer lock
- On-board diagnostics of different functional blocks of the sensor

2. Ordering Information

A TDK-Micronas device is available in a variety of delivery forms. They are distinguished by a specific ordering code:

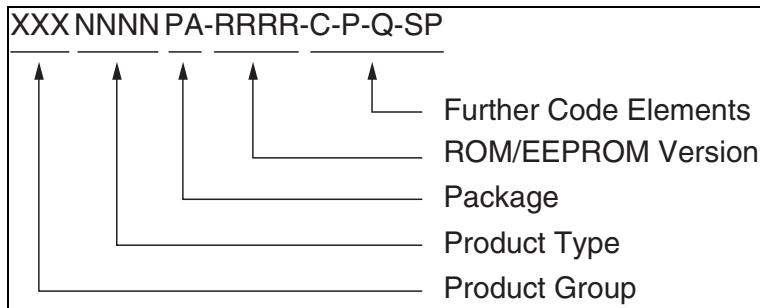


Fig. 2–1: Ordering code principle

For a detailed information, please refer to the brochure: “Sensors and Controllers: Ordering Codes, Packaging, Handling”.

2.1. Device-Specific Ordering Codes

The HAL 3930 is available in the following package.

Table 2–1: Available packages



| Package Code (PA) | Package Type |
|-------------------|--------------|
| DJ | SOIC8 |

For available variants for Configuration (C), Packaging (P), Quantity (Q), and Special Procedure (SP) please contact TDK-Micronas.

Table 2–2: Ordering Information

| Product | Package | ROM/EEPROM Version | Further Code [-C-P-Q-SP] | Comments |
|----------|------------|--------------------|---------------------------------------|---|
| HAL 3930 | DJ = SOIC8 | 0000 | See TDK-Micronas Ordering Information | |
| HAL 3930 | DJ = SOIC8 | 2300 | See TDK-Micronas Ordering Information | Additional registers and functions compared to ROM version 0000. Differences described in the following chapters. |

Table 2–3: Available ordering codes and corresponding package marking

| Ordering Code | Package Marking | Description |
|---------------------------|---|---|
| HAL3930DJ-0000[-C-P-Q-SP] |  | <p>Line 1: Product Type / ROM-ID Line 2: Lot number Line 3: Date code / Special Procedure SB (optional)</p> |
| HAL3930DJ-2300[-C-P-Q-SP] |  | |

3. Functional Description

3.1. General Function

HAL 3930 is a 3D position sensor based on Hall-effect technology. The sensor includes an array of horizontal and vertical Hall-plates based on TDK-Micronas' 3D HAL[®] technology. The array of Hall plates has a diameter C of 2.25 mm (nominal).

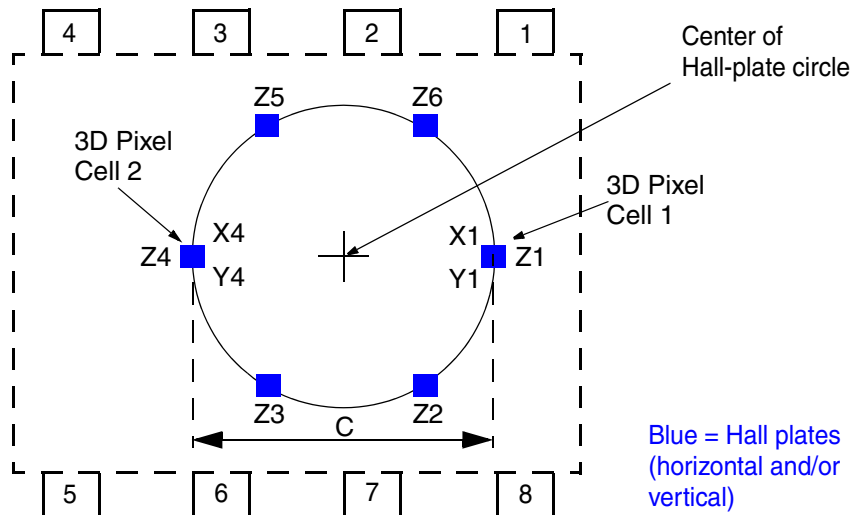


Fig. 3–1: Hall-plate position definition for HAL 3930

The Hall-plate signals are first measured by up to three A/D converters, filtered and temperature compensated. A linearization block can be used optionally to reduce the overall system angular non-linearity error, due to mechanical misalignment, magnet imperfections, etc.

On-chip offset compensation by spinning current minimizes the errors due to supply voltage and temperature variations as well as external package stress.

Stray-field compensation is done device inherent.

Depending on the measurement configuration different combination of Hall plates will be used for the magnetic-field sensing.

The sensor supports various measurement configurations:

- Angular measurements in a range between 0° and 360° with stray-field compensation
- Linear position detection with stray-field compensation based on the differential signals of the two 3D Pixel Cells
- 2D linear and angular position detection without stray-field compensation (B_Y/B_X , B_Z/B_X , B_Z/B_Y) with 3D Pixel Cell 1
- 3D position detection (calculation of two angles) without stray-field compensation

The 360° angular range can be split in 90°/120°/180° sub-segments.

Additionally, the device features a switch output. The source for the switch signal can be derived from various internal sensor signals along the signal path. The available sources can be found in Table 3–1 on page 27. It is possible to define ON and OFF switching levels, the start-up behavior, and the output polarity. The switch output can be configured as high-side or low-side switch.

Overall, the in-system calibration can be utilized by the system designer to optimize performance for a specific system. The calibration information is stored in an on-chip non-volatile memory.

The calculated position information is either transmitted via PWM signals or SENT frames.

The HAL 3930 is programmable by modulation of the output voltage. No additional programming pin is needed and fast end-of-line programming is enabled.

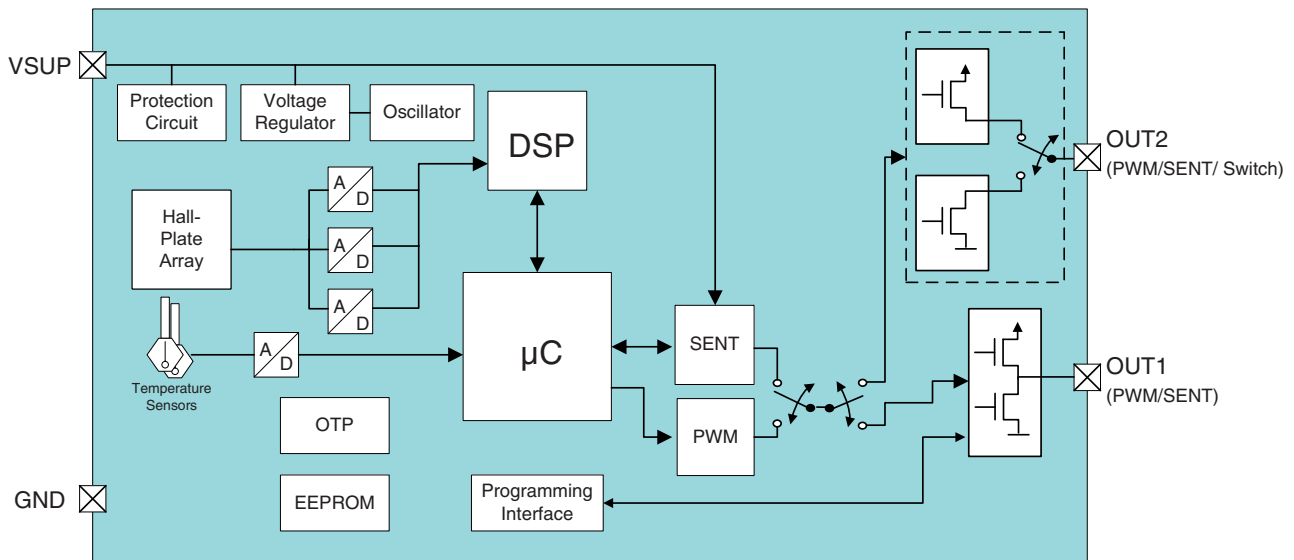


Fig. 3–2: HAL 3930 block diagram

3.2. Signal Path

The DSP part of this sensor performs the signal conditioning. The parameters for the DSP are stored in the non-volatile memory. Details of the overall signal path are shown in Fig. 3–3. Not all functions are available for all measurement modes. Depending on the measurement setup, the signal path is scaled to the needs for the measurement setup.

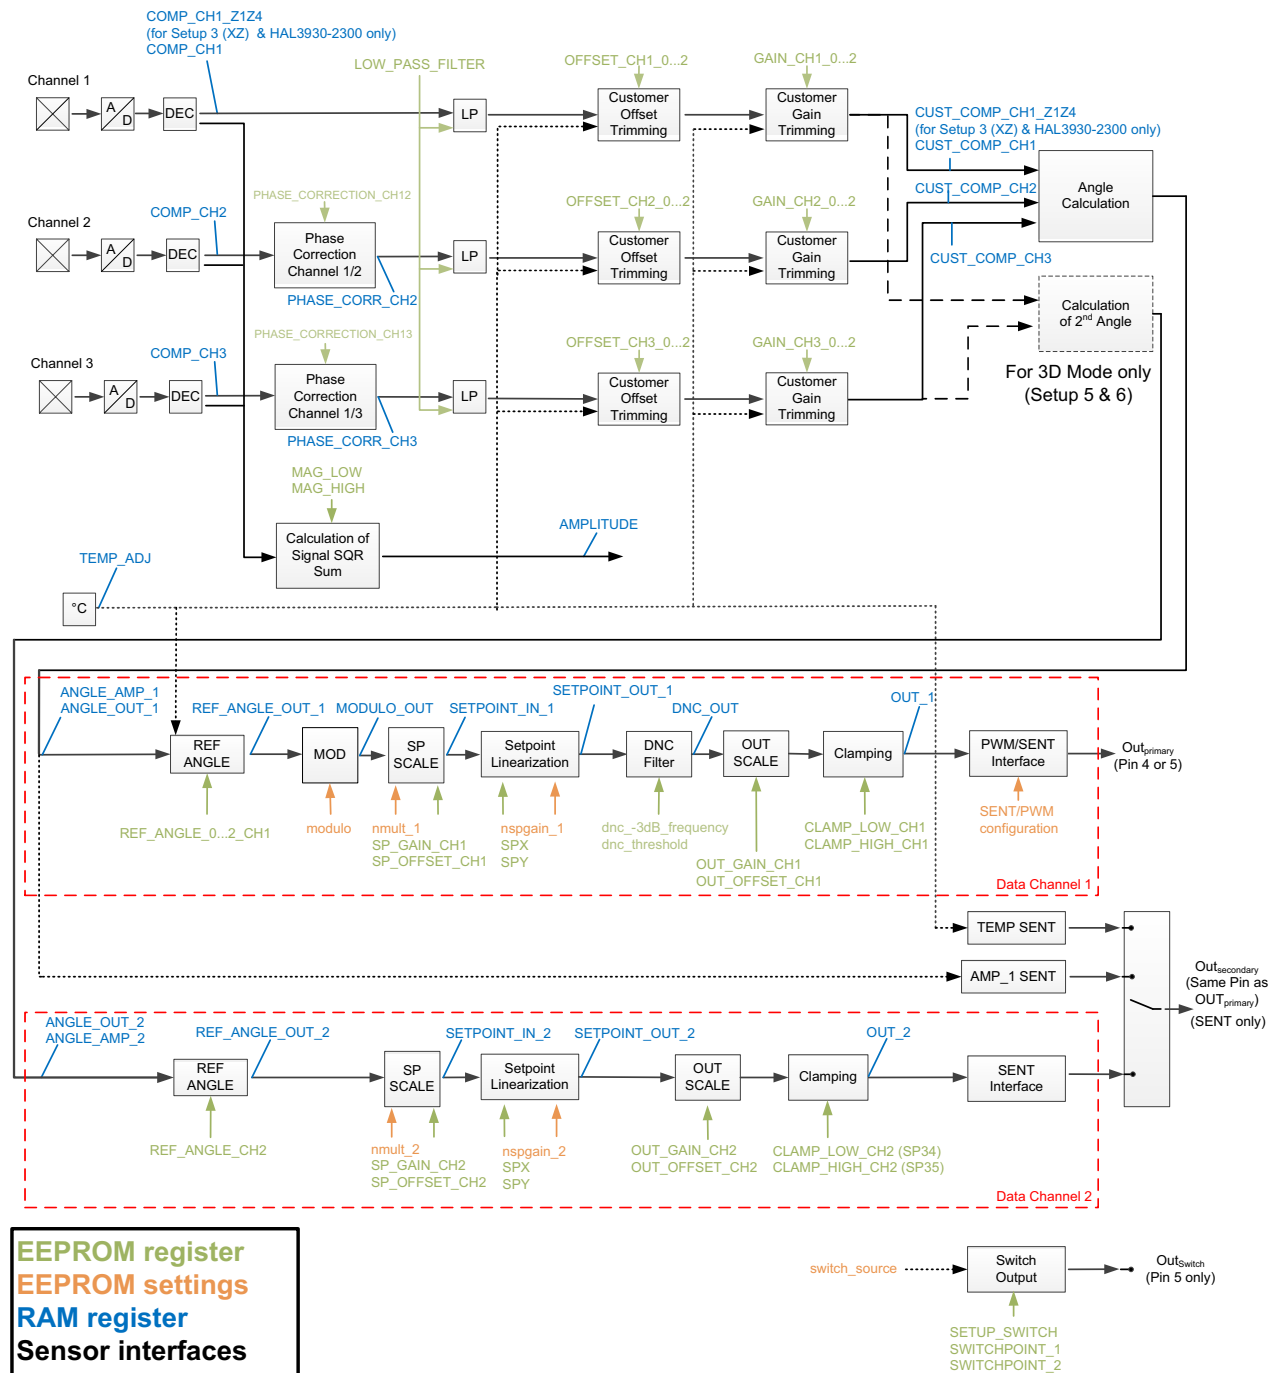


Fig. 3–3: Signal path of HAL 3930

The sensor signal path contains two kinds of registers. Registers that are read-only and programmable registers (non-volatile memory). The **read-only (RAM) registers** contain measurement data at certain steps of the signal path and the **non-volatile memory registers (EEPROM)** change the sensor's signal processing. **EEPROM settings** are individually configurable bits within an EEPROM register.

3.3. Register Definition

Note Further details about the programming of the device and detailed register setting description as well as memory map can be found in the document: HAL/HAR/HAC 393x User Manual.

3.3.1. RAM Registers

TEMP_TADJ

The TEMP_TADJ register contains already the TDK-Micronas' compensated digital value of the sensor's junction temperature.

COMP_CH1, COMP_CH2 and COMP_CH3

COMP_CH1, COMP_CH2 and COMP_CH3 registers contain the TDK-Micronas' temperature compensated magnetic-field information of channel 1, channel 2 and channel 3.

COMP_CH1_Z1Z4

The COMP_CH1_Z1Z4 register is only available in case of Setup 3 and the $\Delta X \Delta Z$ mode. It contains the temperature compensated magnetic field information of the differential ΔZ magnetic-field $\Delta Z = Z4 - Z1$. This register is only available in HAL 3930-2300.

AMPLITUDE

The AMPLITUDE register contains sum of squares of the magnetic-field amplitude of all three channels calculated with the following equation. In case of two channels only the first two terms are used. This information is used for the magnet lost detection:

$$\text{AMPLITUDE} = \frac{\text{COMP_CH1}^2}{32768} + \frac{\text{COMP_CH2}^2}{32768} + \frac{\text{COMP_CH3}^2}{32768}$$

PHASE_CORR_CH2, PHASE_CORR_CH3

PHASE_CORR_CHx registers contain the customer compensated magnetic-field information of channel 2 and channel 3 after customer phase-shift error correction using the PHASE_CORRECTION_CHx registers.

CUST_COMP_CH1, CUST_COMP_CH2 and CUST_COMP_CH3

CUST_COMP_CH1, CUST_COMP_CH2 and CUST_COMP_CH3 registers contain the customer compensated magnetic-field information of channel 1, channel 2 and channel 3 used for the angle calculation. These register contain already the customer phase-shift, gain and offset corrected data.

CUST_COMP_CH1_Z1Z4

The CUST_COMP_CH1_Z1Z4 register is only available in case of Setup 3 and the $\Delta X \Delta Z$ mode. It contains the customer compensated magnetic field information of the differential ΔZ magnetic-field $\Delta Z = Z4 - Z1$ used for the angle calculation. This register is only available in HAL 3930-2300.

ANGLE_OUT_x

The ANGLE_OUT_1 and ANGLE_OUT_2 registers contain the digital value of the position calculated by the angle calculation algorithm. ANGLE_OUT_1 is always available and ANGLE_OUT_2 is a customer configuration option only available for 3D measurements with on pixel cell enabling the calculation of a second angle out of B_x , B_y and B_z of Pixel1.

ANGLE_AMP_x

The ANGLE_AMP_1 and ANGLE_AMP_2 registers contain the digital value of the magnetic-field amplitude calculated by the angle calculation algorithm. ANGLE_AMP_1 is always available and ANGLE_AMP_2 is a customer configuration option only available for 3D measurements with on pixel cell enabling the calculation of a second angle out of B_x , B_y and B_z .

REF_ANGLE_OUT_x

The REF_ANGLE_OUT_x registers contain the digital value of the angle information after setting the reference angle defining the zero angle position.

MODULO_OUT

The MODULO_OUT register contains the digital value of the angle information after applying the modulo calculation algorithm. MODULO_OUT is only available for the primary angle output.

SETPOINT_IN_x

The SETPOINT_IN_x registers contain the digital value of the angle information after the setpoint scaling block and are the values used for the input of the setpoint linearization block.

SETPOINT_OUT_x

The SETPOINT_OUT_x registers contain the digital value of the angle information after the setpoint linearization block.

DNC_OUT

The DNC_OUT register contains the digital value of the angle information after the DNC filter. DNC_OUT is only available for the primary angle output.

OUT_x

The OUT_x registers contain the digital value of the angle information after all signal processing steps and depend on all customer configuration settings.

DIAGNOSIS

The DIAGNOSIS_0 and DIAGNOSIS_1 registers report certain failures detected by the sensor. HAL 3930 performs self-tests during power-up as well as continues system integrity tests during normal operation. The result of those tests is reported via the DIAGNOSIS_X registers (further details can be found in see Section 4.2. on page 45).

Micronas IDs

The MIC_ID1 and MIC_ID2 registers are both 16-bit organized. They are read only and contain TDK-Micronas production information, like X,Y position on the wafer, wafer number, etc. This register content will be send via the SENT interface if the serial message channel has been activated.

3.3.2. EEPROM Registers

Application Modes

HAL 3930 can be configured in different application modes. Depending on the required measurement task one of the application modes can be selected. The register SETUP_FRONTEND (Table 3–2 on page 28) defines the different available modes.

– Setup 1: 180° rotary (stray-field compensated)

This mode uses six horizontal Hall-plates to measure a 180° angular range. It requires a 4-pole magnet. Speciality of this mode is that the device can compensate stray-fields according to ISO 11452-8 definition as well as disturbing gradients generated for example by a current conducting wire. Fig. 3–4 shows the related signal path.

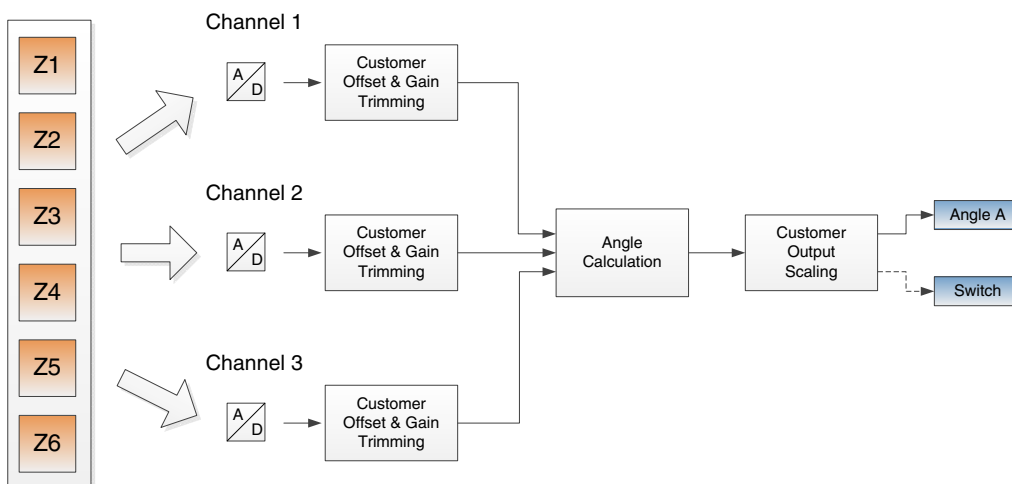


Fig. 3–4: Signal path diagram of setup 1 (stray-field robust 180° measurement)

– Setup 2: 360° rotary (stray-field compensated)

This mode uses horizontal Hall-plates to measure a 360° angular range. It requires a 2-pole magnet. The device can compensate stray fields according to ISO 11452-8 definition. Fig. 3–5 shows the related signal path.

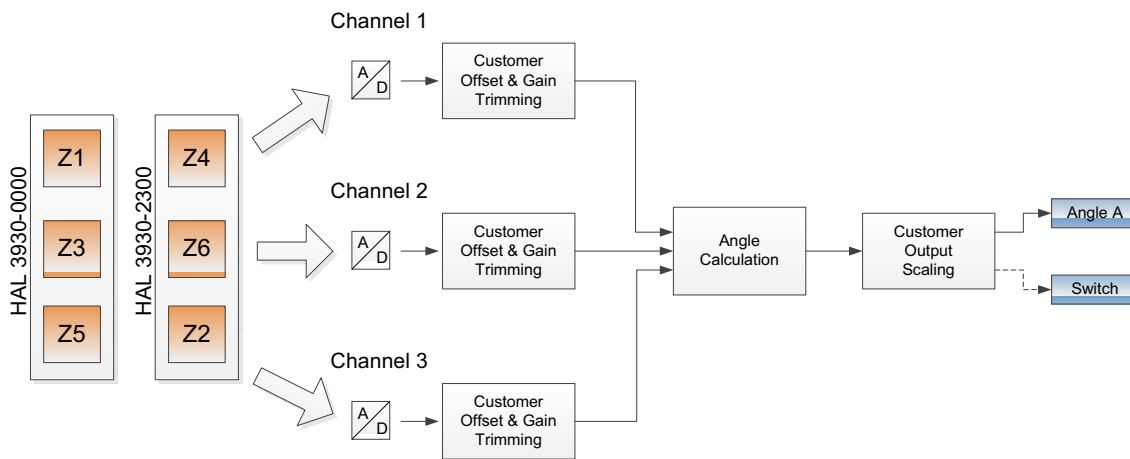


Fig. 3–5: Signal path diagram of setup 2 (stray-field robust 360° measurement)

Note HAL 3930-0000 is using the Z-Plates Z1, Z3, Z5 and HAL 3930-2300 Z4, Z6, Z2.

– Setup 3: Linear movement or off-axis rotary (stray-field compensated)

This mode uses a combination of horizontal and vertical Hall-plates to measure a stray-field compensated linear movement (ΔB_x & ΔB_z of 3D Pixel Cells 1 and 2). Alternatively, this setup can be used as well for off-axis stray-field compensated angular measurements in case that a combination of vertical Hall-plates is selected (ΔB_x & ΔB_y of 3D Pixel Cells 1 and 2). The device can compensate stray-fields according to ISO 11452-8 definition. Fig. 3–6 shows the related signal path for $\Delta X\Delta Y$ setup and Fig. 3–7 & Fig. 3–8 the signal path for $\Delta X\Delta Z$ setup.

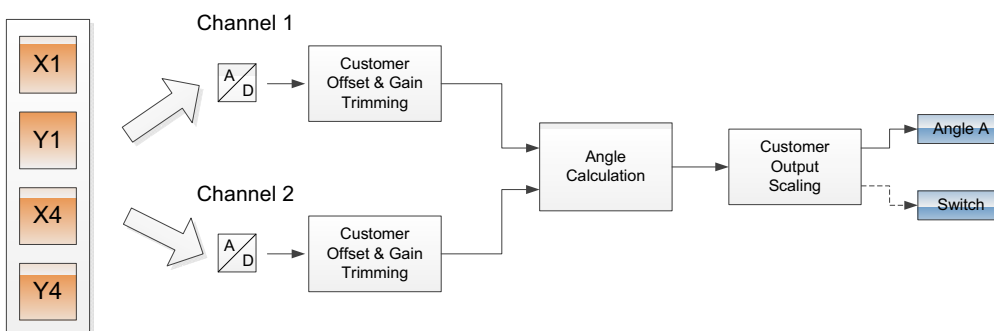


Fig. 3–6: Signal path diagram of setup 3a - $\Delta X\Delta Y$ (stray-field robust off-axis position detection)

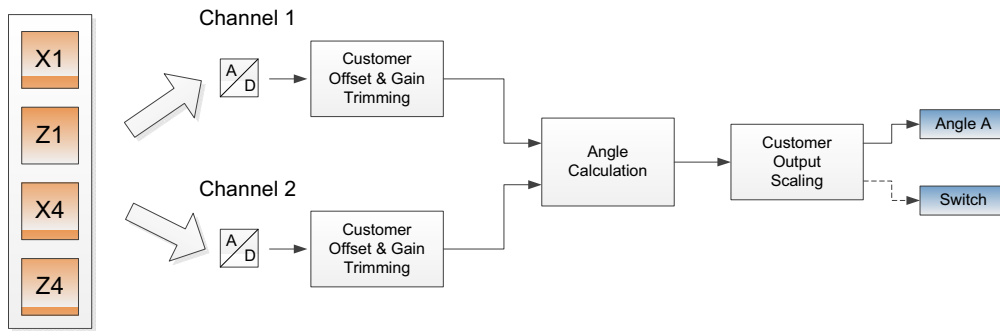


Fig. 3–7: Signal path diagram of setup 3b – $\Delta X\Delta Z$ (stray-field robust linear position detection) in case of HAL 3930-0000

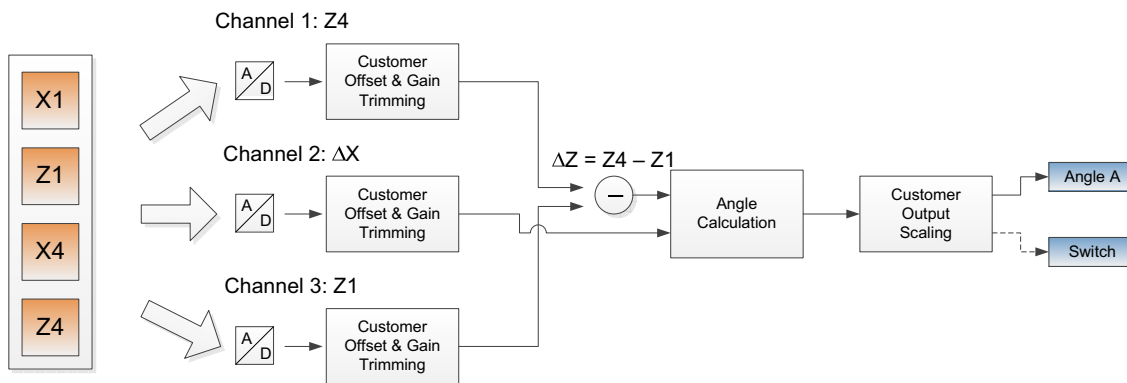


Fig. 3–8: Signal path diagram of setup 3b – $\Delta X\Delta Z$ (stray-field robust linear position detection) in case of HAL 3930-2300

For the linear movement setup the angle calculation is done by using the following equation:

$$\text{ALPHA} = \text{ATAN2}\left(\frac{\Delta BZ}{\Delta BX}\right) = \text{ATAN2}\left(\frac{BZ_4 - BZ_1}{BX_4 - BX_1}\right)$$

For the off-axis rotary setup the angle calculation is done by using the following equation:

$$\text{ALPHA} = \text{ATAN2}\left(\frac{\Delta BY}{\Delta BX}\right) = \text{ATAN2}\left(\frac{BY_4 - BY_1}{BX_4 - BX_1}\right)$$

Note HAL 3930-2300: GAIN_CH1_0...2 and GAIN_CH3_0...2 must be set to the same value for this specific setup (3b). OFFSET_CH3_0...2 must be set to zero.

– Setup 4a: 360° rotary or linear movement measurement without stray-field compensation

This mode uses horizontal and vertical Hall-plates to measure B_x , B_y , B_z of Pixel Cell 1. The angle will be calculated out of combinations of B_y/B_x , B_z/B_x or B_z/B_y . This mode does not compensate stray-fields. The measurement setup is similar to the well known HAL 37xy family from TDK-Micronas.

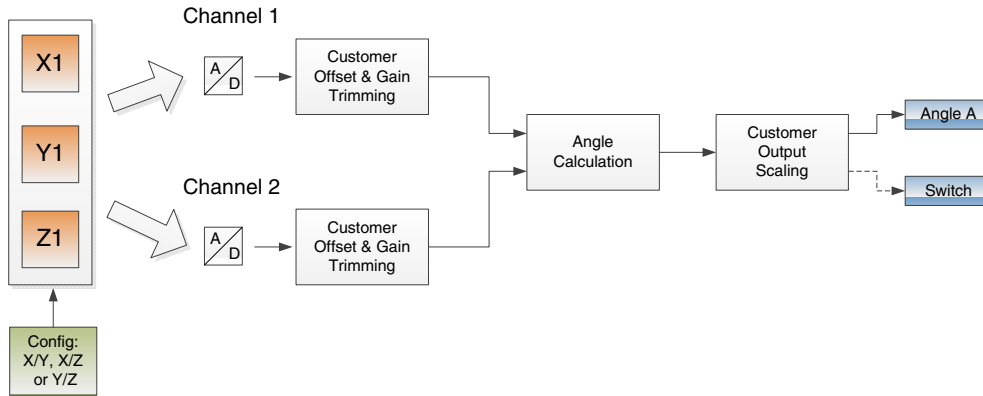


Fig. 3–9: Signal path diagram of setup 4a (rotary or linear position detection w/o stray-field compensation)

– Setup 4b: Virtual centered pixel cell mode for 360° rotary or linear movement measurement (w/o stray-field compensation)

In addition to setup 4a, it is possible to select a virtual centered pixel cell mode (4b). In this mode the signals in X and Y direction of both Pixel Cells P1 and P2 are combined and averaged to generate one virtual centered pixel in the middle of the Hall-plate array.

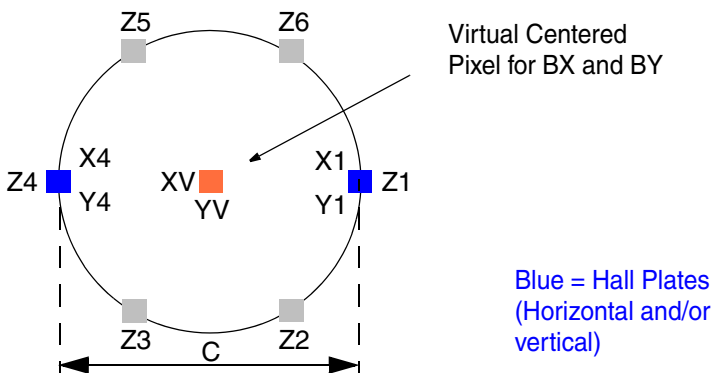


Fig. 3–10: Virtual centered pixel for B_x and B_y in mode 4b

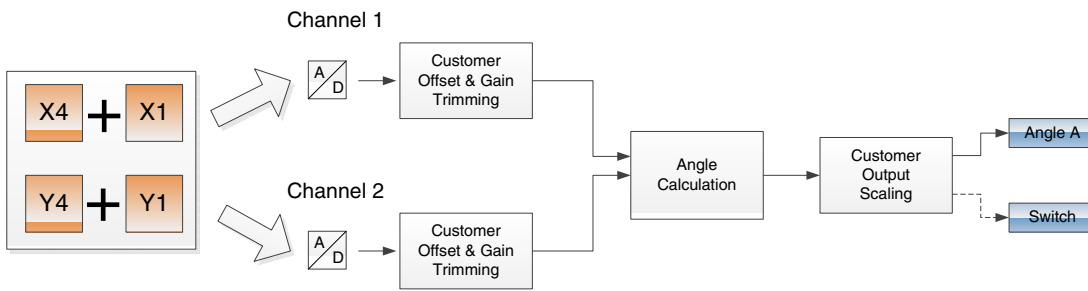


Fig. 3–11: Signal path diagram of setup 4b (virtual centered pixel w/o stray-field compensation)

$$B_{XV} = \left(\frac{BX_1 + BX_4}{2} \right)$$

$$B_{YV} = \left(\frac{BY_1 + BY_4}{2} \right)$$

– Setup 5: 3D measurement with calculation of two angles (ARCTAN2 calculation)

This mode uses horizontal and vertical Hall-plates to measure B_x , B_y , B_z of Pixel Cell 1. The angle will be calculated out of combinations of B_z/B_x and B_z/B_y . This mode does not compensate any stray-fields.

The angle calculation is done by using the following equations:

$$\text{ALPHA} = \text{ATAN2} \left(\frac{BZ}{BX} \right)$$

$$\text{BETA} = \text{ATAN2} \left(\frac{BZ}{BY} \right)$$

Both calculated angles are sent via SENT interface by using the H.1. format (Table 3–10 on page 37). See Fig. 3–12 for detailed signal path.

– Setup 6: 3D measurement with calculation of two angles (joystick equation)

This mode uses horizontal and vertical Hall-plates to measure B_x , B_y , B_z of Pixel Cell 1. The angle will be calculated by a special equation optimized for “joystick” setups. This mode does not compensate any stray fields.

The angle calculation is done by using the following equations:

$$\text{ALPHA} = \text{ATAN}\left(\frac{\sqrt{\text{CUST_COMP_CH1}^2 + (\text{JOYSTICK_KT} \times \text{CUST_COMP_CH3})^2}}{\text{CUST_COMP_CH2}}\right)$$

$$\text{BETA} = \text{ATAN}\left(\frac{\sqrt{\text{CUST_COMP_CH1}^2 + (\text{JOYSTICK_KT} \times \text{CUST_COMP_CH2})^2}}{\text{CUST_COMP_CH3}}\right)$$

Both calculated angles are sent via SENT interface by using the H.1. format (Table 3–10 on page 37).

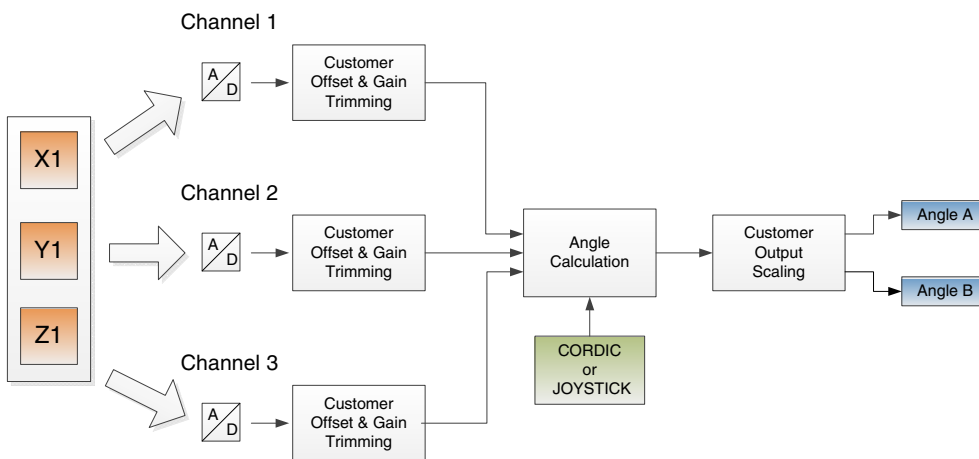


Fig. 3–12: Signal path diagram of setup 5 & 6 (3D measurement setup)

JOYSTICK_KT

The equation for the angle calculation in Setup 6 (Joystick 3D measurement) is using a gain factor JOYSTICK_KT. JOYSTICK_KT is a 16 bit register.

Customer IDs

The customer ID registers (CUSTOMER_ID0 to CUSTOMER_ID9) contain of 10 times 16-bit words and can be used to store customer production information, like serial number or project information for PWM output. Additionally they are used to code SENT slow channel information like OEM codes, sensor type information and fast channel transfer characteristics. The customer IDs will be part of the SENT slow channel in case that the SENT output is activated and transmission via slow channel is selected as well. Please see Table 3–17 on page 42 for further details.

Magnetic Range Check

The magnetic range check uses the AMPLITUDE register value and compares it with an upper and lower limit threshold defined by the customer programmable registers MAG_LOW and MAG_HIGH. If either low or high limit is exceeded, the sensor will indicate an error.

Mag-Low Limit

MAG_LOW defines the low level for the magnetic-field range check function.

Mag-High Limit

MAG-HIGH defines the high level for the magnetic-field range check function.

MAG_LOSS_OUTPUT

The MAG_LOSS_OUTPUT register has two different functions depending on the selected output format. It is only available in HAL 3930-2300.

The device will transmit the register value as PWM duty-cycle in case of magnet loss detection (AMPLITUDE is below the Mag-Low limit). The 12 LSB's are used for the 2-kHz PWM frequency and the 13 LSBs for all other frequencies. Default value is (0x0FAD = 98% for the 12 bit value).

The device will send the 12 LSB's of this register in case of an activated SENT output and if the bit sent_mag_loss of the SETUP_PROTOCOL register has been set to one.

Phase Correction

PHASE_CORRECTION_CH12 and PHASE_CORRECTION_CH13 can be used to compensate a phase shift of channel 2 and channel 3 in relation to channel 1.

Neutral value for the registers is zero (no phase-shift correction).

Low-Pass Filter

With the LOW_PASS_FILTER register it is possible to select different –3 dB frequencies for HAL 3930. The default value is zero (low pass filter disabled). The filter frequency is valid for all channels.

OFFSET_CHx_0...2

OFFSET_CH1_0...2, OFFSET_CH2_0...2 and OFFSET_CH3_0...2 support three polynomials of second order and describe the temperature compensation of the offset of channel 1, channel 2, and channel 3 (compensating a remaining offset in each of the three channels). This means a constant, linear and quadratic offset factor can be programmed for up to three channels (temperature dependent offset).

Note HAL 3930-2300: OFFSET_CH3_0...2 must be set to zero in case of Setup3 with $\Delta X\Delta Z$ mode.

GAIN_CHx_0...2

GAIN_CH1_0...2, GAIN_CH2_0...2 and GAIN_CH3_0...2 support three polynomials of second order and describe the temperature compensation of the sensitivity of channel 1, channel 2 and channel 3 (compensating the amplitude mismatches between three channels). This means a constant, linear and quadratic gain factor can be programmed individually for the three channels (temperature dependent gain).

Note HAL 3930-2300: GAIN_CH3_0...2 must be set to the same value of GAIN_CH1_0...2 in case of Setup 3 with $\Delta X\Delta Z$ mode

Reference Angle Position

The output signal zero position defines the reference position for the angle output and therefore it is possible to shift the discontinuity point in the output characteristics out of the measurement range with these parameters. It can be set to any value of the angular range.

REF_ANGLE_0...2_CH1 defines a polynomial of second order with REF_ANGLE_0_CH1 (constant part), REF_ANGLE_1_CH1 (linear part) and REF_ANGLE_2_CH1 (quadratic part). REF_ANGLE_CH2 is a temperature independent (constant factor) and only available in case that the secondary channel is activated.

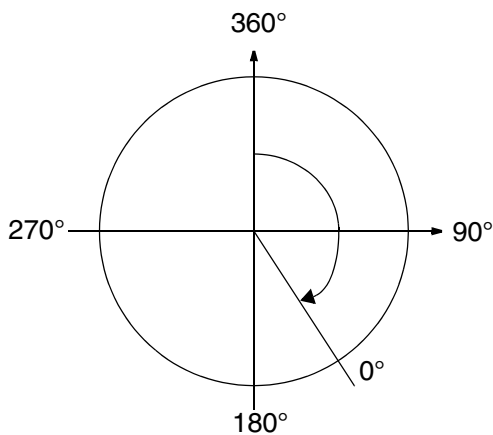


Fig. 3–13: Example definition of zero degree point

Modulo Select

HAL 3930 can split the 360° measurement range into sub-ranges of 90°, 120° and 180°. For example in the 90° sub-range output signal is repeating after 90°. The MODULO register can be used to select between these four different output ranges. Modulo function can only be applied on the primary output channel.

The desired modulo calculation can be selected by setting certain bits in the SETUP_FRONTEND register.

nmult_x (EEPROM Setting)

nmult_1 and nmult_2 define the gain exponent for the setpoint scaling block on the data channel. The factor is multiplied by SP_GAIN_CHx to achieve gain factors up to 128. (SETUP_DATAPATH[11:9] bits (= nmult_2), SETUP_DATAPATH[7:5] bits (= nmult_1).

Setpoint Gain

SP_GAIN_CH1 and SP_GAIN_CH2 define the output gain for the primary and secondary data channels. They are used to scale the position information to the input range of the linearization block. SP_GAIN_CH2 is only available for modes with a calculation of a secondary angle.

Setpoint Offset

SP_OFFSET_CH1 and SP_OFFSET_CH2 define the output offset for the primary and secondary data channels. SP_OFFSET_CH2 is only available for modes with a calculation of a secondary angle.

Setpoint Linearization

The setpoint linearization block enables the linearization of the sensor's output characteristic for the customer's application. For fixed setpoints it consists of 33 setpoints for one data channel (SP0, SP1, ..., SP32) or 34 setpoints for two channels (17 setpoints each data channel; two times SP0, SP1, ..., SP16). Each setpoint is defined by its fixed x position and its programmable y value. The setpoint x positions (SP(n)_X) are equally distributed between $-32768 \dots 32767$ LSB along the signal range.

If variable setpoints are enabled (SETUP_DATAPATH[0] = 1), both position values (x and y) of the setpoints are programmable.

The setpoint registers have a length of 16 bits and are two's complement coded. Therefore the setpoint register values can vary between $-32767 \dots 32767$ LSB. The setpoint x values are stored as absolute values and the setpoint y values differentially to the corresponding x values. The setpoint register values are initially set to 0 (neutral) by default.

The setpoint linearization block works in a way that the incoming signal (SETPOINT_IN_x value) is interpolated linearly between two adjacent setpoints (SP(n) and SP(n+1)). The resulting SETPOINT_OUT_x register value represents the angular information after the setpoint scaling.

In case of variable setpoints are selected nspgain_x (nspgain_1 & nspgain_2) registers must be used.

nspgain_x (EEPROM Settings)

The SETUP_DATAPATH[15:12] bits (= nspgain_2) and SETUP_DATAPATH[4:1] bits (= nspgain_1) set the gain exponent for the setpoint slope on data channel 1 and 2. With the 4 bits it is possible to get gains up to 65536.

DNC Filter Registers (dnc_-3dB_frequency & dnc_threshold)

The DNC (Dynamic Noise Cancellation) filter decreases the output noise significantly by adding a low-pass filter with a very low cut-off frequency for signals below a certain signal change threshold (dnc_threshold, DNC[15:8]). The attenuation factor dnc_-3dB_frequency of this IIR filter can be selected by the bits DNC[7:0] of the DNC registers. Both parameters have a length of 8 bits.

Signals with a very low amplitude (signals classified as noise e.g. $\pm 0.5^\circ$) and periodic movements with an amplitude lower than 1° will be filtered whereas signals with a higher amplitude are untouched (i. e. rapid movements). The activation of the DNC filter has no impact on the resolution of the output and does not add any additional processing delay.

For dnc_threshold only values from 0 to 255 are allowed. For the dnc_-3dB_frequency only cutoff frequencies up to 50% of the sample frequency ($0.5 * f_{dec sel}$) are allowed. To disable the DNC filter both registers must be set to 0.

OUT_OFFSET_CHx

The registers OUT_OFFSET_CH1 and OUT_OFFSET_CH2 are used as the final offset scaling stage for the desired output signal. The registers have a length of 16 bits and are two's complement-coded.

OUT_GAIN_CHx

The registers OUT_GAIN_CH1 and OUT_GAIN_CH2 are used as the final gain scaling stage for the desired output signal. They can also be used to invert the output signal. The registers have a length of 16 bits and are two's complement-coded.

Clamping Levels (CLAMP-LOW & CLAMP-HIGH)

The clamping levels CLAMP_LOW_CH1/CH2 and CLAMP_HIGH_CH1/CH2 define the maximum and minimum output values. All four registers have a length of 16 bits and are two's complement-coded. Both clamping levels can have values between 0 % and 100 %.

PWM_STD_ERROR

The PWM_STD_ERROR register defines the output duty-cycle for the PWM output in case of an internal error (except MAG_LOW or under-/overvoltage error indication). The 12 LSB's are used for the 2 kHz PWM frequency and the 13 LSB's for all other frequencies. Default value is (0x0FEB = 99.5% for the 12 bit value). This register is only available in HAL 3930-2300.

SWITCHPOINT_1 and SWITCHPOINT_2 (Switch Function)

HAL 3930 also features an additional switch output. It is possible to define the switching levels with the registers SWITCHPOINT_1 and SWITCHPOINT_2. The switching levels on/off can be set in percentage of full-scale of the reference signal. Further details can be found in the HAL/HAR/HAC 393x User Manual.

SETUP_SWITCH (EEPROM Setting)

The setup switch register can be used to configure the switch behavior. It is possible to select between different sources for the switch function. Also the switch start-up state, the polarity, a hysteresis and the switch behavior (high-side or low-side) can be defined. The below table describes in detail the available combinations.

Table 3–1: SETUP_SWITCH

| Bit No. | Function | Description |
|---------|----------------------|---|
| 15 | switch_enable | 0: Switch function disabled 1: Switch output enabled |
| 14 | switch_startup_state | Internal (logic) state after POR, regarding hysteresis behavior 0: Output in OFF state 1: Output in ON state |
| 13 | switch_driven_lv | 0: Active level is high 1: Active level is low |
| 12 | switch_polarity | 0: No output inversion 1: Output inverted |
| 11:8 | switch_source | 0000: Primary output - OUT_1 0001: SETPOINT_OUT_1 0010: ANGLE_OUT_1 0011: Amplitude of primary output - ANGLE_AMP_1 0100: Secondary output - OUT_2 0101: SETPOINT_OUT_2 0110: ANGLE_OUT_2 0111: Amplitude of secondary output - ANGLE_AMP_2 1000: AMPLITUDE 1001: CUST_COMP_CH1 1010: CUST_COMP_CH2 1011: CUST_COMP_CH2 1100: COMP_CH1 1101: COMP_CH2 1110: COMP_CH3 1111: Chip temperature - TADJ |
| 7:0 | switch_hyst | Switch hysteresis $\text{switch_hyst} = \text{Switch hysteresis} / 8$ One LSB equals 8 counts (respectively 0.5 12 bit SENT counts) |

Supply Voltage Supervision

As the device supports a wide supply voltage range it is beneficial to enable customer programmable under/overvoltage detection levels. The register UV_LEVEL defines the undervoltage detection level in mV and OV_LEVEL the overvoltage detection level. The SUPPLY_SUPERVISION register has a length of 16 bits. OV_LEVEL uses the 8 MSBs and UV_LEVEL the 8 LSBs. For both levels, 1 LSB is typically equal to 100 mV.

Customer Configuration Registers

SETUP_FRONTEND, SETUP_DATAPATH and SETUP_OUTPUT register are 16-bit registers that enable the customer to activate various functions of the sensor.

The following tables describe in detail the available combinations and resulting functions.

Table 3–2: SETUP_FRONTEND for HAL 3930-0000

| Bit No. | Function | Description | | | | |
|---------|---------------|--|---|---|--|--|
| 15 | customer_lock | Customer Lock: 0: Unlocked 1: Locked | | | | |
| 14:8 | - | Must be set to 0. | | | | |
| 7:6 | modulo | Modulo operation: 00: 360° 01: Modulo 90° 10: Modulo 120° 11: Modulo 180° | | | | |
| 5:4 | fdecsel | A/D converter sample frequency: 00: 2 kSps 01: 4 kSps 10: 8 kSps 11: not supported | | | | |
| 3:0 | meas_config | Measurement setups: 0000: Setup 4a - 2D 0001: Setup 4a - 2D 0010: Setup 4a - 2D 0011: Setup 3b - 2D - Strayfield compensated 0100: Setup 3a - 2D - Strayfield compensated 0101: Setup 4b - 2D - Virtual centered pixel 0110: Setup 1 - 180° rotary - strayfield compensated 0111: Setup 2 - 360° rotary - strayfield compensated 1000: Setup 5 - 3D measurement - ATAN2 1001: Setup 5 - 3D measurement - Joystick 1010 to 1111: Must not be used | Correspond. Signal Path With two channels With two channels With two channels With two channels With two channels With two channels 6 Z Hall-plates 3 Z Hall-plates With three channels With three channels - | CH1 X1 Z1 Z1 Z4-Z1 X4-X1 X1+X4 Z1+Z4 Z1 Z1 Z1 - | CH2 Y1 Y1 X1 X4-Y1 Y1+Y4 Z2+Z5 Z3 X1 X1 - | CH3 - - - - - - Z3+Z6 Z5 Y1 Y1 - |

Table 3–3: SETUP_FRONTEND for HAL 3930-2300

| Bit No. | Function | Description | | | | |
|---------|---------------|--|---|--|--|---|
| 15 | customer_lock | Customer Lock: 0: Unlocked 1: Locked | | | | |
| 14:8 | - | Must be set to 0. | | | | |
| 7:6 | modulo | Modulo operation: 00: 360° 01: Modulo 90° 10: Modulo 120° 11: Modulo 180° | | | | |
| 5:4 | fdecsel | A/D converter sample frequency: 00: 2 kSps 01: 4 kSps 10: 8 kSps 11: not supported | | | | |
| 3:0 | meas_config | Measurement setups: 0000: Setup 4a - 2D 0001: Setup 4a - 2D 0010: Setup 4a - 2D 0011: Setup 3b - 2D - Strayfield compensated 0100: Setup 3a - 2D - Strayfield compensated 0101: Setup 4b - 2D - Virtual centered pixel 0110: Setup 1 - 180° rotary - strayfield compensated 0111: Setup 2 - 360° rotary - strayfield compensated 1000: Setup 5 - 3D measurement - ATAN2 1001: Setup 5 - 3D measurement - Joystick 1010 to 1111: Must not be used | Correspond. Signal Path With two channels With two channels With two channels With two channels With two channels With two channels 6 Z Hall-plates 3 Z Hall-plates With three channels With three channels - | CH1 X1 Z1 Z1 Z4 X4-X1 X1+X4 Z1+Z4 Z4 Z1 Z1 - | CH2 Y1 Y1 X1 X4-Y1 Y1+Y4 Z2+Z5 Z6 X1 X1 - | CH3 - - - Z1 - - Z3+Z6 Z2 Y1 Y1 - |

Table 3–4: SETUP_DATAPATH

| Bit No. | Function | Description |
|---------|--------------------|---|
| 15:12 | nspgain_2 | Gain exponent for setpoint slope in channel 2: Slope = SPGn * (2 ^{nspgain_2} +1) |
| 11:9 | nmult_2 | Gain exponent for SETPOINT_IN2: SP_GAIN = SP_GAIN_CH2 * [2 ^(nmult_2)] |
| 0 | two_channels | Activation of second output channel 0: 1 channel with setpoints 1: 2 channels with setpoints each |
| 7:5 | nmult_1 | Gain exponent for SETPOINT_IN1: SP_GAIN = SP_GAIN_CH1 * [2 ^(nmult_1)] |
| 4:1 | nspgain_1 | Gain exponent for setpoint slope in channel 1: Slope = SPGn * (2 ^{nspgain_1} +1) |
| 0 | variable_setpoints | Fixed/variable setpoint selection: 0: Fixed setpoints 1: Variable setpoints |

The SETUP_OUTPUT register is used to configure the two output pins OUT1 (pin 4) and OUT2 (pin 5). First of all, it is possible to define the output pin for the primary output protocol pin, i.e. OUT1 or OUT2. This can be SENT or PWM. OUT1 can be configured as push-pull output with different slew rates ($V_{OUTmax} < 5.5\text{ V}$) or as an open-drain output without slew rate control. OUT2 is as well a push-pull output, but the max. output voltage is V_{SUP} . It can be configured as open-drain or push-pull output. For both outputs a protection circuit is still connected to V_{SUP} (in open-drain output configuration) so that V_{OUT} shall not be higher than V_{SUP} .

Furthermore, this register is used to define the error behavior in case of a PWM output, the signal frequencies as well as the configuration of the SENT output. Further details can be found in Table 3–5 and Table 3–6 .

Table 3–5: SETUP_OUTPUT for HAL 3930-0000

| Bit No. | Function | Description |
|--|-----------------|--|
| 15 | primary_output | Primary output protocol selection (OUT1 - pin 4): 0: PWM 1: SENT |
| 14 | primary_out_pin | Defines which output pin is used for the primary output 0: OUT1 (pin 4) - with slew rate control 1: OUT2 (pin 5) - no slew rate control |
| PWM Output (SETUP_OUTPUT[15] = 0) | | |
| 13:10 | pwm_slew_rate | PWM slew rates (OUT1 - pin 4 only): 0xxx: slew rate control disabled 1000: Fall = 5 V/0.5 μ s, Rise = 5 V/0.5 μ s 1001: Fall = 5 V/0.5 μ s, Rise = 5 V/1.3 μ s 1010: Fall = 5 V/0.7 μ s, Rise = 5 V/0.7 μ s 1011: Fall = 5 V/0.7 μ s, Rise = 5 V/2.6 μ s 1100: Fall = 5 V/1.3 μ s, Rise = 5 V/1.3 μ s 1101: Fall = 5 V/1.3 μ s, Rise = 5 V/5.2 μ s 1110: Fall = 5 V/2.6 μ s, Rise = 5 V/2.6 μ s 1111: Fall = 5 V/2.6 μ s, Rise = 5 V/10.4 μ s Measured from 1.1V to/from 3.8 V with C _{LOUT} = 1 nF |
| 9:8 | - | Must be set to 0. |
| 7 | pwm_open_drain | This bit defines if OUTx is used as push-pull or open-drain output. 0: Push-pull 1: Open-drain (protection diode to VSUP still connected) |
| 6 | pwm_uvov_diag | Output behavior for undervoltage/overvoltage detection 0: Will be signaled as selected for all other diagnosis bits 1: Will be signaled with 2 % duty-cycle |
| 5 | pwm_inverted | PWM inverted: 0: Disabled 1: Enabled |
| 4 | pwm_error_high | Behavior of output during error (% duty cycle, all errors except magnet loss): 0: 0.5 % duty cycle 1: 99.5 % duty cycle |
| 3:0 | pwm_frequency | Min. PWM frequency 0000: 2.0 kHz 0001: 1.5 kHz 0010: 1.0 kHz 0011: 800 Hz 0100: 550 Hz 0101: 500 Hz 0110: 250 Hz 0111: 200 Hz 1000: 150 Hz 1001: 100 Hz 1010 to 1111: Not allowed Typical values are 3% higher. |

Table 3–5: SETUP_OUTPUT for HAL 3930-0000, continued

| Bit No. | Function | Description | | | | | | | | | | | | | | | | | | |
|---|---------------------|--|----------------|---------------------|-------------------|-----------------|----------------|-----------------|----------------|-----------------|----------------|-----------------|----------------|-----------------|----------------|-----------------|----------------|-----------------|----------------|-----------------|
| SENT Output (SETUP_OUTPUT[15] = 1) | | | | | | | | | | | | | | | | | | | | |
| 13:10 | sent_slew_rate | SENT slew rates (OUT1 - pin 4 only): 0xxx: slew rate control disabled 1000: Fall = 5 V/0.5µs, Rise = 5 V/0.5µs 1001: Fall = 5 V/0.5µs, Rise = 5 V/1.3µs 1010: Fall = 5 V/0.7µs, Rise = 5 V/0.7µs 1011: Fall = 5 V/0.7µs, Rise = 5 V/2.6µs 1100: Fall = 5 V/1.3µs, Rise = 5 V/1.3µs 1101: Fall = 5 V/1.3µs, Rise = 5 V/5.2µs 1110: Fall = 5 V/2.6µs, Rise = 5 V/2.6µs 1111: Fall = 5 V/2.6µs, Rise = 5 V/10.4 µs Measured from 1.1V to/from 3.8 V with C _{LOUT} = 1 nF | | | | | | | | | | | | | | | | | | |
| 9:8 | sec_out | Secondary output selection (2 nd fast channel SENT): 0: Reserved 1: Transmission of second angle (SENT format H.1 - Table 3–9 on page 36) 2: Transmission of magnetic amplitude (SENT format H.1 - Table 3–9 on page 36) 3: Transmission of chip temperature (SENT format H.1 - Table 3–9 on page 36) | | | | | | | | | | | | | | | | | | |
| 7 | sent_pp | Pause pulse activation 0: Disabled (SENT continuous) 1: Enabled (SENT with pause pulse) | | | | | | | | | | | | | | | | | | |
| 6:4 | sent_tt | SENT tick time selection (typ. value) 000: 1.00 µs 001: 1.50 µs 010: 2.00 µs 011: 2.50 µs 100: 2.75 µs 101: 3.00 µs 110: 6.00 µs 111: 12.0 µs Note: Not all combinations of tick time and repetition rate are possible. | | | | | | | | | | | | | | | | | | |
| 3:0 | sent_fr | <table border="0"> <tr> <td>SENT data rate</td> <td>SENT message length</td> </tr> <tr> <td>0000: Not allowed</td> <td>1000: 225 ticks</td> </tr> <tr> <td>0001: 4.00 kHz</td> <td>1001: 239 ticks</td> </tr> <tr> <td>0010: 2.66 kHz</td> <td>1010: 250 ticks</td> </tr> <tr> <td>0011: 2.00 kHz</td> <td>1011: 269 ticks</td> </tr> <tr> <td>0100: 1.60 kHz</td> <td>1100: 294 ticks</td> </tr> <tr> <td>0101: 1.00 kHz</td> <td>1101: 366 ticks</td> </tr> <tr> <td>0110: 0.80 kHz</td> <td>1110: 375 ticks</td> </tr> <tr> <td>0111: 0.50 kHz</td> <td>1111: 450 ticks</td> </tr> </table> | SENT data rate | SENT message length | 0000: Not allowed | 1000: 225 ticks | 0001: 4.00 kHz | 1001: 239 ticks | 0010: 2.66 kHz | 1010: 250 ticks | 0011: 2.00 kHz | 1011: 269 ticks | 0100: 1.60 kHz | 1100: 294 ticks | 0101: 1.00 kHz | 1101: 366 ticks | 0110: 0.80 kHz | 1110: 375 ticks | 0111: 0.50 kHz | 1111: 450 ticks |
| SENT data rate | SENT message length | | | | | | | | | | | | | | | | | | | |
| 0000: Not allowed | 1000: 225 ticks | | | | | | | | | | | | | | | | | | | |
| 0001: 4.00 kHz | 1001: 239 ticks | | | | | | | | | | | | | | | | | | | |
| 0010: 2.66 kHz | 1010: 250 ticks | | | | | | | | | | | | | | | | | | | |
| 0011: 2.00 kHz | 1011: 269 ticks | | | | | | | | | | | | | | | | | | | |
| 0100: 1.60 kHz | 1100: 294 ticks | | | | | | | | | | | | | | | | | | | |
| 0101: 1.00 kHz | 1101: 366 ticks | | | | | | | | | | | | | | | | | | | |
| 0110: 0.80 kHz | 1110: 375 ticks | | | | | | | | | | | | | | | | | | | |
| 0111: 0.50 kHz | 1111: 450 ticks | | | | | | | | | | | | | | | | | | | |

Table 3–6: SETUP_OUTPUT for HAL 3930-2300

| Bit No. | Function | Description |
|--|-----------------|---|
| 15 | primary_output | Primary output protocol selection (OUT1 - pin 4): 0: PWM 1: SENT |
| 14 | primary_out_pin | Defines which output pin is used for the primary output 0: OUT1 (pin 4) - with slew rate control 1: OUT2 (pin 5) - no slew rate control |
| PWM Output (SETUP_OUTPUT[15] = 0) | | |
| 13:10 | pwm_slew_rate | PWM slew rates (OUT1 - pin 4 only): 0xxx: slew rate control disabled 1000: Fall = 5 V/0.5µs, Rise = 5 V/0.5µs 1001: Fall = 5 V/0.5µs, Rise = 5 V/1.3µs 1010: Fall = 5 V/0.7µs, Rise = 5 V/0.7µs 1011: Fall = 5 V/0.7µs, Rise = 5 V/2.6µs 1100: Fall = 5 V/1.3µs, Rise = 5 V/1.3µs 1101: Fall = 5 V/1.3µs, Rise = 5 V/5.2µs 1110: Fall = 5 V/2.6µs, Rise = 5 V/2.6µs 1111: Fall = 5 V/2.6µs, Rise = 5 V/10.4 µs Measured from 1.1V to/from 3.8 V with C _{LOUT} = 1 nF |

Table 3–6: SETUP_OUTPUT for HAL 3930-2300, continued

| Bit No. | Function | Description | |
|---|----------------|--|---|
| 9:8 | - | Must be set to 0. | |
| 7 | pwm_open_drain | This bit defines if OUTx is used as push-pull or open-drain output. 0: Push-pull 1: Open-drain (protection diode to VSUP still connected) | |
| 6 | pwm_uvov_diag | Output behavior for undervoltage/overvoltage detection 0: Will be signaled as selected for all other diagnosis bits 1: Will be signaled with 2 % duty-cycle | |
| 5 | pwm_inverted | PWM inverted: 0: Disabled 1: Enabled | |
| 4 | - | Reserved | |
| 3:0 | pwm_frequency | Min. PWM frequency 0000: 2.0 kHz 0001: 1.5 kHz 0010: 1.0 kHz 0011: 800 Hz 0100: 550 Hz 0101: 500 Hz 0110: 250 Hz 0111: 200 Hz 1000: 150 Hz 1001: 125 Hz 1010: 100 Hz 1011 to 1111: Not allowed Typical values are 3% higher. | |
| SENT Output (SETUP_OUTPUT[15] = 1) | | | |
| 13:10 | sent_slew_rate | SENT slew rates (OUT1 - pin 4 only): 0xxx: slew rate control disabled 1000: Fall = 5 V/0.5µs, Rise = 5 V/0.5µs 1001: Fall = 5 V/0.5µs, Rise = 5 V/1.3µs 1010: Fall = 5 V/0.7µs, Rise = 5 V/0.7µs 1011: Fall = 5 V/0.7µs, Rise = 5 V/2.6µs 1100: Fall = 5 V/1.3µs, Rise = 5 V/1.3µs 1101: Fall = 5 V/1.3µs, Rise = 5 V/5.2µs 1110: Fall = 5 V/2.6µs, Rise = 5 V/2.6µs 1111: Fall = 5 V/2.6µs, Rise = 5 V/10.4 µs Measured from 1.1V to/from 3.8 V with C _{LOUT} = 1 nF | |
| 9:8 | sec_out | Secondary output selection (2 nd fast channel SENT): 0: Reserved 1: Transmission of second angle (SENT format H.1 - Table 3–9 on page 36) 2: Transmission of magnetic amplitude (SENT format H.1 - Table 3–9 on page 36) 3: Transmission of chip temperature (SENT format H.1 - Table 3–9 on page 36) | |
| 7:4 | sent_tt | SENT tick time selection (typ. value) 0000: 0.50 µs 0001: 1.00 µs 0010: 1.50 µs 0011: 2.00 µs 0100: 2.50 µs 0101: 2.75 µs 0110: 3.00 µs 0111: 6.00 µs 1000: 12.0 µs Note: Not all combinations of tick time and repetition rate are possible. | |
| 3:0 | sent_fr | SENT data rate 0000: Not allowed 0001: 4.00 kHz 0010: 2.66 kHz 0011: 2.00 kHz 0100: 1.60 kHz 0101: 1.00 kHz 0110: 0.80 kHz 0111: 0.50 kHz | SENT message length 1000: 225 ticks 1001: 239 ticks 1010: 250 ticks 1011: 269 ticks 1100: 294 ticks 1101: 366 ticks 1110: 375 ticks 1111: 450 ticks |

3.4. SENT Output Protocol

HAL 3930 complies with the SAEJ2716 standard rev. 4 and supports the following three frame formats:

- H.1 Format: Two 12-bit fast channels
 - A.1 Dual Throttle Position Sensors: 3 nibble position information and 3 nibble negated position information (1-position)
 - A.7 Position Sensors: 3 nibble position information and 3 nibble second position information or temperature information or magnetic-field amplitude
- H.2 Format: One 12-bit fast channel (3 nibble position information)
- H.4 Format: Secure Single Sensors with 12-bit fast channel (3 nibble position information) and 12-bit secure sensor information

All frame formats are customer selectable via bits (Table 3–7 on page 33).

Beside the supported frame formats, many of other SENT interface parameters can be configured by the customer, like tick time, pause pulse, start-up behavior, transmission of error codes, serial message channel content, etc. All configurable parameters are defined in Table 3–5, Table 3–6 and Table 3–7, Table 3–8.

In SENT output mode, the unidirectional communication from the sensor to a receiver module (e.g. an Electronic Control Unit) occurs independently of any action of the receiver module. It does not require any synchronization signal from the receiver module and does not include a coordination signal from the controller/receiving devices.

Table 3–7: SETUP_PROTOCOL for HAL 3930-0000

| Bit No. | Function | Description |
|---------|-----------|--|
| 15:14 | sent_fchf | SENT fast channel data format: 00: H.2 format: 12-bit fast channel (3 nibble position information) 01: H.4 format: Secure Single Sensors 10: H.1 format: A.1 Format for Dual Throttle Position Sensors 11: H.1 format: A.7 Format with 3 nibble position information and secondary channel |
| 13:12 | sent_lowt | SENT low time: 00: 3 ticks 01: Not allowed 10: 5 ticks 11: 6 ticks |
| 11 | sent_crc | 0: CRC according to SAE J2716 > rev. 2 (2010) 1: CRC according to SAE J2716 rev. 1 (2008 - legacy CRC) |
| 10 | sent_scrc | Include STATUS nibble in CRC 0: Disabled (According to SENT SAE J2716) 1: Enabled |

Table 3–7: SETUP_PROTOCOL for HAL 3930-0000, continued

| Bit No. | Function | Description |
|---------|-----------|---|
| 9 | sent_sub | Definition of start-up behavior: 0: Transmission of 4094 during start-up 1: Transmission of 0 during start-up (recommended by SENT SAE J2716) |
| 8 | - | Reserved |
| 7:6 | sent_err | Definition of error status bits (see Section 3.4.4. on page 40): 00: Always zero 01: Not allowed 10: Not allowed 11: According to SAE J2716 |
| 5 | sent_ferr | Definition of fast channel error codes 0: Disabled 1: Enabled |
| 4 | sent_schf | Slow serial channel format: 0: No serial message channel 1: 12-bit enhanced serial message format |
| 3:1 | sent_schc | Selection of which blocks have to be send in addition to block 1 in the slow channel: xx1: Block 2 x1x: Block 3 1xx: Block 4 + 5 |
| 0 | sent_sdf | SENT SDF mode: 0: Send diagnosis info in front of every block 1: Send diagnosis info in front of every ID |

Table 3–8: SETUP_PROTOCOL for HAL 3930-2300

| Bit No. | Function | Description |
|---------|-----------|--|
| 15:14 | sent_fchf | SENT fast channel data format: 00: H.2 format: 12-bit fast channel (3 nibble position information) 01: H.4 format: Secure Single Sensors 10: H.1 format: A.1 Format for Dual Throttle Position Sensors 11: H.1 format: A.7 Format with 3 nibble position information and secondary channel |
| 13:12 | sent_lowt | SENT low time: 00: 3 ticks 01: Not allowed 10: 5 ticks 11: 6 ticks |

Table 3–8: SETUP_PROTOCOL for HAL 3930-2300

| Bit No. | Function | Description |
|---------|---------------|--|
| 11 | sent_crc | 0: CRC according to SAE J2716 > rev. 2 (2010) 1: CRC according to SAE J2716 rev. 1 (2008 - legacy CRC) |
| 10 | sent_scrc | Include STATUS nibble in CRC 0: Disabled (According to SENT SAE J2716) 1: Enabled |
| 9 | sent_sub | Definition of start-up behavior: 0: Transmission of 4094 during start-up 1: Transmission of 0 during start-up (recommended by SENT SAE J2716) |
| 8 | sent_pp | Pause pulse activation 0: Disabled (SENT continuous) 1: Enabled (SENT with pause pulse) |
| 7 | sent_mag_loss | Defines the behavior of the SENT output in case of magnet loss: 0: Fast channel value 4091 or 4095 depending on sent_fchf 1: Fast channel value = MAG_LOSS_OUTPUT register value (fast channel status bits not set and no error on slow channel) |
| 6 | sent_err | Definition of error status bits (see Section 3.4.4. on page 40): 0: Always zero 1: According to SAE J2716 |
| 5 | sent_ferr | Definition of fast channel error codes 0: Disabled 1: Enabled |
| 4 | sent_schf | Slow serial channel format: 0: No serial message channel 1: 12-bit enhanced serial message format |
| 3:1 | sent_schc | Selection of which blocks have to be send in addition to block 1 in the slow channel: xx1: Block 2 x1x: Block 3 1xx: Block 4 + 5 |
| 0 | sent_sdf | SENT SDF mode: 0: Send diagnosis info in front of every block 1: Send diagnosis info in front of every ID |

3.4.1. H.1 Format: 6 Data Nibble Frame with Two Fast Channels

In this SENT mode the sensor transmits SENT frames with 6 data nibbles.

Two different application specific protocols are supported:

- A.1 Dual Throttle Position Sensors
- A.7 Position Sensors

In case of A.1 the first 3 data nibbles contain a 12-bit position information and the second 3 data nibbles contain the negated position of the first 3 nibbles (1-position).

Clamping of the output signal is done by the selected CLAMP_LOW and CLAMP_HIGH register values.

In case of A.7 the first 3 data nibbles contain a 12-bit position information and the second 3 data nibbles contain a 12-bit temperature information, 12-bit magnetic-field amplitude information or a second angle (customer configurable: Table 3–5 or Table 3–6). They are formatted according to Table 3–10.

Table 3–9: Nibble description for H.1 A.1 format

| Pulse | | Remarks |
|-------|-------------------------------------|--|
| # | Description | |
| 1 | Synchronization/ Calibration | It is mandatory to measure the synchronization / calibration period for calibration of the clock tick time t_{tick} at the ECU |
| 2 | 4-bit Status & Communication Nibble | Status [0...1]: According to selection in Table 3–7 bits[7:6] or Table 3–8 bit[6] Status [2...3]: According to selection in Table 3–7 or Table 3–8 bit[4] |
| 3 | 4-bit Data Nibble MSN 1 | Position Value [11:8] |
| 4 | 4-bit Data Nibble MidN 1 | Position Value [7:4] |
| 5 | 4-bit Data Nibble LSN 1 | Position Value [3:0] |
| 6 | 4-bit Data Nibble LSN 2 | Negated Position Value [3:0] |
| 7 | 4-bit Data Nibble MidN 2 | Negated Position Value [7:4] |
| 8 | 4-bit Data Nibble MSN 2 | Negated Position Value [11:8] |
| 9 | 4-bit CRC Nibble | According to selection in Table 3–7 or Table 3–8 bit[11] |
| 10 | Pause Pulse | According to selection in Table 3–5 bit[7] or Table 3–8 bit[8] |

Table 3–10: Nibble description for H.1 A.7 format

| Pulse | | Remarks |
|-------|--|--|
| # | Description | |
| 1 | Synchronization/ Calibration | It is mandatory to measure the synchronization / calibration period for calibration of the clock tick time t_{tick} at the ECU |
| 2 | 4-bit Status & Communication Nibble | Status [0...1]: According to selection in Table 3–7 bits[7:6] or Table 3–8 bit[6] Status [2...3]: According to selection in Table 3–7 or Table 3–8 bit[4] |
| 3 | 4-bit Data Nibble MSN 1 | Position Value [11:8] |
| 4 | 4-bit Data Nibble MidN 1 | Position Value [7:4] |
| 5 | 4-bit Data Nibble LSN 1 | Position Value [3:0] |
| 6 | 4-bit Data Nibble LSN 2 | Value [3:0]: According to selection in Table 3–5 or Table 3–6 bits[9:8] |
| 7 | 4-bit Data Nibble MidN 2 | Value [7:4]: According to selection in Table 3–5 or Table 3–6 bits[9:8] |
| 8 | 4-bit Data Nibble MSN 2 | Value [11:8]: According to selection in Table 3–5 or Table 3–6 bits[9:8] |
| 9 | 4-bit CRC Nibble | According to selection in Table 3–7 or Table 3–8 bit[11] |
| 10 | Pause Pulse | According to selection in Table 3–5 bit[7] or Table 3–8 bit[8] |

3.4.2. H.2 Format: 3 Data Nibble Frame with One Fast Channel

Following application specific protocol is supported:

- A.7 Position Sensors

In this mode the sensor transmits SENT frames with 3 data nibbles containing 12-bit position information. They are formatted according to Table 3–11.

Table 3–11: Nibble description for 3 data nibble frame format with one fast channel

| Pulse | | Remarks |
|-------|--|--|
| # | Description | |
| 1 | Synchronization/ Calibration | It is mandatory to measure the synchronization / calibration period for calibration of the clock tick time t_{tick} at the ECU |
| 2 | 4-bit Status & Communication Nibble | Status [0...1]: According to selection in Table 3–7 bits[7:6] or Table 3–8 bit[6] Status [2...3]: According to selection in Table 3–7 or Table 3–8 bit[4] |
| 3 | 4-bit Data Nibble MSN 1 | Position Value [11:8] |
| 4 | 4-bit Data Nibble MidN 1 | Position Value [7:4] |
| 5 | 4-bit Data Nibble LSN 1 | Position Value [3:0] |
| 6 | 4-bit CRC Nibble | According to selection in Table 3–7 or Table 3–8 bit[11] |
| 7 | Pause Pulse | According to selection in Table 3–5 bit[7] or Table 3–8 bit[8] |

3.4.3. H.4 Format: Secure Single Sensors with 12-bit Fast Channel

The following application specific protocol is supported:

- A.7 Position Sensors

In this SENT mode, the sensor transmits SENT frames with 3 data nibbles containing 12-bit position information as well as 3 data nibbles containing 12-bit secure sensor information. The secure sensor information consists of an 8-bit rolling counter and the inverted copy of the MSN of the transmitted position information. They are formatted according to Table 3–12.

Table 3–12: Nibble description for 6 data nibble frame format with secure information

| Pulse | | Remarks |
|-------|--|--|
| # | Description | |
| 1 | Synchronization/ Calibration | It is mandatory to measure the synchronization / calibration period for calibration of the clock tick time t_{tick} at the ECU |
| 2 | 4-bit Status & Communication Nibble | Status [0...1]: According to selection in Table 3–7 bits[7:6] or Table 3–8 bit[6] Status [2...3]: According to selection in Table 3–7 or Table 3–8 bit[4] |
| 3 | 4-bit Data Nibble MSN 1 | Position Value [11:8] |
| 4 | 4-bit Data Nibble MidN 1 | Position Value [7:4] |
| 5 | 4-bit Data Nibble LSN 1 | Position Value [3:0] |
| 6 | 4-bit Data Nibble MSN 2 | Rolling Counter MSN |
| 7 | 4-bit Data Nibble MidN 2 | Rolling Counter LSN |
| 8 | 4-bit Data Nibble LSN 2 | Inverted Copy of Data Nibble MSN 1 |
| 9 | 4-bit CRC Nibble | According to selection in Table 3–7 or Table 3–8 bit[11] |
| 10 | Pause Pulse | According to selection in Table 3–5 bit[7] or Table 3–8 bit[8] |

3.4.4. Error Diagnostic Reporting on Fast Channel and Status Bits

The error diagnostic reporting is customer configurable. For HAL 3930-0000 by setting the bits[7:6] and for HAL 3930-2300 with bit [6] in the SETUP_PROTOCOL register (see Table 3–7 on page 33 or Table 3–8 on page 34) different error handling can be activated:

- Always zero: Status bits are always set to zero independent from an error
- Error indication according to SAE J2716 rev. 4: The Status bits are set to one in case of “sensor error indication” or “sensor functionality and processing error indication”

In addition the diagnostic can be reported through the 12-bit payload of channel 1 and/or channel 2. Below table shows the values that will be send in case of an internal error.

Table 3–13: Error codes transmitted on fast channel 1 and/or 2

| Error | Code | | A.1 Mode | |
|--|------|------|----------|------|
| | CH 1 | CH 2 | CH1 | CH2 |
| A.1 error code ²⁾ | – | – | 4095 | 4095 |
| Sensor error indication ²⁾ | 4091 | 4091 | N/A | N/A |
| Sensor functionality and processing error indication | 4090 | 4090 | – | – |
| Data Clamping: High | 1) | 1) | 1) | 1) |
| Data Clamping: Low | 1) | 1) | 1) | 1) |
| ¹⁾ The output will clamp according to the settings for CLAMP_HIGH and CLAMP_LOW. ²⁾ HAL 3930-2300: In case that sent_mag_loss in the SETUP_PROTOCOL register is set to 0. | | | | |

A description with the mapping of internal errors with “Sensor error indication” and “Sensor functionality and processing error indication” can be found in Table 3–18 on page 44.

The transmission of error codes on fast channel 1 and/or 2 can be deactivated by a customer EEPROM bit (HAL 3930-0000: bit[5] of SETUP_PROTOCOL, Table 3–7 on page 33 and HAL 3930-2300: bit[5] of SETUP_PROTOCOL, Table 3–8 on page 34). The sensor will then continue to transmit measurement data. Status error bits will be transmitted according to bits [7:6] (HAL 3930-0000) and bit[6] (HAL 3930-2300) in the SETUP_PROTOCOL register.

3.4.5. Pause Pulse

HAL 3930 offers two options for the pause pulse. It can be enabled or disabled. In case that the pause pulse is enabled it is present at the end of every frame as defined by the SAE J2716 standard (PPC). There is no pause pulse in case it is disabled by the customer (NPP). In that case the falling edge after the CRC nibble is identical with the leading edge at the beginning of the next frame.

- **PPC:** The length of the pause pulse is automatically adjusted in order to achieve a constant frame length independent from the message content. The overall length can be defined by the sent_fr bits (SETUP_OUTPUT bits [3:0]). Two different types of PPC are supported. For the first type the overall frame length is defined in fixed multiples of the tick time and for the second type the frame length is adapted to the selected sample rate (see Table 3–5 on page 30 & Table 3–6 on page 31 bits [3:0]).

Table 3–14: Message length for ticks PPC (ticks related)

| SETUP_OUTPUT [3:0] | 1000 | 1001 | 1010 | 1011 | 1100 | 1101 | 1110 | 1111 |
|--------------------|------|------|------|------|------|------|------|------|
| ticks PPC | 225 | 239 | 250 | 269 | 294 | 366 | 375 | 450 |

Following PPC message length are supported for the various frame formats:

Table 3–15: Recommended PPC message length

| ticks PPC | H.1 A.1 Format: 6 Data Nibble Frame | H.1 A.7 Format: 6 Data Nibble Frame | H.2 A.7 Format: 3 Data Nibble Frame | H.4 A.7: Secure Single Sensor |
|-----------|---|---|---|-------------------------------------|
| | PP Length [ticks] | PP Length [ticks] | PP Length [ticks] | PP Length [ticks] |
| 225 | – | – | 36 | – |
| 239 | – | – | 50 | – |
| 250 | – | – | 61 | – |
| 269 | 44 | – | 80 | – |
| 294 | 69 | 24 | 105 | 39 |
| 366 | 141 | 96 | 177 | 111 |
| 375 | 150 | 105 | 186 | 120 |
| 450 | 225 | 180 | 261 | 195 |

Table 3–16: Message repetition rate for PPC (sampling aligned)

| SETUP_OUTPUT [3:0] | 0000 | 0001 | 0010 | 0011 | 0100 | 0101 | 0110 | 0111 |
|---------------------|------|------|------|------|------|------|------|------|
| Frequency PPC [kHz] | – | 4.00 | 2.66 | 2.00 | 1.60 | 1.00 | 0.80 | 0.50 |

– **NPP:** In case of deactivated pause pulse (npp) it is possible that some samples may be transmitted twice in series due to the fact that the message time can be shorter than the sample time. Status bit 0 will then be set to one in case that a sample is transmitted twice.

3.4.6. CRC Implementation

HAL 3930 supports the recommended CRC implementation defined in SAEJ2716 rev. 4. The legacy CRC can also be activated by bit[11] in the SETUP_PROTOCOL register (see Table 3–7 on page 33 & Table 3–8 on page 34). It is possible to include the status nibble in the CRC calculation. This function can be activated by bit[10] in the SETUP_PROTOCOL register as well.

3.4.7. Slow Channel: Enhanced Serial Message

HAL 3930 supports a slow channel according to the enhanced serial message with 12-bit data and 8-bit message ID. It is possible to deactivate the slow channel by changing bit[4] in the SETUP_PROTOCOL register.

3.4.8. Slow Channel: Serial Message Sequence

The device can transmit the serial message sequence shown in Table 3–17. The content/length of the serial message can be tailored by configuration bits in the SETUP_PROTOCOL register (see Table 3–7 on page 33 & Table 3–8 on page 34). It is possible to activate up to five blocks. Block 1 will always be transmitted if the serial message channel is activated.

Table 3–17: Serial message sequence

| Block | # | 8-bit ID | Item | 12-bit Data | Comment |
|-------|----|----------|-------------------|-----------------------------|---|
| 1 | 1 | 0x01 | Error Codes | (see Table 3–18 on page 44) | |
| | 2 | 0x03 | Sensor type | | Bits 0...11 in CUSTOMER_ID0 register (12 bit) Examples: 0x050 = not specified position sensor 0x055 = position & secure channel 0x060 = angle sensor 0x064 = angle sensor + secure channel, etc. |
| | 3 | 0x05 | Manufacturer Code | 0x007 | TDK Manufacturer Code |
| | 4 | 0x06 | Protocol Revision | 0x004 | SAE J2716 rev. 4 |
| | 5 | 0x23 | Temperature | 1 to 4088 temperature data | Temperature information according to SAE J2716 |
| 2 | 6 | 0x01 | Error Codes | (see Table 3–18 on page 44) | |
| | 7 | 0x29 | TDK-Micronas SN | 8-bit MSB MIC_ID1 | Right aligned |
| | 8 | 0x2A | TDK-Micronas SN | 8-bit LSB MIC_ID1 | Right aligned |
| | 9 | 0x2B | TDK-Micronas SN | 8-bit MSB MIC_ID2 | Right aligned |
| | 10 | 0x2C | TDK-Micronas SN | 8-bit LSB MIC_ID2 | Right aligned |

Table 3–17: Serial message sequence, continued

| Block | # | 8-bit ID | Item | 12-bit Data | Comment |
|-------|----|----------|---------------|--------------------------------|--|
| 3 | 11 | 0x01 | Error Codes | (see Table 3–18 on page 44) | Customer configurable |
| | 12 | 0x07 | Fast CH1 - X1 | Fast channel 1 characteristics | Bits 0...11 in CUSTOMER_ID1 register |
| | 13 | 0x08 | Fast CH1 - X2 | Fast channel 2 characteristics | Bits 12...15 in CUSTOMER_ID1 register Bits 0...7 in CUSTOMER_ID2 register |
| | 14 | 0x09 | Fast CH1 - Y1 | Fast channel 1 characteristics | Bits 8...15 in CUSTOMER_ID2 register Bits 0...3 in CUSTOMER_ID3 register |
| | 15 | 0x0A | Fast CH1 - Y2 | Fast channel 2 characteristics | Bits 4...15 in CUSTOMER_ID3 register |
| 4 | 16 | 0x01 | Error Codes | (see Table 3–18 on page 44) | |
| | 17 | 0x90 | OEM Code 1 ID | ASCII character OEM Codes | Bits 0...11 in CUSTOMER_ID4 register |
| | 18 | 0x91 | OEM Code 2 ID | ASCII character OEM Codes | Bits 12...15 in CUSTOMER_ID4 register Bits 0...7 in CUSTOMER_ID5 register |
| | 19 | 0x92 | OEM Code 3 ID | ASCII character OEM Codes | Bits 8...15 in CUSTOMER_ID5 register Bits 0...3 in CUSTOMER_ID6 register |
| | 20 | 0x93 | OEM Code 4 ID | ASCII character OEM Codes | Bits 4...15 in CUSTOMER_ID6 register |
| 5 | 21 | 0x01 | Error Codes | (see Table 3–18 on page 44) | |
| | 22 | 0x94 | OEM Code 5 ID | ASCII character OEM Codes | Bits 0...11 in CUSTOMER_ID7 register |
| | 23 | 0x95 | OEM Code 6 ID | ASCII character OEM Codes | Bits 12...15 in CUSTOMER_ID7 register Bits 0...7 in CUSTOMER_ID8 register |
| | 24 | 0x96 | OEM Code 7 ID | ASCII character OEM Codes | Bits 8...15 in CUSTOMER_ID8 register Bits 0...3 in CUSTOMER_ID9 register |
| | 25 | 0x97 | OEM Code 8 ID | ASCII character OEM Codes | Bits 4...15 in CUSTOMER_ID9 register |

Alternatively, the Error Code can be transmitted as every second slow channel message by setting bit[0] in the SETUP_PROTOCOL register (see Table 3–7 on page 33 & Table 3–8 on page 34).

3.4.9. Slow Channel: Serial Message Error Codes

Diagnostic status codes are transmitted via the serial message. The 8-bit message ID for the diagnostic status code is 0x01. HAL 3930 features the error codes described in Table 3–18.

Table 3–18: Serial message error codes

| Bit Position | Error Type | Fast Channel Error Code |
|--------------|---|-------------------------|
| 0 | Memory self-test error or checksum error | 4090 |
| 1 | ADC error or DSP self-test error | 4090 |
| 2 | Voltage regulator error | 4090 |
| 3 | ADC clipping | 4091 |
| 4 | Invalid temperature sensor values | 4090 |
| 5 | Signal path under/ overflow | CLAMP_LOW/CLAMP_HIGH |
| 6 | Overvoltage warning | 4091 |
| 7 | Undervoltage warning | 4091 |
| 8 | Reserved | N/A |
| 9 | Hall-plate error | 4090 |
| 10 | Magnet field out of range (MAG_HI, MAG_LOW) (HAL 3930-2300: Only if sent_mag_loss bit in the SETUP_PROTOCOL register is set to 0) | 4091 |
| 11 | Always set to one | - |

3.4.10. Start-Up Behavior

The device can either transmit frames with value zero until a valid information is available (SAEJ2716 conform) or alternatively frames with 4094. The start-up behavior is customer configurable by bit[9] in the SETUP_PROTOCOL register.

3.4.11. Message Time for SENT Frames in PPC Mode

The SENT frame repetition frequency (sent_fr in SETUP_OUTPUT[3:0] register) is defined by the position sampling frequency. The selectable SENT frame repetition frequency is limited by the configured tick time, the transmitted data value and the minimum and maximum pause-pulse duration.

The tick time is customer programmable and can be selected.

Table 3–19: Available tick time ranges

| Product Type | Tick Time Range | EEPROM Register |
|---------------|----------------------------|----------------------|
| HAL 3930-0000 | 1 μ s ... 12 μ s | Table 3–5 on page 30 |
| HAL 3930-2300 | 0.5 μ s ... 12 μ s | Table 3–6 on page 31 |

The pulse low time can be configured to 3, 5, and 6 ticks.

4. Functional Safety

4.1. Functional Safety Manual and Functional Safety Report

The Functional Safety Manual for HAL 3930 contains the necessary information to support customers to realize a safety compliant application by integrating HAL 3930 as an ASIL B ready component, in their system. The Functional Safety Manual can be provided upon request.

The Functional Safety Analysis Report describes the assumed Safety Goal, the corresponding Failure Modes as well as the Base Failure Rate for die and package according to IEC TR 62380. It can be provided based on a TDK-Micronas mission profile as well as customer mission profiles.

4.2. Integrated Diagnostic Mechanism

HAL 3930 performs self-tests during start-up and normal operation. These increase the robustness of the device functionality by either preventing the sensor to provide wrong output signals or by reporting the failure according to SENT definition or diagnostic levels in case of PWM output. Further details about error reporting in case of SENT output see Section 3.4.9. on page 44.

HAL 3930-0000

For the PWM output signal the sensor is signaling errors by providing a duty-cycle of either 0.5% or 99.5%. Additionally it is possible to report under- and overvoltage events with a separate duty-cycle of 2%. The behavior is customer configurable. Further details can be found in Section 3.3.2. on page 16.

HAL 3930-2300

For the PWM output signal the sensor is signaling errors by providing a fixed duty-cycle. This duty-cycle can be defined by the registers PWM_STD_ERROR and MAG_LOSS_OUTPUT. Additionally it is possible to report under- and overvoltage events with a separate duty-cycle of 2%. The behavior is customer configurable. Further details can be found in Section 3.3.2. on page 16.

The result of the internal diagnostics is as well available via the DIAGNOSIS_X registers.

Note

Please check as well the Application Note “HAL 3900/HAL 3930 - Procedure to Avoid Temperature-Dependent Checksum Calculation Error” in case HAL 3930-0000 is used.

Table 4–1: DIAGNOSIS_0 register


| Bit no. | Description when bit is set to 1 |
|---------|--|
| 15 | DSP self-check routines (redundancy or plausibility checks) |
| 14 | DSP and μ C check of 16-bit checksum covering the EEPROM parameters |
| 13 | DSP checksum for ROM and RAM |
| 12 | Chip junction temperature out of range |
| 11 | Plausibility check of redundant temperature sensor |
| 10 | Hall-plate supply too high |
| 9 | Hardware overtemperature supervision: Junction temperature > 180°C |
| 8 | Reserved |
| 7 | At least one of the A/D converters delivers a stuck signal for Channel 1, 2 or 3 |
| 6 | Overflow or underflow of decimation filter |
| 5 | MAG_HIGH threshold has been exceeded |
| 4 | Magnetic field amplitude is below the MAG-LOW threshold |
| 3 | The result of the position calculation (high) is out of the expected (valid) range |
| 2 | The result of the position calculation (low) is out of the expected (valid) range |
| 1 | Hall-plate current out of range |
| 0 | Reserved |

Table 4–2: DIAGNOSIS_1 register

| Bit no. | Description when bit is set to 1 |
|--|---|
| 15 | Reserved |
| 14, 12 | General purpose ADC error |
| 13 | Reserved |
| 11 | Undervoltage Error. Supply voltage out of range |
| 10 | Overvoltage Error. Supply voltage out of range. |
| 9 | Internal analog voltage out of range |
| 8 | Internal digital voltage out of range |
| Note: Bits[7:0] can not be read via the programming interface as they are triggering immediately a reset of the device. | |
| 7 | μ C self-test error |
| 6 | μ C ROM OP code error |
| 5 | μ C memory OP code error |
| 4:2 | Reserved |
| 1 | Error in analog part |
| 0 | Reserved |

5. Specifications

5.1. Outline Dimensions

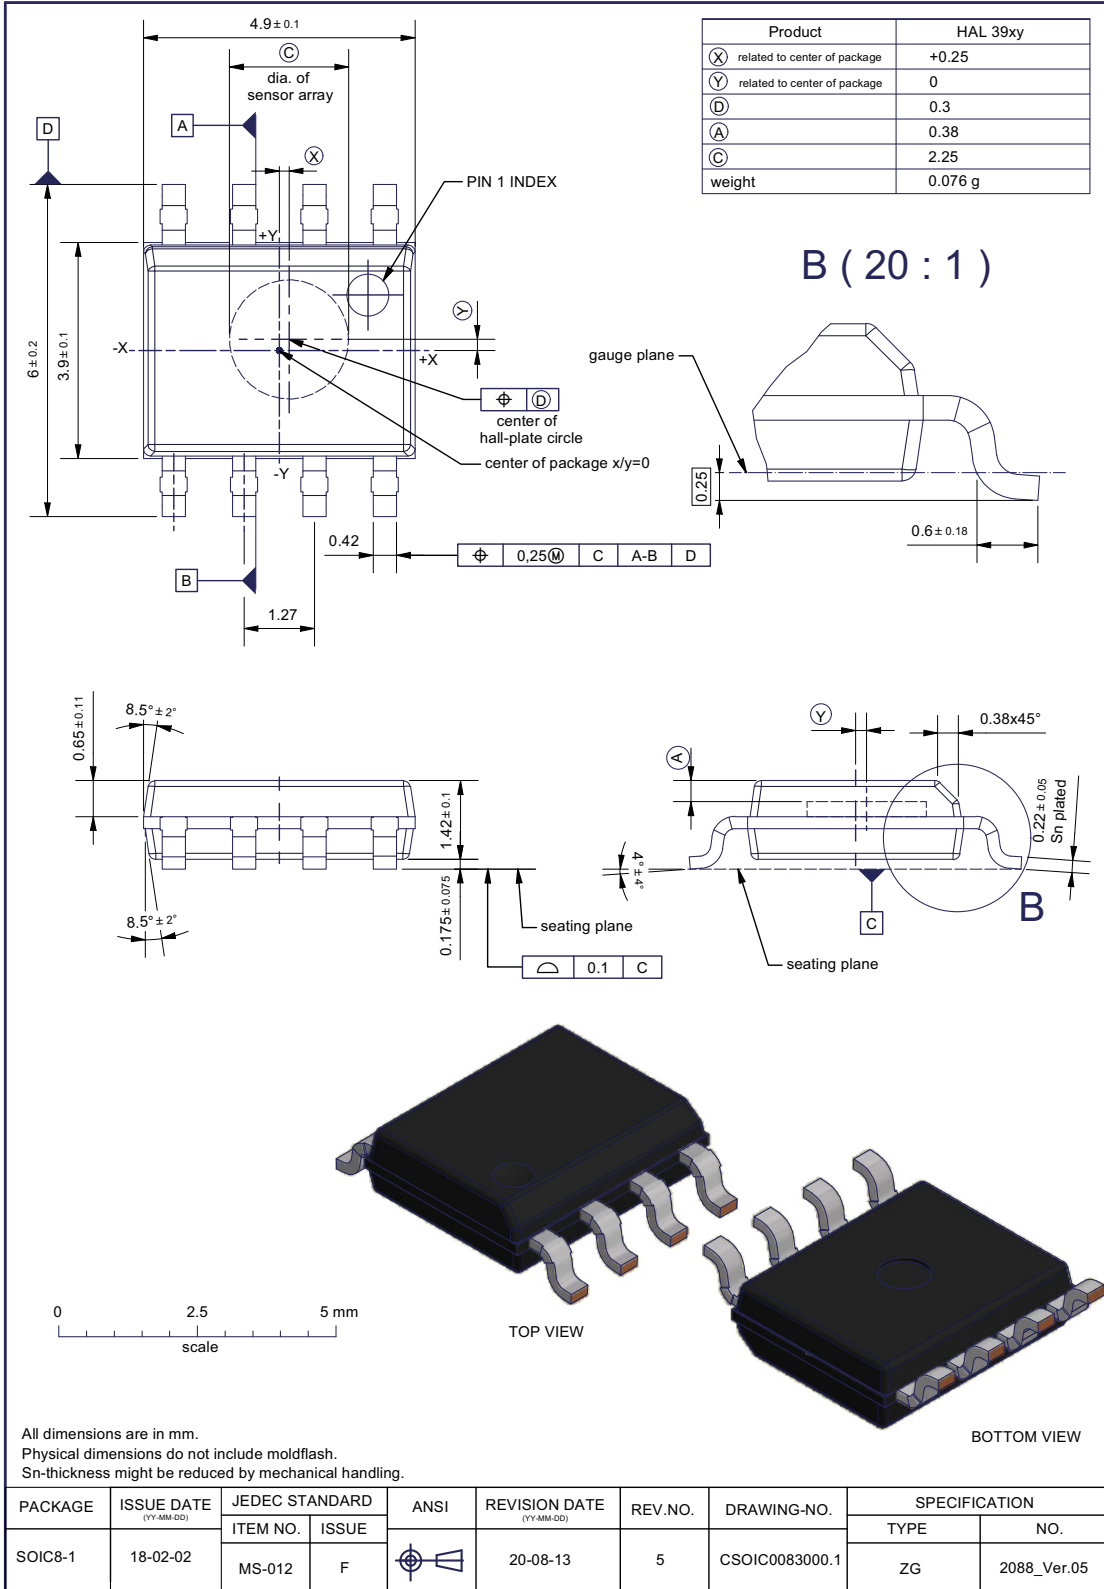

All dimensions are in mm.
Physical dimensions do not include moldflash.
Sn-thickness might be reduced by mechanical handling.

| PACKAGE | ISSUE DATE (YY-MM-DD) | JEDEC STANDARD | | ANSI | REVISION DATE (YY-MM-DD) | REV.NO. | DRAWING-NO. | SPECIFICATION | |
|---------|--------------------------|----------------|-------|------|-----------------------------|---------|----------------|---------------|-------------|
| | | ITEM NO. | ISSUE | | | | | TYPE | NO. |
| SOIC8-1 | 18-02-02 | MS-012 | F | | 20-08-13 | 5 | CSOIC0083000.1 | ZG | 2088_Ver.05 |

© Copyright 2018 TDK-Micronas GmbH, all rights reserved

Fig. 5-1:
SOIC8-1: Plastic Small Outline IC package, 8 leads, gullwing bent, 150 mil
Ordering code: DJ

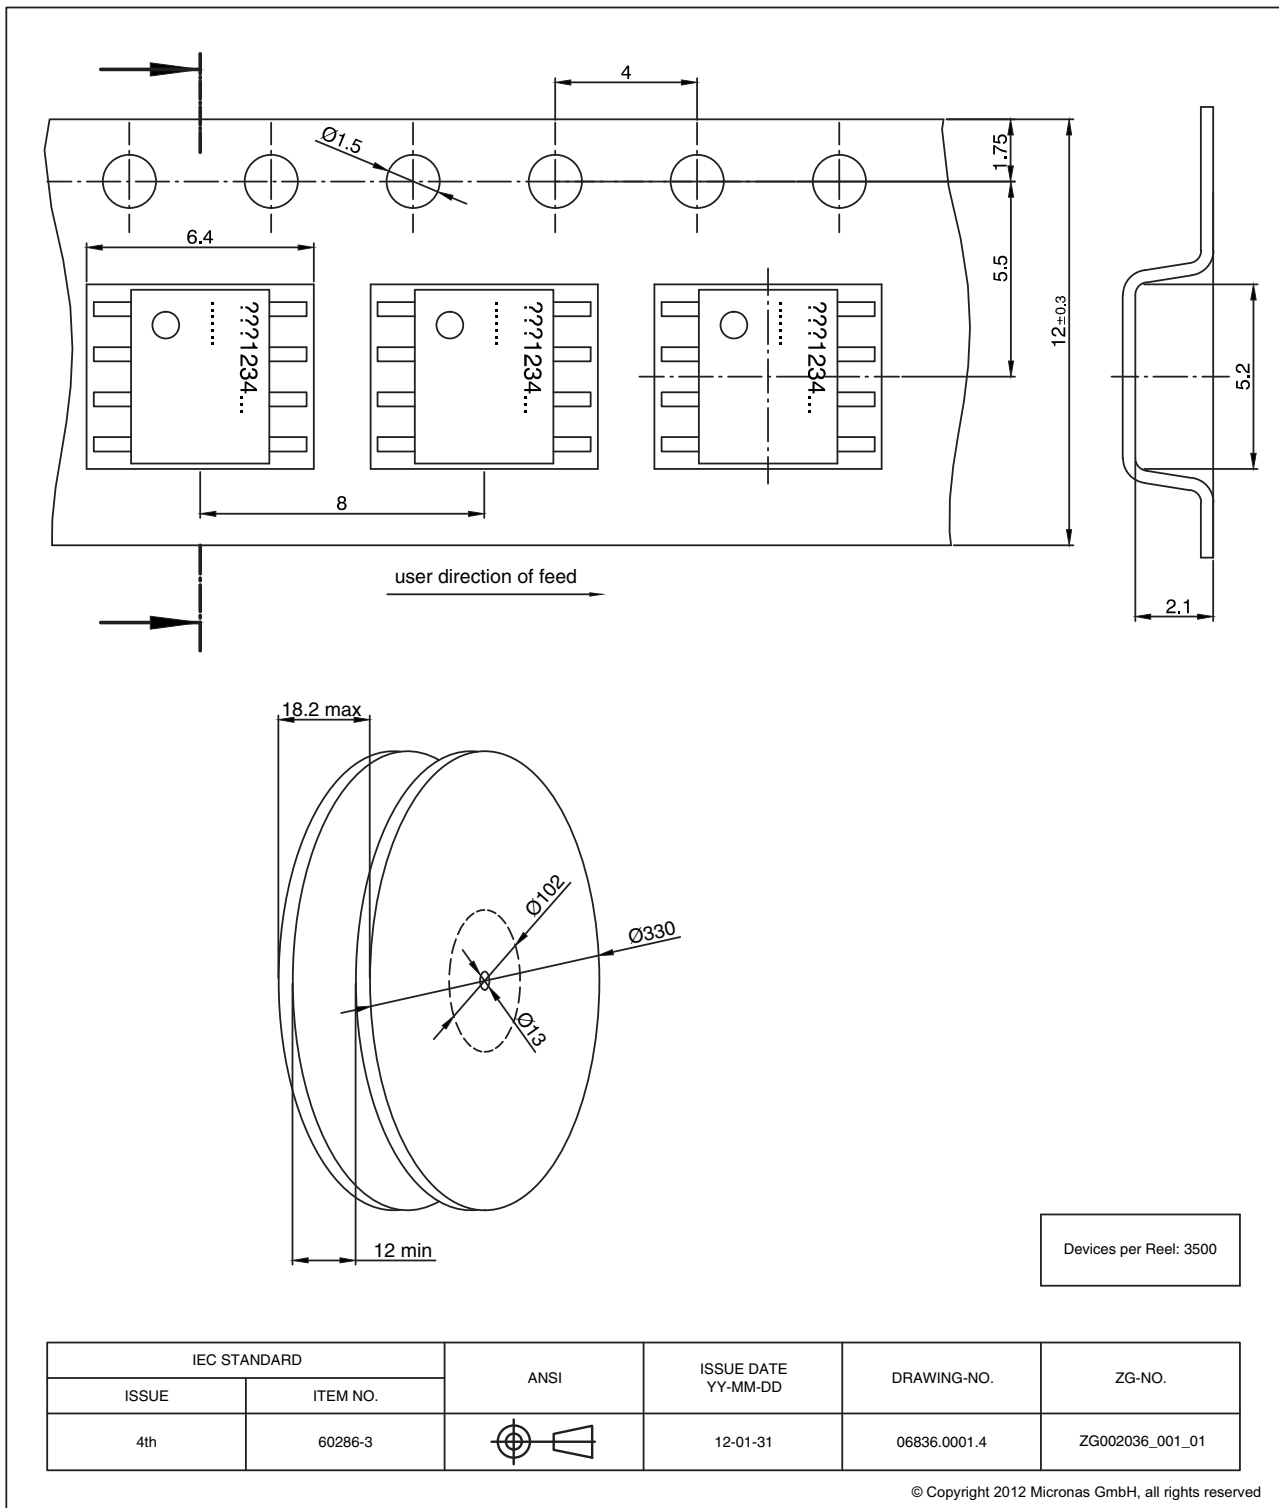


Fig. 5-2:
SOIC8-1: Dimensions Tape & Reel

5.2. Soldering, Welding, Assembly

Information related to solderability, welding, assembly, and second-level packaging is included in the document “Guidelines for the Assembly of Micronas Packages”.

- It is available on the TDK-Micronas website (<https://www.micronas.tdk.com/en/service-center/downloads>) or on the service portal (<http://service.micronas.com>).

5.3. Storage and Shelf Life Package

Information related to storage conditions of TDK-Micronas sensors is included in the document “Guidelines for the Assembly of Micronas Packages”. It gives recommendations linked to moisture sensitivity level and long-term storage.

- It is available on the TDK-Micronas website (<https://www.micronas.tdk.com/en/service-center/downloads>) or on the service portal (<http://service.micronas.com>).

5.4. Size and Position of Sensitive Areas

- Diameter of Hall plate circle: $C = 2.25\text{ mm}$

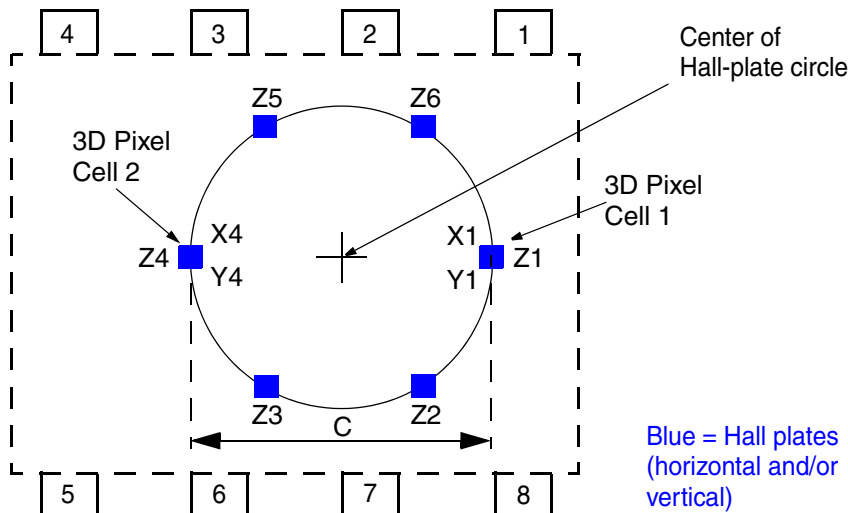


Fig. 5–3: Hall-plate configuration

5.5. Definition of Magnetic-Field Vectors

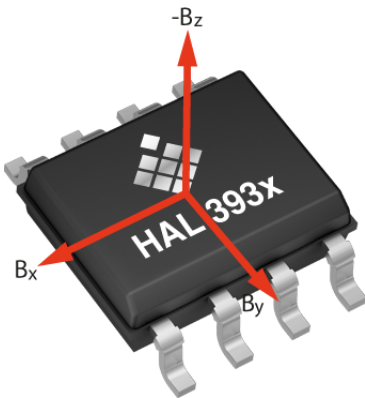


Fig. 5–4: Definition of magnetic-field vectors for HAL 3930

5.6. Pin Connections and Short Description

Table 5–1: Pin connection SOIC8

| Pin No. | Pin Name | Type | Short Description |
|----------------------|----------|------|---------------------------------|
| SOIC8 Package | | | |
| 1 | VSUP | IN | Supply voltage |
| 2 | GND | GND | Ground |
| 3 | TEST1 | IN | Test |
| 4 | OUT1 | I/O | PWM/SENT output and programming |
| 5 | OUT2 | OUT | PWM/SENT or Switch output |
| 6 | TEST2 | N/A | Test |
| 7 | TEST3 | N/A | Test |
| 8 | TEST4 | N/A | Test |

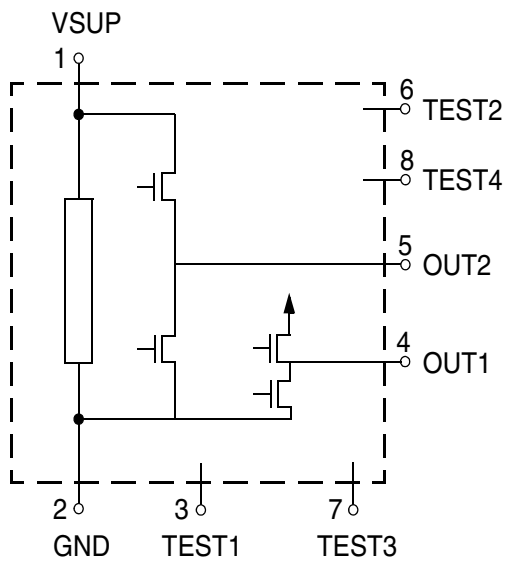


Fig. 5–5: Pin configuration for SOIC8 package

Note Pins 2 and 3 must be connected to GND. Pins 6, 7 and 8 must stay open.

5.7. Absolute Maximum Ratings

Stresses beyond those listed in the “Absolute Maximum Ratings” may cause permanent damage to the device. This is a stress rating only. Functional operation of the device at these conditions is not implied. Exposure to absolute maximum rating conditions for extended periods will affect device reliability.

This device contains circuitry to protect the inputs and outputs against damage due to high static voltages or electric fields; however, it is advised that normal precautions must be taken to avoid application of any voltage higher than absolute maximum-rated voltages to this high-impedance circuit.

All voltages listed are referenced to ground (GND).

| Symbol | Parameter | Pin Name | Min. | Max. | Unit | Condition |
|--------------------|--|----------|------|----------|------------------|---|
| V_{SUP} | Supply Voltage | VSUP | -18 | 28 37 | V V | $t < 60 \text{ s}; T_J = 25 \text{ }^\circ\text{C}$ |
| V_{OUT1} | Output Voltage Output 1 (PWM/SENT) | OUT1 | -2 | 28 | V | $t < 96 \text{ h}$ |
| $V_{OUT1}-V_{SUP}$ | Excess of Output Voltage 1 over Supply Voltage | OUT1 | - | 7 | V | $t < 96 \text{ h}$ $V_{SUP} < 5.5\text{V}$ |
| V_{OUT2} | Output Voltage Output 2 (Switch/PWM/SENT) | OUT2 | -0.3 | 28 | V | $t < 96 \text{ h}$ |
| $V_{OUT2}-V_{SUP}$ | Excess of Output Voltage 2 over Supply Voltage | OUT2 | - | 0.3 | V | $t < 96 \text{ h}$ |
| I_{OUTx} | Output Current Output1 & 2 | OUTx | -125 | 125 | mA | $t < 96 \text{ h};$ May occur at GND or V_{SUP} |
| B_{max} | Magnetic Field | - | -1 | 1 | T | |
| T_J | Junction Temperature | - | -40 | 190 | $^\circ\text{C}$ | $t < 96 \text{ h}^1)$ |
| T_A | Ambient Temperature | - | -40 | 160 | $^\circ\text{C}$ | $^2)$ |
| $T_{storage}$ | Transportation/Short Term Storage Temperature | - | -55 | 150 | $^\circ\text{C}$ | Device only without packing material |

No cumulative stress for all parameters.

¹⁾ Please contact TDK-Micronas for other temperature requirements

²⁾ Consider current consumption, mounting condition (e.g. overmold, potting) and mounting situation for T_A and in relation to T_J .

| Symbol | Parameter | Pin Name | Min. | Max. | Unit | Condition |
|---|----------------|--|------|------|------|-----------|
| V _{ESD} | ESD Protection | VSUP, OUT _x , GND, TEST _x | -2 | 2 | kV | 3) |
| | | VSUP, GND | -15 | 15 | kV | 4) 5) |
| | | OUT1 | -8 | 8 | kV | 4) |
| | | OUT2 | -4 | 4 | kV | 4) |
| <p>3) AEC-Q100-002 (100 pF and 1.5 kΩ)</p> <p>4) Unpowered gun test (150 pF/330 Ω or 330 pF/2 kΩ) according to ISO 10605-2008</p> <p>5) With additional protection on the PCB (470 nF on VSUP)</p> <p>No cumulative stress for all parameter.</p> | | | | | | |

5.8. Recommended Operating Conditions

Functional operation of the device beyond those indicated in the “Recommended Operating Conditions/Characteristics” is not implied and may result in unpredictable behavior, reduced reliability and lifetime of the device.

All voltages listed are referenced to ground (GND).

| Symbol | Parameter | Pin Name | Min. | Typ. | Max. | Unit | Condition |
|--------------------|--------------------------------------|----------|------|------|------|--------|--|
| V _{SUP} | Supply Voltage | VSUP | 3.0 | – | 18 | V | |
| V _{OUT1} | Output Voltage (PWM/SENT) | OUT1 | – | – | 5.5 | V | Push-Pull configuration |
| | | | – | – | 18 | V | Open-Drain; V _{SUP} = 18 V |
| V _{OUT2} | Output Voltage (Switch/PWM/SENT) | OUT2 | – | – | 18 | V | |
| I _{OUT} | Output Current | OUTx | –20 | – | 20 | mA | |
| R _{LOUT1} | Output Load (PWM/SENT) | OUT1 | 1 | – | – | kΩ | Pull-up or pull-down resistor Optional. Programming not possible with pull-down. |
| | | OUT1 | 10 | – | 55 | kΩ | SENT output Pull-up or pull-down resistor optional |
| R _{LOUT2} | Pull-up/-Down Resistor (Switch) | OUT2 | 0.5 | – | – | kΩ | Pull-up or pull-down resistor Optional |
| C _{LOUT} | Load Capacitance | OUTx | – | 1 | 10 | nF | |
| N _{PRG} | Number of Memory Programming Cycles | – | – | – | 100 | cycles | 0 °C < T _{amb} < 55 °C |
| B _{AMP} | Recommended Magnetic-Field Amplitude | – | ±10 | – | ±130 | mT | Max. value for setup 4b is ±65 mT |
| T _J | Junction Temperature ¹⁾ | | –40 | – | 170 | °C | for 1000 h |
| T _A | Ambient Temperature ²⁾ | | –40 | – | 150 | °C | for V _{SUP} ≤ 5.5 V ³⁾ |

¹⁾ Depends on the temperature profile of the application. Please contact TDK-Micronas for life time calculations.
²⁾ Consider current consumption, mounting condition (e.g. overmold, potting) and mounting situation for T_A and in relation to T_J
³⁾ Supply voltages above V_{SUP} = 5.5 V may limit the max. ambient temperature range due to increased self-heating of the device

Note

It is possible to operate the sensor with magnetic fields down to ±5 mT. For magnetic fields below ±10 mT, the sensor performance will be reduced.

5.9. Characteristics

at $T_A = -40\text{ °C}$ to 150 °C , $V_{SUP} = 3.0\text{ V}$ to 18.0 V , $GND = 0\text{ V}$, after programming and locking of the sensor, at Recommended Operation Conditions if not otherwise specified in the column “Conditions”.

Typical Characteristics for $T_A = 25\text{ °C}$ and $V_{SUP} = 5\text{ V}$.

| Symbol | Parameter | Pin Name | Limit Values | | | Unit | Conditions |
|--|---|----------|--------------|-------|------|---------------|--|
| | | | Min. | Typ. | Max. | | |
| I_{SUP} | Supply Current | VSUP | – | 8 | 12 | mA | 1) |
| f_{osc} | Internal Oscillator Frequency | | – | 32 | – | MHz | |
| f_{sample} | Sampling Frequency | | – | 1.953 | – | kSps | 1) Configurable |
| | | | – | 3.906 | – | | |
| | | | – | 7.812 | – | | |
| Power-On Behavior | | | | | | | |
| V_{POR} | Power_On Reset Voltage | VSUP | 2.1 | 2.6 | 2.9 | V | |
| $V_{PORHyst}$ | Power_On Reset Voltage Hysteresis | VSUP | – | 200 | – | mV | |
| Overvoltage and Undervoltage Detection | | | | | | | |
| $S_{VSUP,UOV}$ | Step Size of Under-/Overvoltage Supervision Threshold | VSUP | 92 | 100 | 108 | mV/LSB | Under-/Overvoltage threshold is customer configurable (see page 27). 1) |
| $S_{VSUP,UOVhys}$ | Under-/Overvoltage Detection Level Hysteresis | VSUP | – | 1 | – | LSB | 1) 1 LSB typ. 100 mV |
| 1) Characterized on small sample size, not tested. | | | | | | | |
| Main Output OUT1 for SENT and PWM (Push-Pull Configuration with edge shaping) | | | | | | | |
| V_{OL1} | Output Low Voltage | OUT1 | – | 6 | 8 | %VS UP | $V_{SUP} = 5.5\text{ V}$, $R_L = \infty$ |
| V_{OH1} | Output High Voltage | OUT1 | 91 | 94 | – | %VS UP | $V_{SUP} = 5.5\text{ V}$, $R_L = \infty$ |
| $V_{OH,Clamp}$ | Output High Clamping Voltage | OUT1 | – | 5.2 | 5.4 | V | $V_{SUP} > 5.5\text{ V}$, $R_L = \infty$ |
| $V_{OL,Clamp}$ | Output Low Clamping Voltage | OUT1 | – | 0.34 | 0.44 | V | $V_{SUP} > 5.5\text{ V}$, $R_L = \infty$ |
| R_{OUT1} | Output Resistance | OUT1 | 70 | 90 | 120 | Ω | Max. 10 Ω series resistor allowed @ $V_{SUP} = 5\text{ V}$ |
| I_{Leak1} | Output Leakage Current | OUT1 | –25 | – | 25 | μA | $V_{OUT1} < 5.5\text{ V}$ |
| t_{rise_sym} | Rise Time of Output symmetrical to Fall Time (recommended for PWM) 1)2) | OUT1 | – | 0.5 | – | μs | sent_slew_rates bit = 1000 |
| | | | – | 0.7 | – | | sent_slew_rates bit = 1010 |
| | | | – | 1.3 | – | | sent_slew_rates bit = 1100 |
| | | | – | 2.6 | – | | sent_slew_rates bit = 1110 |

| Symbol | Parameter | Pin Name | Limit Values | | | Unit | Conditions |
|---|--|----------|-------------------|--------|----------|----------|---|
| | | | Min. | Typ. | Max. | | |
| t_{rise_asym} | Rise Time of Output asymmetrical to Fall Time (recommended for SENT) ¹⁾²⁾ | OUT1 | – | 1.3 | – | μs | sent_slew_rates bit = 1001 |
| | | | – | 2.6 | – | | sent_slew_rates bit = 1011 |
| | | | – | 5.2 | – | | sent_slew_rates bit = 1101 |
| | | | – | 10.4 | – | | sent_slew_rates bit = 1111 |
| t_{fall1} | Fall Time of Output ¹⁾²⁾ | OUT1 | – | 0.5 | – | μs | sent_slew_rates bit = 100x |
| | | | – | 0.7 | – | | sent_slew_rates bit = 101x |
| | | | – | 1.3 | – | | sent_slew_rates bit = 110x |
| | | | – | 2.6 | – | | sent_slew_rates bit = 111x |
| $I_{Oshort1_low}$ | Output Current for Short to GND | OUT1 | –65 | –46 | – | mA | VSUP < 5.5 V |
| | | | –75 | –64 | – | | VSUP < 18 V |
| $I_{Oshort1_high}$ | Output Current for Short to VSUP | OUT1 | – | 46 | 70 | mA | VSUP < 5.5 V |
| | | | – | 64 | 110 | | VSUP < 18 V |
| Main Output OUT1 for PWM (Open-Drain Configuration) | | | | | | | |
| R_{OUT1} | Open-Drain Output1 Resistance | OUT1 | 80 | 104 | 130 | Ω | |
| V_{OL1} | Output Low Voltage | OUT1 | 0.6 | 0.8 | 1.3 | V | $I_{Load} = 10 \text{ mA}$ |
| t_{fall1} | Fall Time of Output 1 | OUT1 | – | 0.6 | – | μs | ¹⁾ $C_{Load} = 5 \text{ nF}$ from 3.8 V to 1.1 V |
| $I_{Oshort1_high}$ | Output Current for Short to VSUP | OUT1 | – | 46 | 70 | mA | VSUP < 5.5 V |
| | | | – | 64 | 110 | | VSUP < 18 V |
| I_{Leak1} | Output 1 Leakage Current | OUT1 | –80 –80 | – – | 40 80 | μA | $V_{OUT1} < 5.5 \text{ V}$ $V_{OUT1} < 18 \text{ V}$ |
| Secondary Output OUT2 for Switch or PWM Function (Push-Pull: High-side or Low-side) | | | | | | | |
| V_{OL2} | Output Low Voltage | OUT2 | – | – | 0.6 | V | $I_{Load} = 20 \text{ mA}$ |
| V_{OH2} | Output High Voltage | OUT2 | V_{SUP} –0.6 | – | – | V | $I_{Load} = -10 \text{ mA}$ |
| t_{rise2} | Rise Time of Output | OUT2 | – | 120 | – | ns | ^{1) 2)} |
| t_{fall2} | Fall Time of Output | OUT2 | – | 120 | – | ns | ^{1) 2)} |
| $I_{Oshort2_Low}$ | Output Current for Short to GND | OUT2 | –50 | –40 | –30 | mA | $V_{SUP} > V_{OUT2} > GND$ |
| $I_{Oshort2_High}$ | Output Current for Short to VSUP | OUT2 | 25 | 40 | 50 | mA | $V_{SUP} > V_{OUT2} > GND$ |
| I_{Leak2} | Output Leakage Current2 | OUT2 | –2 | – | 2 | μA | |
| ¹⁾ Characterized on small sample size, not tested. ²⁾ Measured from 1.1 V to/from 3.8 V with $C_L = 1 \text{ nF}$. Resulting slew rates (see Table 3–5 & Table 3–6) | | | | | | | |

| Symbol | Parameter | Pin Name | Limit Values | | | Unit | Conditions |
|--|---|----------|--------------|-------|-------|---------------|--|
| | | | Min. | Typ. | Max. | | |
| SENT Output Mode | | | | | | | |
| t_{tick} | SENT Tick Time | OUTx | 0.48 | 0.50 | 0.52 | μs | 1) |
| | | | 0.97 | 1.00 | 1.03 | μs | |
| | | | 1.45 | 1.50 | 1.55 | μs | |
| | | | 1.94 | 2.00 | 2.58 | μs | |
| | | | 2.42 | 2.50 | 2.58 | μs | |
| | | | 2.66 | 2.75 | 2.84 | μs | |
| | | | 2.91 | 3.00 | 3.09 | μs | |
| | | | 5.82 | 6.00 | 6.18 | μs | |
| | | | 11.64 | 12.00 | 12.36 | μs | |
| For SENT with pause pulse (synchronous), 3 μs tick time, H.2 frame format, 2 kHz SENT repetition rate & for SENT with pause pulse (synchronous), 3 μs tick time, H.4 frame format, 2 kHz SENT repetition rate & for SENT without pause pulse (asynchronous), 3 μs tick time, H.2 Format, 2 kHz SENT repetition rate | | | | | | | |
| $t_{\text{S_Init}}$ | SENT Start-up Time | OUTx | – | – | 9.5 | ms | 1) Time until first SENT frame with init frame starts. Fig. 5–6 on page 60 |
| $t_{\text{S_first_valid}}$ | SENT Start-up Time till first valid Frame | OUTx | – | – | 10.0 | ms | 1) Time until first valid SENT frame starts. Fig. 5–6 on page 60 |
| t_{latency} | SENT average Latency | OUTx | – | 0.75 | – | ms | 1) LP-Filter off |
| t_{wcrep} | SENT Step Response Time (worst case) | OUTx | – | – | 1 | ms | 1) see Fig. 5–7 |
| $N_{\text{S_Init_Cycles}}$ | Number of SENT Init Cycles | OUTx | – | – | 1 | cycles | 1) |
| 1) Characterized on small sample size, not tested. 2) Measured from 1.1 V to/from 3.8 V with $C_L = 1 \text{ nF}$ | | | | | | | |

| Symbol | Parameter | Pin Name | Limit Values | | | Unit | Conditions |
|----------------------------|---|----------|---|------|--------|-------------------|---|
| | | | Min. | Typ. | Max. | | |
| PWM Output Mode | | | | | | | |
| f _{PWM} | PWM Output Frequency | OUTx | 100 | – | 106.2 | Hz | 1) – |
| | | | 125 | – | 132.5 | Hz | |
| | | | 150 | – | 159.3 | Hz | |
| | | | 200 | – | 212.4 | Hz | |
| | | | 250 | – | 265.5 | Hz | |
| | | | 500 | – | 530.9 | Hz | |
| | | | 550 | – | 584 | Hz | |
| | | | 800 | – | 849.5 | Hz | |
| | | | 1000 | – | 1061.9 | Hz | |
| | | | 1500 | – | 1592.8 | Hz | |
| 2000 | – | 2123.7 | Hz | | | | |
| t _{OSD} | Overall Signal Delay | OUTx | – | – | 367 | µs | 1) Overall signal delay between sensor front-end and output. Transmission time of selected PWM frequency to be added. See Fig. 5–7. f _{decel} = 8 kSps LP-Filter = off |
| t _{P_Init} | PWM Start-up Time | OUTx | – | – | 9.5 | ms | 1) Initial start-up time until output is ready. 2 kHz PWM frequency Fig. 5–6 on page 60 |
| t _{P_first_valid} | PWM Start-up Time till first Edge | OUTx | – | – | 10 | ms | 1) Time until first valid rising/falling edge. Fig. 5–6 on page 60 2 kHz PWM frequency |
| OUT _{Res} | Output Resolution | OUTx | 13 | – | – | bit | 1) PWM freq. = 100...1500 Hz |
| | | | 12 | – | – | bit | 1) PWM freq. = 2 kHz |
| PMW _{DC} | PWM Duty-Cycle Range | OUTx | 1 | – | 99 | % | 1) |
| PWM _{DCFM} | PWM Duty-Cycle in Failure Mode | OUTx | – | 0.5 | – | % | 1) Customer configurable HAL 3930-0000 (see Table 3–5 on page 30) |
| | | | – | 99.5 | – | % | |
| | | | According registers PWM_STD_ERROR & MAG_LOSS_OUTPUT | | | | |
| PWM _{DCUV} | PWM Duty-Cycle in case of Undervoltage | OUTx | – | 2.0 | – | % | 1) Customer configurable. Alternatively same as PWM _{DCFM} . HAL 3930-0000: Table 3–5 on page 30 HAL 3930-2300: Table 3–6 on page 31 For V _{SUP} > V _{POR} |
| PWM _{DCOV} | PWM Duty-Cycle in case of Overvoltage | OUTx | – | 2.0 | – | % | |
| PWM _{DCMH} | PWM Duty-Cycle in case of Magnetic Field High Detection | OUTx | – | 98.0 | – | % | 1) |
| J _{PWM} | RMS PWM Jitter | OUTx | – | – | 1 | LSB ₁₃ | 1) |

| Symbol | Parameter | Pin Name | Limit Values | | | Unit | Conditions |
|---|-------------------------------------|----------|--------------|------|------|------|---|
| | | | Min. | Typ. | Max. | | |
| SOIC8 Package | | | | | | | |
| R _{thja} | Thermal Resistance Junction to Air | – | – | – | 140 | K/W | ³⁾ Determined with a 1S0P board |
| | | – | – | – | 93 | K/W | ³⁾ Determined with a 2S2P board |
| R _{thjc} | Thermal Resistance Junction to Case | – | – | – | 33 | K/W | ³⁾ Determined with a 1S0P & 2S2P board |
| ¹⁾ Characterized on small sample size, not tested. ³⁾ Self-heating calculation see Section 6.1. on page 66 | | | | | | | |

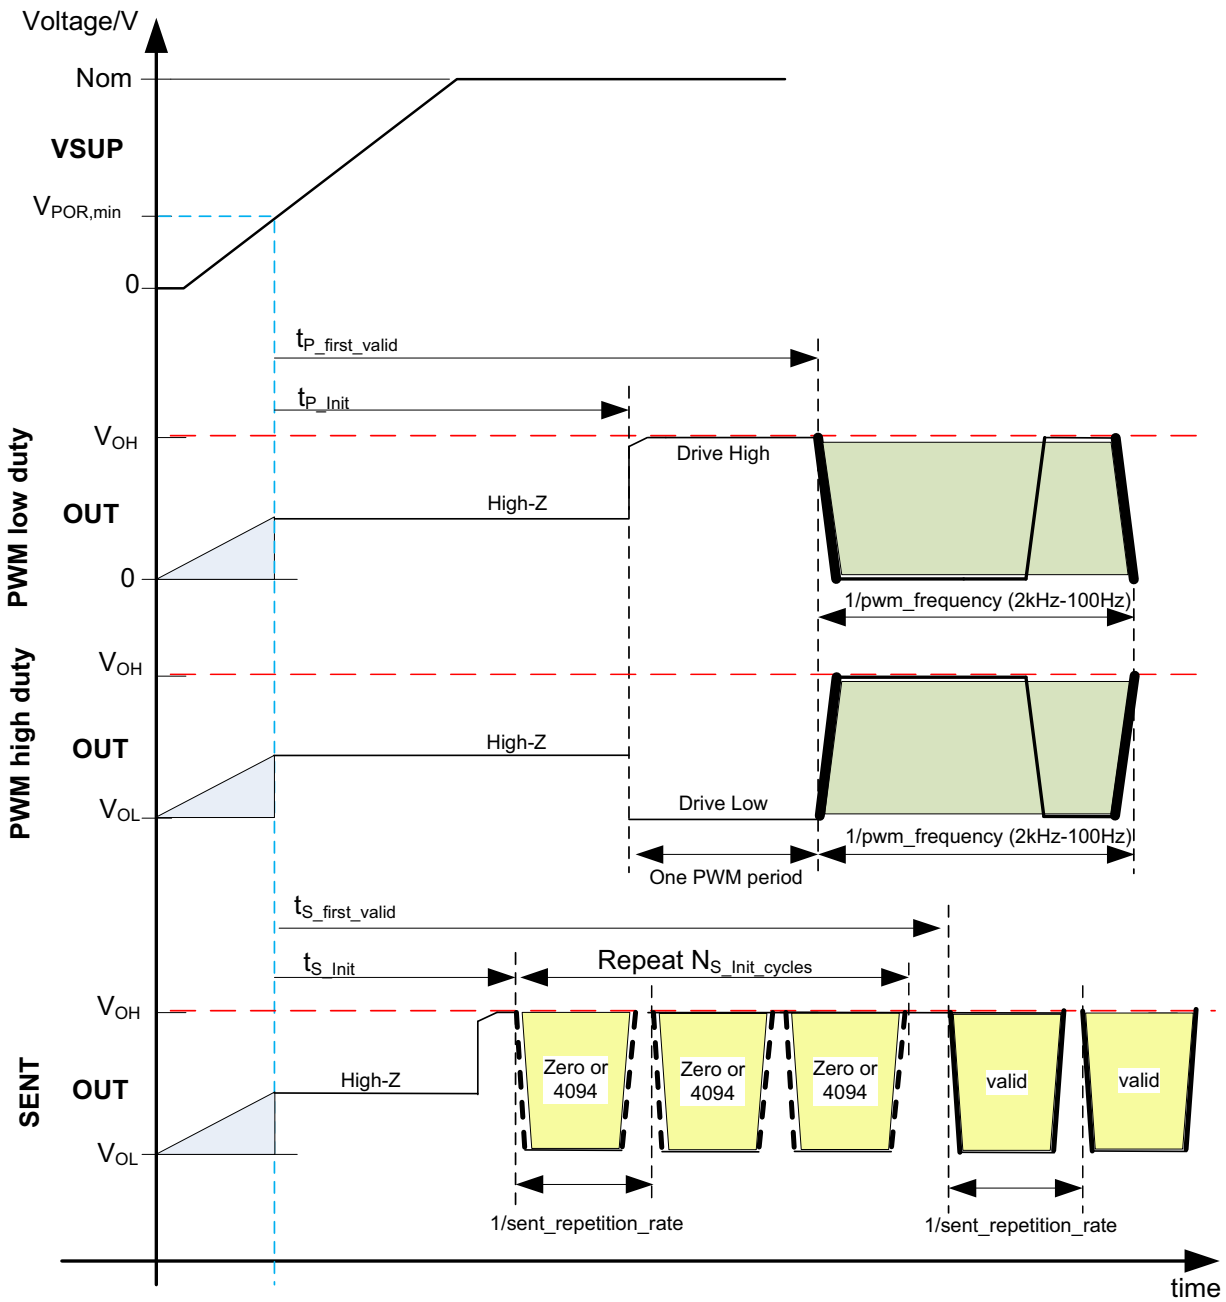


Fig. 5–6: Start-up behavior of HAL 3930 for SENT and PWM output

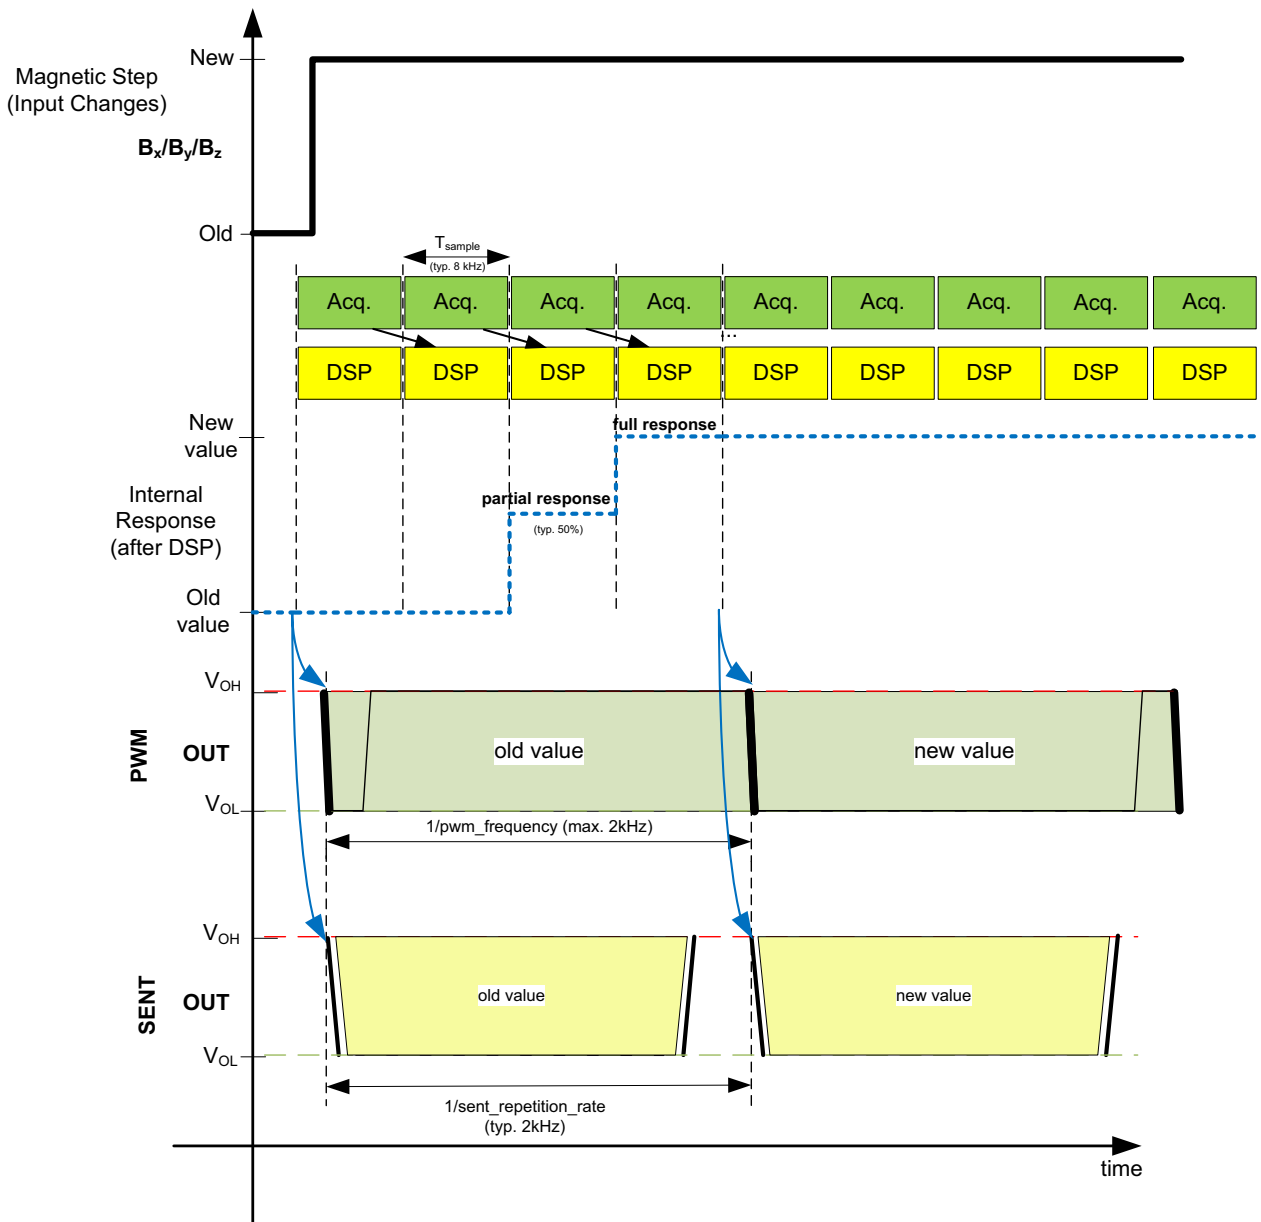


Fig. 5-7: Step response behavior of HAL 3930

5.10. Magnetic Characteristics

at $T_A = -40\text{ °C}$ to 150 °C , $V_{SUP} = 3.0\text{ V}$ to 18.0 V , $GND = 0\text{ V}$, after programming and locking of the sensor, at Recommended Operation Conditions if not otherwise specified in the column “Conditions”.

Typical Characteristics for $T_A = 25\text{ °C}$ and $V_{SUP} = 5.0\text{ V}$.

| Symbol | Parameter | Pin Name | Min. | Typ. | Max. | Unit | Conditions |
|---|--|----------|-------|------|------|-----------------------|--|
| Rotary Setup with Stray-Field Compensation (Setup 1 & 2) | | | | | | | |
| ΔE_{otot} | Total Angular Error of Drifts | OUTx | -0.85 | - | 0.85 | ° | 1) $B_{AMP} = \pm 10\text{ mT}$ Setup 2 (3 Z-Plates) |
| | | | -0.45 | - | 0.45 | ° | 1) $B_{AMP} = \pm 10\text{ mT}$ Setup 1 (6 Z-Plates) |
| ΔE_{otemp} | Angular Error Drift over Temperature | OUTx | -0.5 | - | 0.5 | ° | 1) $B_{AMP} = \pm 10\text{ mT}$ |
| ΔE_{olife} | Angular Error Drift over Lifetime | OUTx | -0.45 | - | 0.45 | ° | 1) $B_{AMP} = \pm 10\text{ mT}$ Setup 2 (3 Z-Plates) After 1008 h HTOL |
| | | | -0.2 | - | 0.2 | ° | 1) $B_{AMP} = \pm 10\text{ mT}$ Setup 1 (6 Z-Plates) After 1008 h HTOL |
| E_{ohyst} | Angular Hysteresis Error | OUTx | - | - | 0.05 | ° | 2) |
| E_{onoise_1} | Angular Noise Setup 1 | OUTx | - | 0.13 | 0.23 | ° | 3) |
| E_{onoise_2} | Angular Noise Setup 2 | OUTx | - | 0.3 | 0.67 | ° | 3) HAL 3930-0000 |
| E_{onoise_2} | Angular Noise Setup 2 | OUTx | - | 0.19 | 0.33 | ° | 3) HAL 3930-2300 |
| E_{osf_1} | Angular Error due to Stray-Field for Setup 1 | OUTx | - | - | 0.1 | ° | 1) 4) $B_{AMP} = \pm 10\text{ mT}$ wanted signal |
| E_{osf_2} | Angular Error due to Stray-Field for Setup 2 | OUTx | - | - | 0.12 | ° | 1) 4) $B_{AMP} = \pm 10\text{ mT}$ wanted signal |
| Linear Movement Setup (ΔXZ) with Stray-Field Compensation (Setup 3b) | | | | | | | |
| $SM_{\Delta XZ41}$ | Sensitivity Mismatch between ΔX_{41} and ΔZ_{41} Channel | OUTx | -5 | - | 5 | % | 1) $T_A = 25\text{ °C}$ |
| $Sense_{\Delta XZ41}$ | Sensitivity of ΔX_{41} and ΔZ_{41} Channel | OUTx | 121 | 128 | 135 | LSB ₁₅ /mT | 1) $T_A = 25\text{ °C}$ |
| $\Delta SM_{\Delta XZ41}$ | Thermal Sensitivity Mismatch Drift between ΔX_{41} and ΔZ_{41} Channel | OUTx | -2.5 | - | 2.5 | % | 1) Related to $T_A = 25\text{ °C}$ |
| $Offset_{\Delta X41}$ | Offset of ΔX_{41} Channel | OUTx | -30 | - | 30 | LSB ₁₅ | $T_A = 25\text{ °C}$ |
| $Offset_{\Delta Z41}$ | Offset of ΔZ_{41} Channel | OUTx | -15 | - | 15 | LSB ₁₅ | $T_A = 25\text{ °C}$ |
| $\Delta Offset_{\Delta X41}$ | Offset Drift of ΔX_{41} Channel | OUTx | -50 | - | 50 | LSB ₁₅ | Related to $T_A = 25\text{ °C}$ |
| $\Delta Offset_{\Delta Z41}$ | Offset Drift ΔZ_{41} Channel | OUTx | -15 | - | 15 | LSB ₁₅ | Related to $T_A = 25\text{ °C}$ |
| All values are characterized on small sample size and 3-sigma values as long as not otherwise specified (not tested) | | | | | | | |
| 1) Based on Simulation Model (not tested) | | | | | | | |
| 2) Guaranteed by Design | | | | | | | |
| 3) Characterized on small sample size, $B_{AMP} = \pm 10\text{ mT}$, $f_{dec sel} = 2\text{ kHz}$, Low-pass filter: off, 3-sigma values (not tested) | | | | | | | |
| 4) Characterized on small sample size according to ISO 11452-8:2015, at 25 °C , with stray-field strength of 4 kA/m from X, Y and Z direction, 3-sigma values (not tested). | | | | | | | |

| Symbol | Parameter | Pin Name | Min. | Typ. | Max. | Unit | Conditions |
|--|---|----------|------|-----------|------|-----------------------|--|
| $\Delta SM_{\Delta XZ41life}$ | Relative Sensitivity Mismatch Drift between ΔX_{41} and ΔZ_{41} Channel over life time | OUTx | – | 1.0 | – | % | ¹⁾ After 1008 h HTOL |
| $\Delta Offset_{\Delta X41life}$ | Offset Drift of ΔX_{41} Channel over life time | OUTx | – | 30 | – | LSB ₁₅ | After 1008 h HTOL |
| $\Delta Offset_{\Delta Z41life}$ | Offset Drift of ΔZ_{41} Channel over life time | OUTx | – | 5 | – | LSB ₁₅ | After 1008 h HTOL |
| $SF_{R\Delta X41}$ | Stray-Field Rejection in ΔX_{41} Direction | OUTx | 99 | – | – | % | ⁴⁾ $T_A = 25^\circ C$ |
| $SF_{R\Delta Z41}$ | Stray-Field Rejection in ΔZ_{41} Direction | OUTx | 99 | – | – | % | ⁴⁾ $T_A = 25^\circ C$ HAL 3930-2300 |
| $SF_{R\Delta Z41}$ | Stray-Field Rejection in ΔZ_{41} Direction | OUTx | 96 | – | – | % | ⁴⁾ $T_A = 25^\circ C$ HAL 3930-0000 |
| $E_{Ophase\Delta XZ41}$ | Phase Error between ΔX_{41} and ΔZ_{41} Channel | OUTx | – | ± 2.2 | – | ° | between ΔX_{41} and ΔZ_{41} axis ¹⁾ |
| $E_{\Delta X41,noise}$ | Digital Noise of ΔX_{41} Hall-Plates Channel | OUTx | – | 2.4 | – | LSB ₁₅ | ⁵⁾ |
| $E_{\Delta Z41,noise}$ | Digital Noise of ΔZ_{41} Hall-Plates Channel | OUTx | – | 2.6 | – | LSB ₁₅ | ⁵⁾ |
| Off-Axis Rotary Setup (ΔXY) with Stray-Field Compensation (Setup 3a) | | | | | | | |
| $SM_{\Delta XY41}$ | Sensitivity Mismatch between ΔX_{41} and ΔY_{41} Channel | OUTx | –2 | – | 2 | % | ¹⁾ $T_A = 25^\circ C$ |
| $Sense_{\Delta XY41}$ | Sensitivity of ΔX_{41} and ΔY_{41} Channel | OUTx | 121 | 128 | 135 | LSB ₁₅ /mT | ¹⁾ $T_A = 25^\circ C$ |
| $\Delta SM_{\Delta XY41}$ | Thermal Sensitivity Mismatch Drift between ΔX_{41} and ΔY_{41} Channel | OUTx | –2.5 | – | 2.5 | % | ¹⁾ Related to $T_A = 25^\circ C$ |
| $Offset_{\Delta XY41}$ | Offset of ΔX_{41} and ΔY_{41} Channels | OUTx | –30 | – | 30 | LSB ₁₅ | $T_A = 25^\circ C$ |
| $\Delta Offset_{\Delta XY41}$ | Offset Drift of ΔX_{41} and ΔY_{41} Channels | OUTx | –50 | – | 50 | LSB ₁₅ | Related to $T_A = 25^\circ C$ |
| $\Delta SM_{\Delta XY41life}$ | Relative Sensitivity Mismatch Drift between ΔX_{41} and ΔY_{41} Channels over life time | OUTx | – | 1.0 | – | % | ¹⁾ After 1008 h HTOL |
| $\Delta Offset_{\Delta XY41life}$ | Offset Drift of ΔX_{41} and ΔY_{41} Channel over life time | OUTx | – | 30 | – | LSB ₁₅ | After 1008 h HTOL |
| $SF_{R\Delta XY41}$ | Stray-Field Rejection in ΔX_{41} and ΔY_{41} Direction | OUTx | 99 | – | – | % | |
| $E_{Ophase\Delta XY41}$ | Phase Error between ΔX_{41} and ΔY_{41} Channel | OUTx | – | ± 2.2 | – | ° | ¹⁾ between ΔX_{41} and ΔY_{41} axis |
| $E_{\Delta XY41,noise}$ | Digital Noise of ΔX_{41} and ΔY_{41} Hall-Plates Channel | OUTx | – | 2.4 | – | LSB ₁₅ | ⁵⁾ |
| All values are characterized on small sample size and 3-sigma values as long as not otherwise specified (not tested) | | | | | | | |
| ¹⁾ Based on Simulation Model (not tested) | | | | | | | |
| ⁴⁾ Characterized on small sample size according to ISO 11452-8:2015, at 25°C, with stray-field strength of 4 kA/m from X, Y and Z direction, 3-sigma values (not tested). | | | | | | | |
| ⁵⁾ Characterized on small sample size, 1-sigma values of COMP_CHx, fdecsel = 2 kHz, Low-pass filter: off (not tested) | | | | | | | |

| Symbol | Parameter | Pin Name | Min. | Typ. | Max. | Unit | Conditions |
|--|--|----------|------|------|------|-----------------------|-----------------------------------|
| 3D Measurement Setup without Stray-Field Compensation (Setup 4a, 5 & 6) | | | | | | | |
| SM _{XYZ} | Sensitivity Mismatch between X or Y and Z Channel | OUTx | -4 | - | 4 | % | T _A = 25 °C |
| SM _{XY} | Sensitivity Mismatch between X and Y Channel | OUTx | -2 | - | 2 | % | T _A = 25 °C |
| Sense _{XYZ} | Sensitivity of X,Y and Z Hall-plate | OUTx | 123 | 128 | 133 | LSB ₁₅ /mT | T _A = 25 °C |
| ΔSM _{XYZ} | Thermal Sensitivity Mismatch Drift between X or Y and Z Hall Plates | OUTx | -2.5 | - | 2.5 | % | Related to T _A = 25 °C |
| ΔSM _{XY} | Thermal Sensitivity Mismatch Drift between X and Y Hall Plates | OUTx | -2 | - | 2 | % | Related to T _A = 25 °C |
| Offset _{XY} | Offset of X and Y Hall-plates | OUTx | -20 | - | 20 | LSB ₁₅ | T _A = 25 °C |
| Offset _Z | Offset of Z Hall-plate | OUTx | -12 | - | 12 | LSB ₁₅ | T _A = 25 °C |
| ΔOffset _{XY} | Offset Drift of X and Y Hall-plates | OUTx | -40 | - | 40 | LSB ₁₅ | Related to T _A = 25 °C |
| ΔOffset _Z | Offset Drift of Z Hall-plate | OUTx | -15 | - | 15 | LSB ₁₅ | Related to T _A = 25 °C |
| ΔSM _{XYZlife} | Relative Sensitivity Mismatch Drift between X, Y and Z Hall Plates over life time | OUTx | - | 1.0 | - | % | After 1008 h HTOL |
| ΔOffset _{XYlife} | Offset Drift of X and Y Hall-plates over life time | OUTx | - | 30 | - | LSB ₁₅ | After 1008 h HTOL |
| ΔOffset _{Zlife} | Offset Drift of Z Hall-plate over life time | OUTx | - | 5 | - | LSB ₁₅ | After 1008 h HTOL |
| E _{ophaseXYZ} | Phase Error between X, Y and Z Hall-Plates | OUTx | - | ±1.6 | - | ° | XY axis |
| | | - | - | ±1.6 | - | ° | XZ axis |
| | | - | - | ±1.6 | - | ° | YZ axis |
| E _{XYZ,noise} | Digital Noise of X, Y or Z Hall-Plates Channel | OUTx | - | 2.2 | - | LSB ₁₅ | ⁵⁾ |
| 2D Measurement Setup (virtual centered Pixel XY) without Stray-Field Compensation (Setup 4b) | | | | | | | |
| SM _{ΣXY41} | Sensitivity Mismatch between ΣX ₄₁ and ΣY ₄₁ Channel | OUTx | -3 | - | 3 | % | T _A = 25 °C |
| Sense _{ΣXY41} | Sensitivity of ΣX ₄₁ and ΣY ₄₁ Channel | OUTx | 121 | 128 | 135 | LSB/mT | T _A = 25 °C |
| ΔSM _{ΣXY41} | Thermal Sensitivity Mismatch Drift between ΣX ₄₁ and ΣY ₄₁ Channel | OUTx | -2 | - | 2 | % | Related to T _A = 25 °C |
| Offset _{ΣXY41} | Offset of ΣX ₄₁ and ΣY ₄₁ Channel | OUTx | -25 | - | 25 | LSB ₁₅ | T _A = 25 °C |
| ΔOffset _{ΣXY41} | Offset Drift of ΣX ₄₁ and ΣY ₄₁ Channel | OUTx | -40 | - | 40 | LSB ₁₅ | Related to T _A = 25 °C |
| ΔSM _{ΣXY41life} | Relative Sensitivity Mismatch Drift between ΣX ₄₁ and ΣY ₄₁ Channel over life time | OUTx | - | 1.0 | - | % | After 1008 h HTOL |
| All values are characterized on small sample size and 3-sigma values as long as not otherwise specified (not tested) | | | | | | | |
| ⁵⁾ Characterized on small sample size, 1-sigma values of COMP_CHx, fdecsel = 2 kHz, Low-pass filter: off (not tested) | | | | | | | |

| Symbol | Parameter | Pin Name | Min. | Typ. | Max. | Unit | Conditions |
|--|--|----------|------|-----------|------|-------------------|-------------------|
| $\Delta\text{Offset}_{\Sigma XY41\text{life}}$ | Offset Drift of ΣX_{41} and ΣY_{41} Channel over Life Time | OUTx | – | 30 | – | LSB ₁₅ | After 1008 h HTOL |
| $E_{\text{phase}\Sigma XY41}$ | Phase Error between ΣX_{41} and ΣY_{41} | OUTx | – | ± 2.2 | – | ° | 1) |
| $E_{\Sigma XY41,\text{noise}}$ | Digital Noise of ΣX_{41} and ΣY_{41} Hall-Plates Channel | OUTx | – | 1.9 | – | LSB ₁₅ | 5) |

All values are characterized on small sample size and 3-sigma values as long as not otherwise specified (not tested)

1) Based on Simulation Model (not tested)

5) Characterized on small sample size, 1-sigma values of COMP_CHx, fdecsel = 2 kHz, Low-pass filter: off (not tested)

5.11. Temperature Sensor

at $T_A = -40\text{ °C}$ to 150 °C , $V_{\text{SUP}} = 3.0\text{ V}$ to 18.0 V , $\text{GND} = 0\text{ V}$, after programming and locking of the sensor, at Recommended Operation Conditions if not otherwise specified in the column “Conditions”.

Typical Characteristics for $T_A = 25\text{ °C}$ and $V_{\text{SUP}} = 5.0\text{ V}$.

| Symbol | Parameter | Pin No. | Min. | Typ. | Max. | Unit | Conditions |
|--------------------------------|--|---------|------|-------|------|---------------------------|----------------------|
| $\text{TADJ}_{\text{Gain}}$ | Gain of Temperature Sensor | OUT1 | – | 89.25 | – | LSB ₁₅ / °C | 1) for TADJ register |
| $\text{TADJ}_{\text{Offset}}$ | Temperature Sensor Offset | OUT1 | – | 3720 | – | LSB ₁₅ | 1) for TADJ register |
| $\text{TSENT}_{\text{Gain}}$ | Gain of Temperature Sensor for SENT Output | OUT1 | – | 8.1 | – | LSB ₁₂ / °C | 1) SENT Slow Channel |
| $\text{TSENT}_{\text{Offset}}$ | Temperature Sensor Offset for SENT Output | OUT1 | – | 565.3 | – | LSB ₁₂ | 1) SENT Slow Channel |
| ΔT_{Lin} | Temperature Sensor Differential Accuracy (Linearity Error) | OUT1 | –2 | – | 2 | °C | 2) |
| ΔT_{Offset} | Temperature Sensor Offset Error | OUT1 | –5 | – | 5 | °C | 2) |

1) Not tested

2) Characterized on small sample size, 3-sigma values, not tested for each device

6. Application Notes

6.1. Ambient Temperature

Due to the internal power dissipation, the temperature on the silicon chip (junction temperature T_J) is higher than the temperature outside the package (ambient temperature T_A).

$$T_J = T_A + \Delta T$$

The maximum ambient temperature is a function of power dissipation, maximum allowable die temperature and junction to ambient thermal resistance (R_{thja}). With a typical supply voltage of 5.0 V the power dissipation P is 0.06 W. The junction to ambient thermal resistance R_{thja} is specified in Section 5.9. on page 55.

The difference between junction and ambient air temperature is expressed by the following equation (at static conditions and continuous operation):

$$\Delta T = P * R_{thjX}$$

The X represents junction to air, case or solder point.

For worst-case calculation, use the max. parameters for I_{SUP} and R_{thjX} , and the max. value for V_{SUP} from the application.

Note The calculated self-heating of the device is only valid for the R_{th} test boards. Depending on the application setup the final results in an application environment might deviate from these values.

6.2. EMC and ESD

Please contact TDK-Micronas for detailed information on EMC and ESD performance.

6.3. Application Circuit for HAL 3930

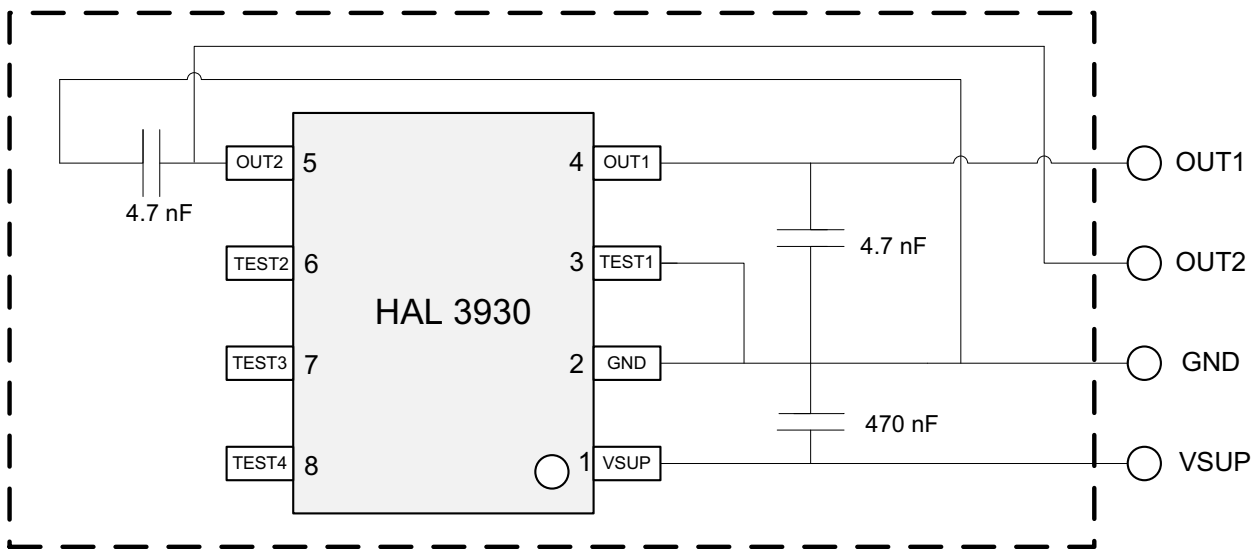


Fig. 6–1: Recommended application circuit for HAL 3930

6.4. Recommended Pad Size SOIC8 Package

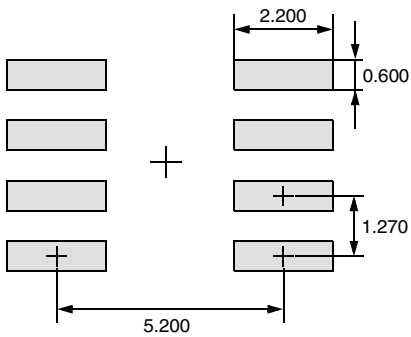


Fig. 6–2: Pad size recommendation for SOIC8 Package (all dimensions in mm)

7. Programming of the Sensor

HAL 3930 features two different customer modes. In **Application Mode** the sensor provides a digital output signal according SENT standard or by transmission of PWM signals. In **Programming Mode (Listen Mode)** it is possible to change the register settings of the sensor.

After power-up the sensor is always operating in the **Application Mode**. It is switched to the **Programming Mode** by a BiPhase-M protocol via output voltage modulation. Therefore the programming device needs to provide a long sync pulse at the output pin.

7.1. Programming Interface

In Programming Mode HAL 3930 is addressed by modulating a serial telegram on the sensor's output pin. The sensor answers with a modulation of the output voltage.

A logical "0" is coded as no level change within the bit time. A logical "1" is coded as a level change of typically 50 % of the bit time. After each bit, a level change occurs (see Fig. 7–1).

The serial telegram is used to transmit the memory content, error codes and digital values of the angle information from and to the sensor.

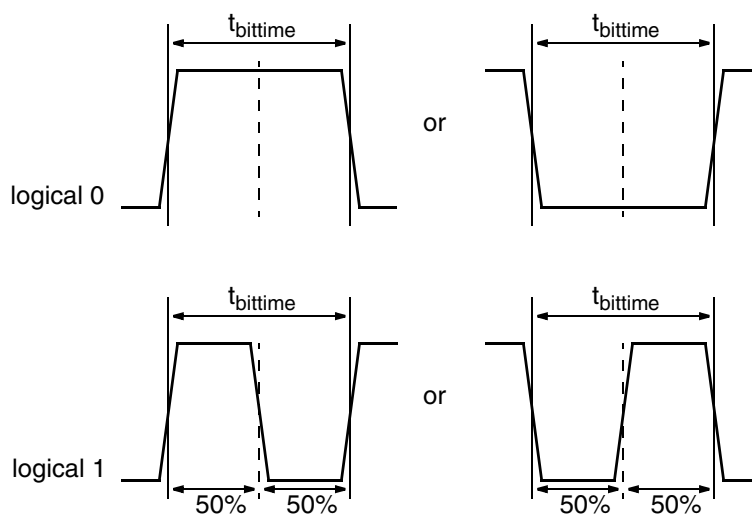


Fig. 7–1: Definition of logical 0 and 1 bit

Table 7–1: Telegram parameters for the Host (All voltages are referenced to GND.)

| Symbol | Parameter | Pin No. | Limit Values | | | Unit | Test Conditions |
|----------------|--|---------|----------------|------|----------------|------------|-------------------------------------|
| | | | Min. | Typ. | Max. | | |
| t_{h_bbit} | Host Biphase bit time | OUT1 | 0.01 | – | 1.1 | ms | |
| SR | Host slew rate Biphase protocol | OUT1 | 10 | – | – | V/ μ s | For recommended application circuit |
| V_{H_OUTL} | Host OUT pin voltage for low level during programming | OUT1 | – | – | 0.8 | V | |
| V_{H_OUTH} | Host OUT pin voltage for high level during programming | OUT1 | 2.4 | – | – | V | |
| $V_{SUPProgr}$ | V_{SUP} Voltage for memory programming | VSUP | $V_{SUP,min.}$ | – | $V_{SUP,max.}$ | V | |

7.2. Programming Environment and Tools

For the programming of HAL 3930 during product development a programming tool including hardware and software is available on request. It is recommended to use the TDK-Micronas tool kit (TDK MSP V1.x and LabView Programming Environment) in order to facilitate the product development. The details of programming sequences are content of the HAL/HAR/HAC 393x Programming Guide.

7.3. Programming Information

For production and qualification tests, it is mandatory to set the LOCK bit to one after final adjustment and programming of HAL 3930.

Before locking the device, it is recommended to read back all register values to ensure that the intended data is correctly stored in the sensor's memory. Alternatively, it is also possible to cross-check the sensor output signal with the intended output behavior.

The success of the LOCK process shall be checked by reading the status of the LOCK bit after locking.

Even after locking the device it is still possible to read the memory content.

It is also mandatory to check the acknowledge of the sensor after each write and store sequence to verify if the programming of the sensor was successful.

ElectroStatic Discharges (ESD) may disturb the programming pulses. Please take precautions against ESD.

Note A description of the communication protocol and the programming of the sensor is available in a separate document HAL/HAR/HAC 393x Programming Guide.

8. Document History

1. Data Sheet: "HAL 3930 Stray-Field Robust 3D Position Sensor with Digital Output Interfaces", Aug. 14, 2020, DSH000212_001EN. First release of the Data Sheet.

Major changes compared to previous Advance Information:

- Electrical and magnetic characteristics updated

2. Data Sheet: "HAL 3930 Stray-Field Robust 3D Position Sensor with Digital Output Interfaces", Feb. 17, 2021, DSH000212_002EN. Second release of the Data Sheet.

Major changes compared to previous Data Sheet:

- Value for max. B_{AMP} for setup 4b added
- Parameter t_{UOV} removed as it is covered by overall FDTI
- Values for V_{OL1} corrected (typ. and min. values were interchanged)
- Spec limits for $\Delta E_{\Theta tot}$ improved
- Spec limits for $\Delta E_{\Theta life}$ improved
- Conditions for $E_{\Theta SF_x}$ improved
- Vector direction for Z field inverted

3. Data Sheet: "HAL 3930 Stray-Field Robust 3D Position Sensor with Digital Output Interfaces", March 24, 2022, DSH000212_003EN. Third release of the Data Sheet.
Describing ROM-ID releases: 0000 and 2300

Major changes compared to previous Data Sheet:

- ROM-ID 2300 added
- Recommendation for SENT tick times added
- Spec limits for $E_{\Theta noise_1}$ and $E_{\Theta noise_2}$ modified
- Spec limits for $SF_{R\Delta Z41}$ improved
- Note added for Application Note: "HAL 3900/HAL 3930 – Procedure to Avoid Temperature-Dependent Checksum Calculation Error"