



SGM2077A

1.2A, Ultra-High PSRR, Fast Load Transient, 1.2V Logic, Bias Rail CMOS Voltage Regulator

GENERAL DESCRIPTION

The SGM2077A is an ultra-high PSRR, fast transient response, low noise and low dropout voltage linear regulator which is designed using CMOS technology. It provides 1.2A output current capability. The operating input voltage range is from 0.5V to 5.5V and bias supply voltage range is from 2.5V to 5.5V. The adjustable output voltage range is from 0.5V to 3.3V.

Other features include 1.2V logic-controlled shutdown mode, short-circuit current limit and thermal shutdown protection. The SGM2077A has automatic discharge function to quickly discharge V_{OUT} in the disabled status.

The SGM2077A is available in a Green WLCSP-0.8x1.2-6B-A package. It operates over an operating temperature range of -40°C to +125°C.


FEATURES

- **Input Supply Voltage Range: 0.5V to 5.5V**
- **Bias Supply Voltage Range: 2.5V to 5.5V**
- **Fixed Outputs of 0.75V, 0.8V, 0.85V, 1.0V, 1.05V, 1.1V, 1.15V, 1.2V, 1.8V, 2.8V, 3.0V and 3.3V**
- **Adjustable Output from 0.5V to 3.3V**
- **Output Voltage Accuracy: $\pm 0.8\%$ at +25°C**
- **High PSRR: 70dB (TYP) at 1kHz**
- **Low Dropout Voltage: 60mV (TYP) at 1.2A**
- **Low Bias Input Current: 96 μ A (TYP)**
- **Very Low Bias Input Current in Shutdown: < 1 μ A**
- **Low Noise: 29 μ V_{RMS} (TYP)**
- **Fast Load Transient Response**
- **Output Current Limit**
- **Stable with Small Case Size Ceramic Capacitors**
- **Thermal Shutdown Protection**
- **1.2V Logic Level Enable Input for ON/OFF Control**
- **-40°C to +125°C Operating Temperature Range**
- **Available in a Green WLCSP-0.8x1.2-6B-A Package**


APPLICATIONS

- Portable Equipment
- Smartphone
- Industrial and medical Equipment

TYPICAL APPLICATION

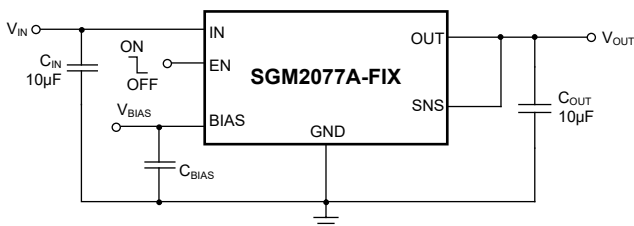

Fixed Voltage Typical Application Circuit

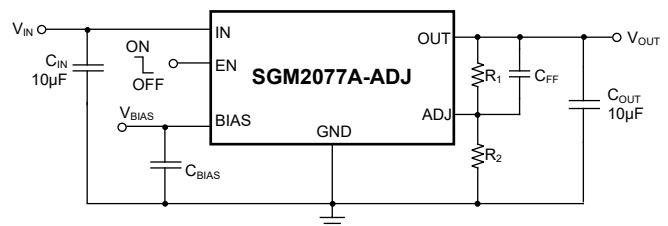

Adjustable Voltage Typical Application Circuit

Figure 1. Typical Application Circuits


1.2A, Ultra-High PSRR, Fast Load Transient, SGM2077A 1.2V Logic, Bias Rail CMOS Voltage Regulator

PACKAGE/ORDERING INFORMATION

MODEL	PACKAGE DESCRIPTION	SPECIFIED TEMPERATURE RANGE	ORDERING NUMBER	PACKAGE MARKING	PACKING OPTION
SGM2077A-0.75	WLCSP-0.8x1.2-6B-A	-40°C to +125°C	SGM2077A-0.75XG/TR	XXX 0HH	Tape and Reel, 3000
SGM2077A-0.8	WLCSP-0.8x1.2-6B-A	-40°C to +125°C	SGM2077A-0.8XG/TR	XXX 0HI	Tape and Reel, 3000
SGM2077A-0.85	WLCSP-0.8x1.2-6B-A	-40°C to +125°C	SGM2077A-0.85XG/TR	XXX 0HJ	Tape and Reel, 3000
SGM2077A-1.0	WLCSP-0.8x1.2-6B-A	-40°C to +125°C	SGM2077A-1.0XG/TR	XXX 0HK	Tape and Reel, 3000
SGM2077A-1.05	WLCSP-0.8x1.2-6B-A	-40°C to +125°C	SGM2077A-1.05XG/TR	XXX 0HL	Tape and Reel, 3000
SGM2077A-1.1	WLCSP-0.8x1.2-6B-A	-40°C to +125°C	SGM2077A-1.1XG/TR	XXX 0HM	Tape and Reel, 3000
SGM2077A-1.15	WLCSP-0.8x1.2-6B-A	-40°C to +125°C	SGM2077A-1.15XG/TR	XXX 0HN	Tape and Reel, 3000
SGM2077A-1.2	WLCSP-0.8x1.2-6B-A	-40°C to +125°C	SGM2077A-1.2XG/TR	XXX 0HO	Tape and Reel, 3000
SGM2077A-1.8	WLCSP-0.8x1.2-6B-A	-40°C to +125°C	SGM2077A-1.8XG/TR	XXX 0HP	Tape and Reel, 3000
SGM2077A-2.8	WLCSP-0.8x1.2-6B-A	-40°C to +125°C	SGM2077A-2.8XG/TR	XXX 0HQ	Tape and Reel, 3000
SGM2077A-3.0	WLCSP-0.8x1.2-6B-A	-40°C to +125°C	SGM2077A-3.0XG/TR	XXX 0HR	Tape and Reel, 3000
SGM2077A-3.3	WLCSP-0.8x1.2-6B-A	-40°C to +125°C	SGM2077A-3.3XG/TR	XXX 0HS	Tape and Reel, 3000
SGM2077A-ADJ	WLCSP-0.8x1.2-6B-A	-40°C to +125°C	SGM2077A-ADJXG/TR	XXX 08X	Tape and Reel, 3000

MARKING INFORMATION

NOTE: X = Date Code. XX = Trace Code.



Green (RoHS & HSF): SG Micro Corp defines "Green" to mean Pb-Free (RoHS compatible) and free of halogen substances. If you have additional comments or questions, please contact your SGMICRO representative directly.

ABSOLUTE MAXIMUM RATINGS

IN, BIAS, EN to GND	-0.3V to 6V
OUT, SNS, ADJ to GND	-0.3V to MIN(V _{IN} + 0.3V, 6V)
Package Thermal Resistance	
WLCSP-0.8×1.2-6B-A, θ _{JA}	177°C/W
WLCSP-0.8×1.2-6B-A, θ _{JB}	32°C/W
WLCSP-0.8×1.2-6B-A, θ _{JC}	48°C/W
Junction Temperature.....	+150°C
Storage Temperature Range	-65°C to +150°C
Lead Temperature (Soldering, 10s).....	+260°C
ESD Susceptibility	
HBM.....	5000V
CDM	1000V

RECOMMENDED OPERATING CONDITIONS

Input Supply Voltage Range, V _{IN}	0.5V to 5.5V
Bias Supply Voltage Range, V _{BIAS}	2.5V to 5.5V
Bias Effective Capacitance, C _{BIAS}	0.1µF (MIN)
Input Effective Capacitance, C _{IN}	2.2µF (MIN)
Output Effective Capacitance, C _{OUT}	4.7µF to 22µF
Operating Junction Temperature Range.....	-40°C to +125°C

OVERSTRESS CAUTION

Stresses beyond those listed in Absolute Maximum Ratings may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect reliability. Functional operation of the device at any conditions beyond those indicated in the Recommended Operating Conditions section is not implied.

ESD SENSITIVITY CAUTION


This integrated circuit can be damaged if ESD protections are not considered carefully. SGMICRO recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage. ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because even small parametric changes could cause the device not to meet the published specifications.

DISCLAIMER

SG Micro Corp reserves the right to make any change in circuit design, or specifications without prior notice.


PIN CONFIGURATIONS

SGM2077A-Fixed Output
(TOP VIEW)



WLCSP-0.8x1.2-6B-A

SGM2077A-ADJ
(TOP VIEW)



WLCSP-0.8x1.2-6B-A

PIN DESCRIPTION

PIN	NAME	FUNCTION
A1	OUT	Regulator Output Pin. It is recommended to use an output capacitor with effective capacitance in the range of 4.7μF to 22μF.
A2	IN	Input Voltage Supply Pin.
B1	SNS	Output Voltage Sense Input Pin (fixed voltage version only). Connect this pin to the load side of the output trace only in the fixed voltage version.
	ADJ	Feedback Input Pin (adjustable voltage version only). Connect this pin to the external resistor divider to adjust the output voltage. Place the resistors as close as possible to this pin.
B2	EN	Enable Pin. Drive EN high to turn on the regulator. Drive EN low to turn off the regulator. The EN pin has an internal 0.26μA pull-down current source which ensures that the device is turned off when the EN pin is floated.
C1	GND	Ground.
C2	BIAS	Bias Supply Voltage Pin for Internal Control Circuits. This pin is monitored by internal under-voltage lockout circuit.

1.2A, Ultra-High PSRR, Fast Load Transient, SGM2077A 1.2V Logic, Bias Rail CMOS Voltage Regulator

ELECTRICAL CHARACTERISTICS

($V_{IN} = V_{OUT(NOM)} + 0.3V$, $V_{BIAS} = 2.5V$ or $(V_{OUT(NOM)} + 1.6V)$ (whichever is greater), $V_{EN} = 1V$, $I_{OUT} = 1mA$, $C_{IN} = C_{OUT} = 10\mu F$ and $C_{BIAS} = 2.2\mu F$, $T_J = -40^\circ C$ to $+125^\circ C$, typical values are at $T_J = +25^\circ C$, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS	
Input Supply Voltage Range	V_{IN}		$V_{OUT(NOM)} + V_{DRO_VIN}$		5.5	V	
Bias Supply Voltage Range	V_{BIAS}		$(V_{OUT(NOM)} + 1.6) \geq 2.5$		5.5	V	
Under-Voltage Lockout	V_{UVLO}	V_{BIAS} rising		1.65	2	V	
		Hysteresis		0.3		V	
Feedback Voltage	V_{ADJ}	SGM2077A-ADJ, $T_J = +25^\circ C$	0.496	0.5	0.504	V	
		SGM2077A-ADJ	0.492		0.508		
Output Voltage Accuracy	V_{OUT}	$V_{IN} = (V_{OUT(NOM)} + 0.3V)$ to 5.5V, $V_{BIAS} = 2.5V$ or $(V_{OUT(NOM)} + 1.6V)$ to 5.5V, $I_{OUT} = 1mA$ to 1.2A	$T_J = +25^\circ C$	-0.8		0.8	%
			$T_J = -40^\circ C$ to $+125^\circ C$	-1.6		1.6	
V_{IN} Line Regulation	$\frac{\Delta V_{OUT}}{\Delta V_{IN} \times V_{OUT}}$	$V_{IN} = (V_{OUT(NOM)} + 0.3V)$ to 5.5V, $0.5V \leq V_{OUT(NOM)} \leq 1.8V$		0.001	0.03	%V	
		$V_{IN} = (V_{OUT(NOM)} + 0.3V)$ to 5.5V, $1.8V < V_{OUT(NOM)} \leq 3.3V$		0.004	0.05		
V_{BIAS} Line Regulation	$\frac{\Delta V_{OUT}}{\Delta V_{BIAS} \times V_{OUT}}$	$V_{BIAS} = 2.5V$ or $(V_{OUT(NOM)} + 1.6V)$ to 5.5V, $0.5V \leq V_{OUT(NOM)} \leq 1.8V$		0.02	0.1	%V	
		$V_{BIAS} = (V_{OUT(NOM)} + 1.6V)$ to 5.5V, $1.8V < V_{OUT(NOM)} \leq 3.3V$		0.07	0.28		
Load Regulation	ΔV_{OUT}	$I_{OUT} = 1mA$ to 1.2A		1	6	mV	
V_{IN} Dropout Voltage ⁽¹⁾	V_{DRO_VIN}	$I_{OUT} = 1.2A$		60	104	mV	
V_{BIAS} Dropout Voltage ⁽²⁾⁽³⁾	V_{DRO_BIAS}	$I_{OUT} = 1.2A$, $V_{IN} = V_{BIAS}$		1.1	1.4	V	
Output Current Limit	I_{LIMIT}	$V_{OUT} = 90\% \times V_{OUT(NOM)}$	1.35	2.2		A	
Short Current Limit	I_{SHORT}	$V_{OUT} = 0V$		1.1		A	
ADJ Pin Operating Current	I_{ADJ}		-10		10	nA	
BIAS Pin Quiescent Current	I_{BIAS}	$V_{BIAS} = 5.5V$		96	135	μA	
IN Pin Quiescent Current	I_{IN}	$V_{IN} = 5.5V$, $I_{OUT} = 0mA$		35	100	μA	
BIAS Pin Shutdown Current	$I_{BIAS(DIS)}$	$V_{EN} = 0V$			1	μA	
IN Pin Shutdown Current	$I_{IN(DIS)}$	$V_{EN} = 0V$, $T_J = +25^\circ C$			0.5	μA	
		$V_{EN} = 0V$			8		
EN Input Voltage	V_{IH}	Logic high	0.73			V	
	V_{IL}	Logic low			0.46	V	
EN Pull-Down Current	I_{EN}	$V_{EN} = 5.5V$, $V_{BIAS} = 5.5V$		0.26	1	μA	
Turn-On Time	t_{ON}	$V_{OUT(NOM)} = 1.1V$, from assertion of V_{EN} to $V_{OUT} = 98\% \times V_{OUT(NOM)}$		150		μs	
V_{IN} Power Supply Rejection Ratio	PSRR	V_{IN} to V_{OUT} , $f = 1kHz$, $V_{OUT(NOM)} = 1.1V$, $I_{OUT} = 150mA$, $V_{IN} \geq 1.6V$		70		dB	
V_{BIAS} Power Supply Rejection Ratio		V_{BIAS} to V_{OUT} , $f = 1kHz$, $V_{OUT(NOM)} = 1.1V$, $I_{OUT} = 150mA$, $V_{IN} \geq 1.6V$		80		dB	
Output Voltage Noise	e_n	$V_{OUT(NOM)} = 1.1V$, $V_{IN} = 1.6V$, $f = 10Hz$ to $100kHz$		29		μV_{RMS}	
Output Discharge Resistance	R_{DIS}	$V_{EN} = 0V$, $V_{OUT} = 0.5V$	50	80	120	Ω	
Thermal Shutdown Temperature	T_{SHDN}			160		$^\circ C$	
Thermal Shutdown Hysteresis	ΔT_{SHDN}			20		$^\circ C$	

NOTES:

- V_{IN} dropout voltage is defined as the difference between V_{IN} and V_{OUT} when V_{OUT} falls to $95\% \times V_{OUT(NOM)}$.
- V_{BIAS} dropout voltage refers to $V_{BIAS} - V_{OUT}$ when the IN and BIAS pins are connected together and V_{OUT} falls to $95\% \times V_{OUT(NOM)}$.
- For output voltages lower than 1.6V, V_{BIAS} dropout voltage is not applicable because the minimum bias supply voltage is 2.5V.

FUNCTIONAL BLOCK DIAGRAMS

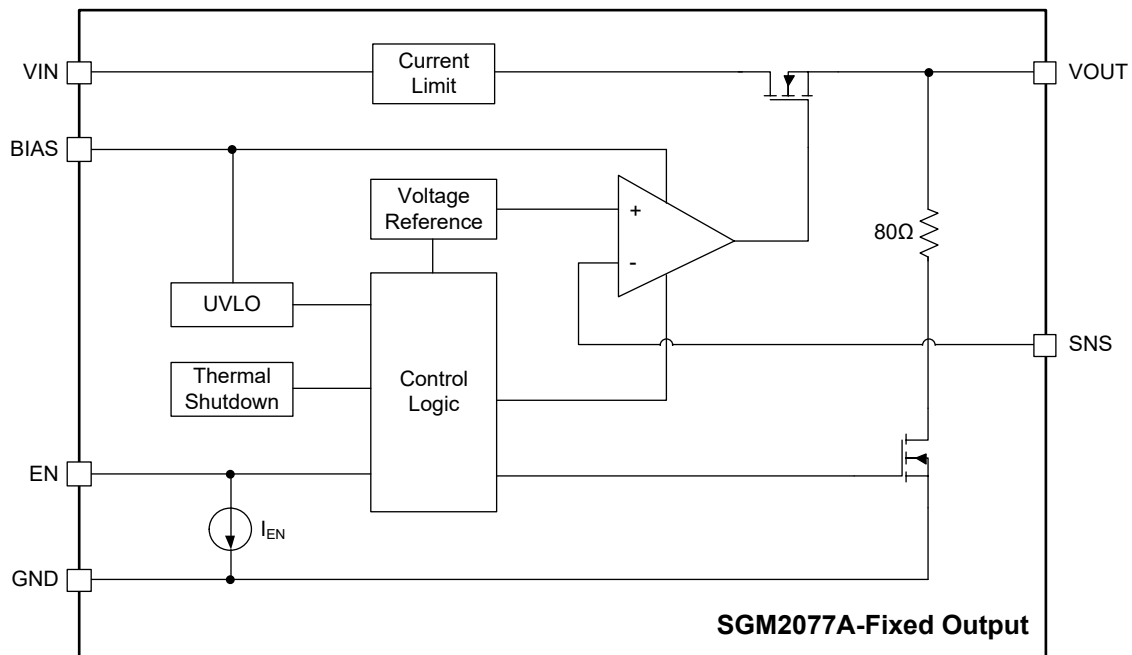


Figure 2. Fixed Output Voltage Internal Block Diagram







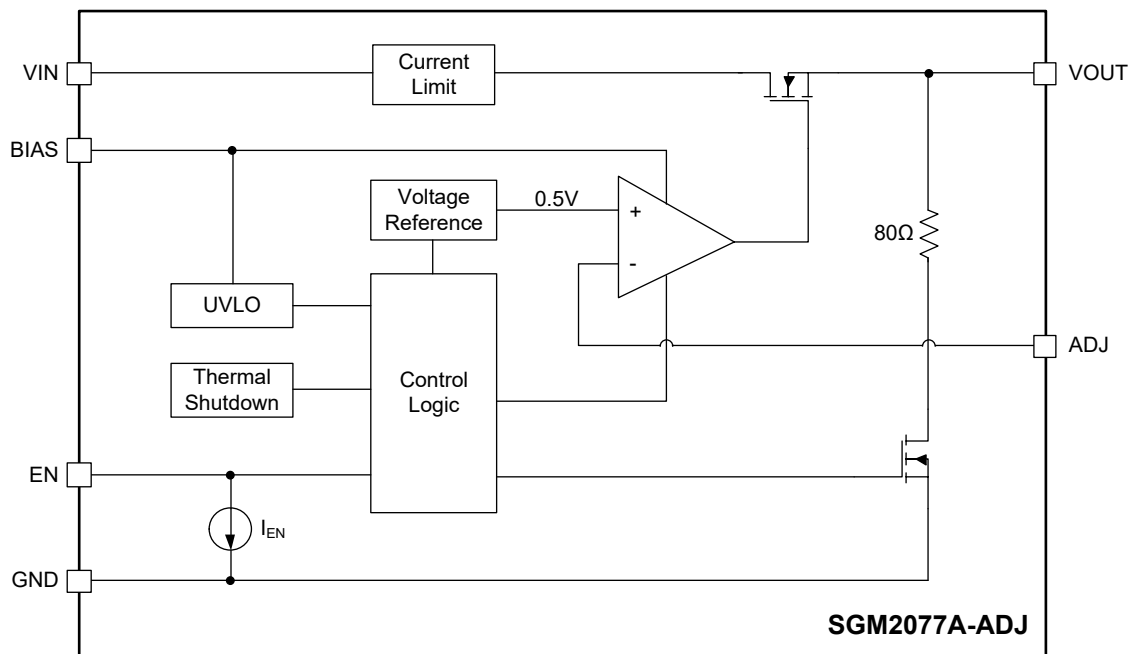


Figure 3. Adjustable Output Voltage Internal Block Diagram

TYPICAL PERFORMANCE CHARACTERISTICS







$T_J = +25^\circ\text{C}$, $V_{IN} = 1.4\text{V}$, $V_{EN} = V_{BIAS} = 2.7\text{V}$, $V_{OUT(NOM)} = 1.1\text{V}$, $C_{IN} = C_{OUT} = 10\mu\text{F}$, $C_{BIAS} = 2.2\mu\text{F}$, unless otherwise noted.

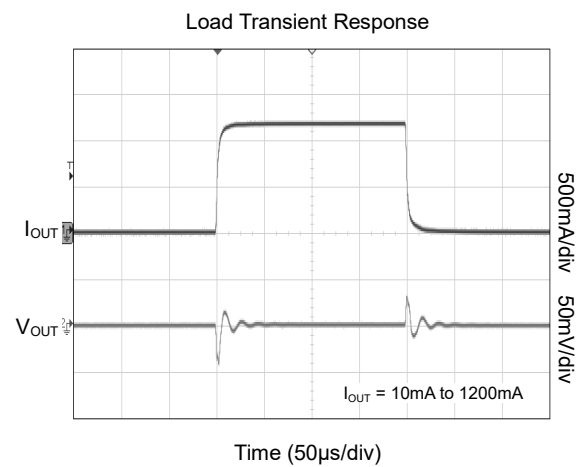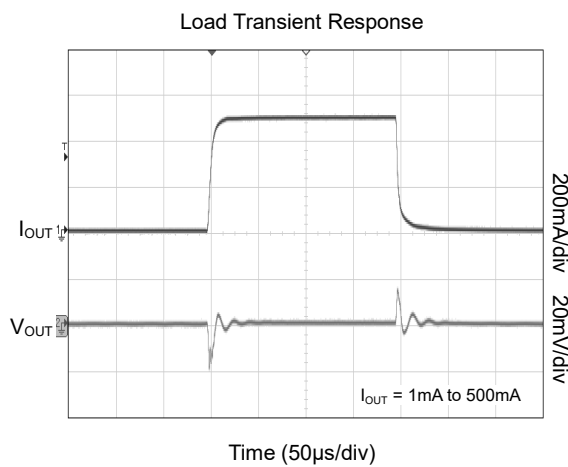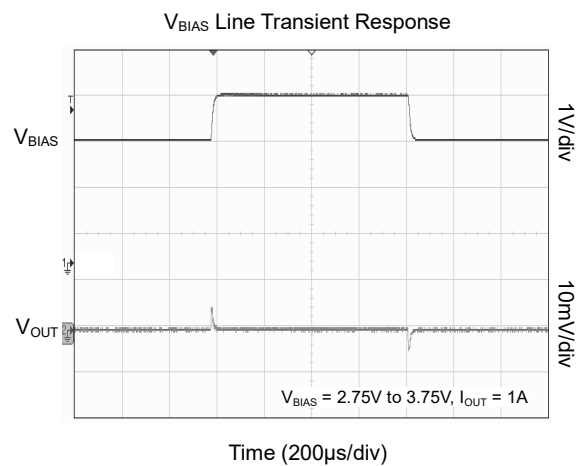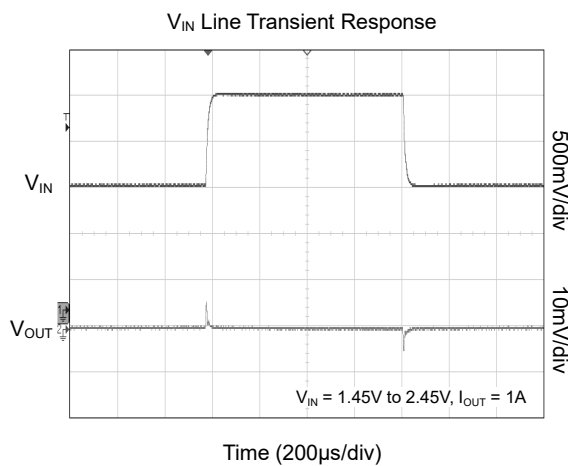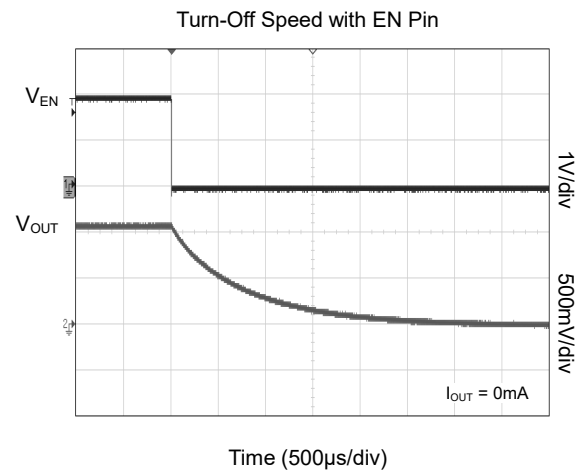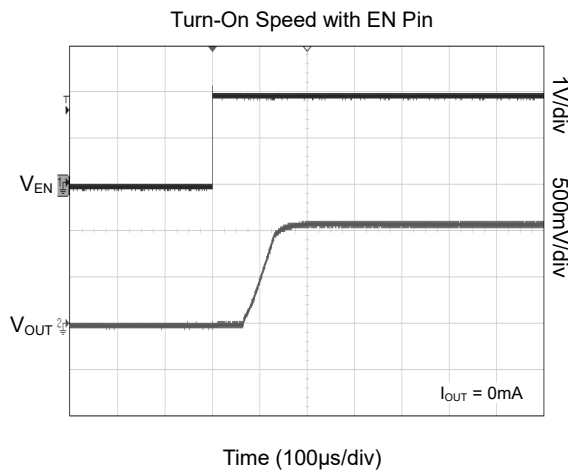

SGM2077A 1.2A, Ultra-High PSRR, Fast Load Transient, 1.2V Logic, Bias Rail CMOS Voltage Regulator

TYPICAL PERFORMANCE CHARACTERISTICS (continued)







$T_J = +25^\circ\text{C}$, $V_{IN} = 1.4\text{V}$, $V_{EN} = V_{BIAS} = 2.7\text{V}$, $V_{OUT(NOM)} = 1.1\text{V}$, $C_{IN} = C_{OUT} = 10\mu\text{F}$, $C_{BIAS} = 2.2\mu\text{F}$, unless otherwise noted.

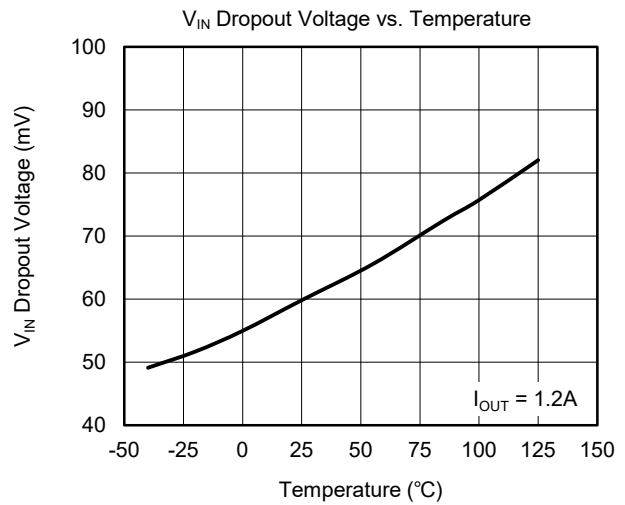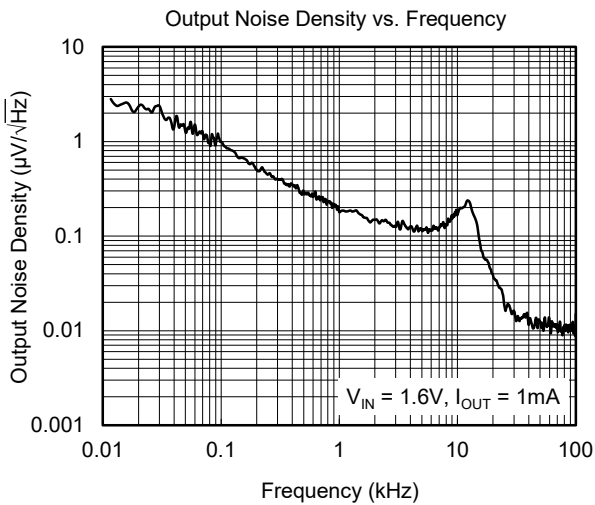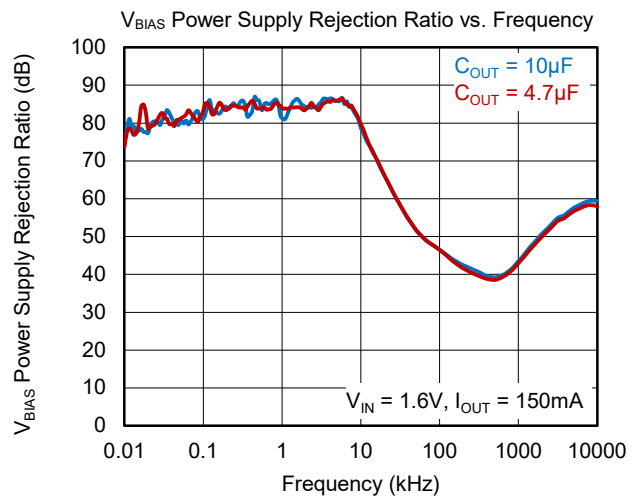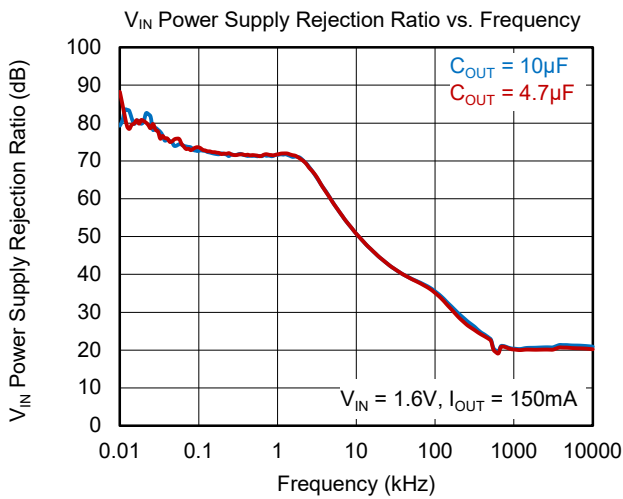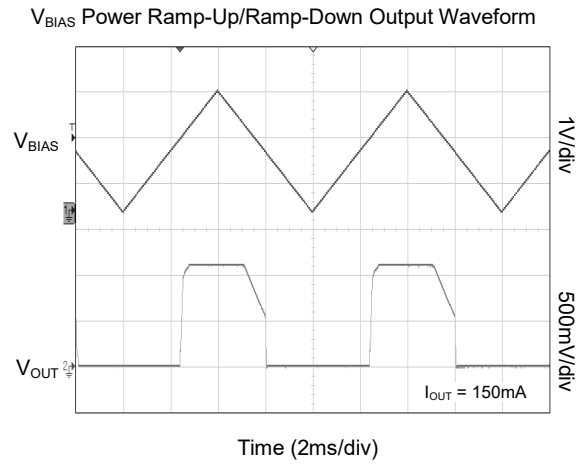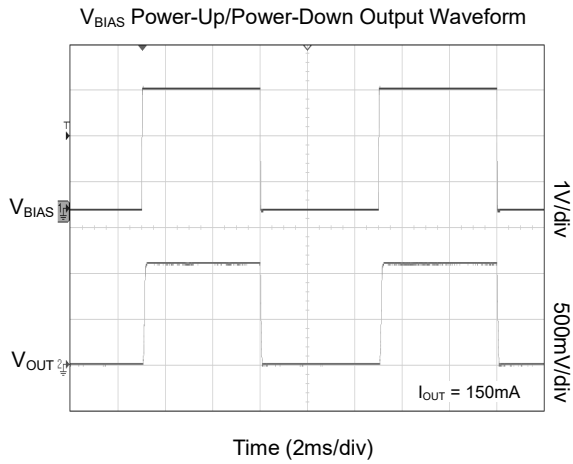

SGM2077A 1.2A, Ultra-High PSRR, Fast Load Transient, 1.2V Logic, Bias Rail CMOS Voltage Regulator

TYPICAL PERFORMANCE CHARACTERISTICS (continued)

$T_J = +25^\circ\text{C}$, $V_{IN} = 1.4\text{V}$, $V_{EN} = V_{BIAS} = 2.7\text{V}$, $V_{OUT(NOM)} = 1.1\text{V}$, $C_{IN} = C_{OUT} = 10\mu\text{F}$, $C_{BIAS} = 2.2\mu\text{F}$, unless otherwise noted.

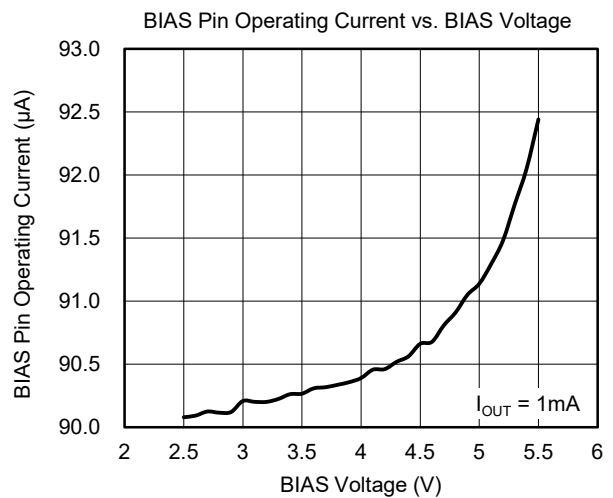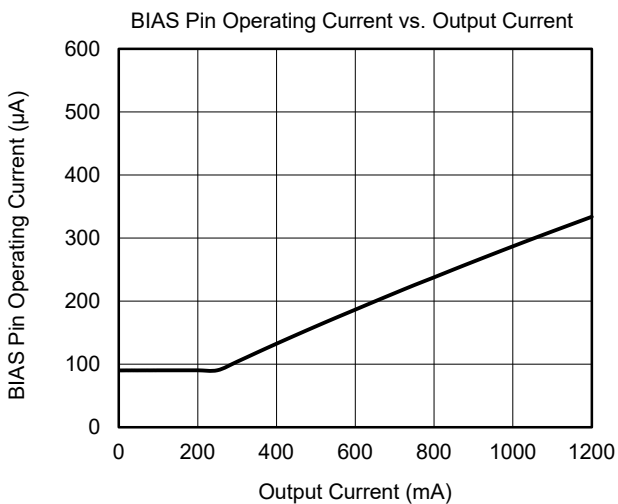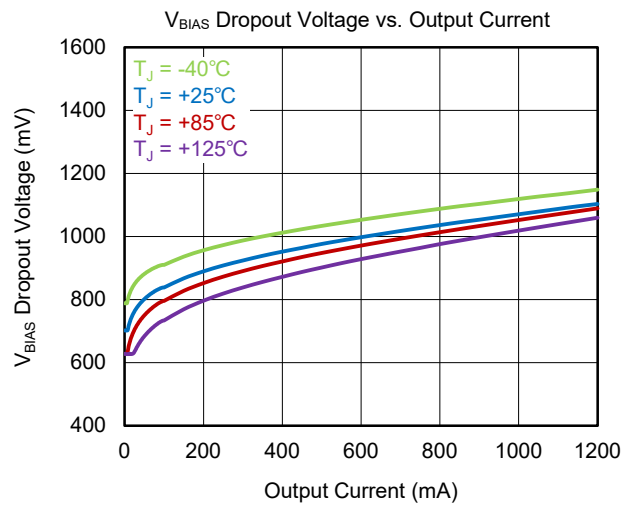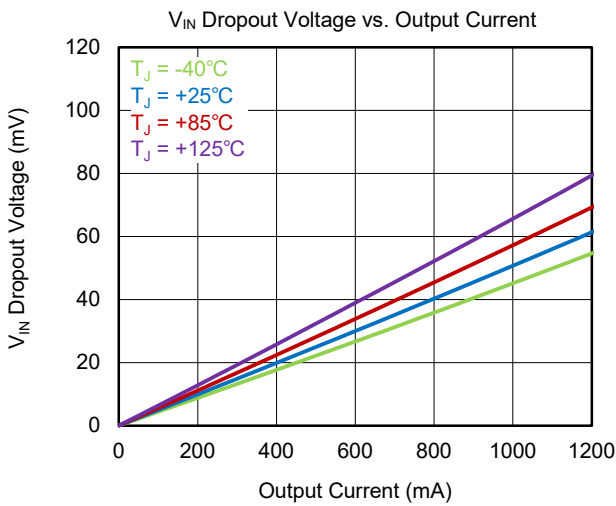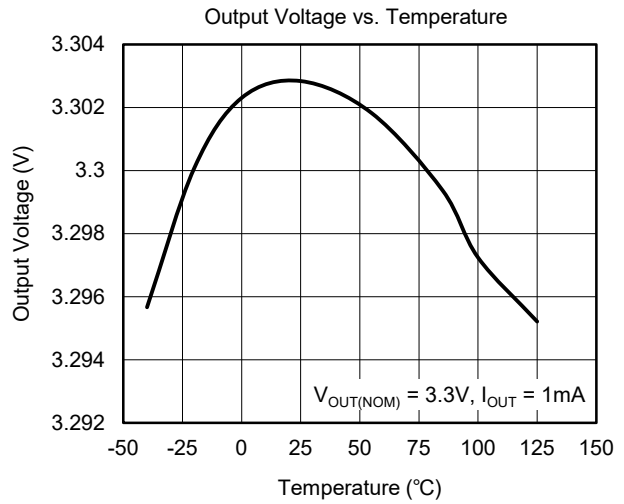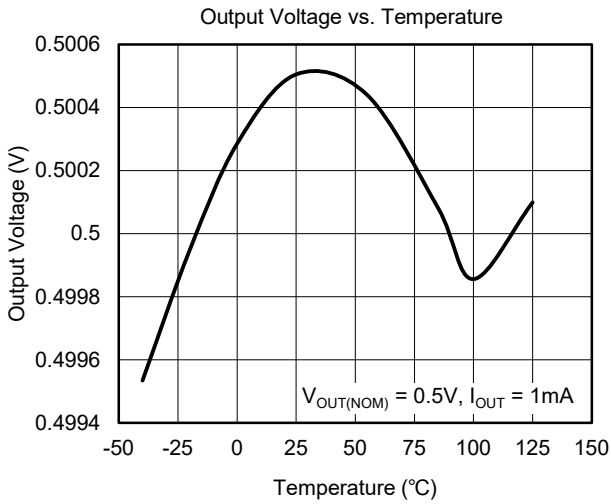

APPLICATION INFORMATION

The SGM2077A is a low noise, fast transient response high performance LDO, it consumes only 96µA (TYP) quiescent current and provides 1.2A output current. The SGM2077A provides the protection function for output overload, output short-circuit condition and overheating.

The SGM2077A is suitable for application which has noise sensitive circuit such as battery-powered equipment and smartphones.

Input Capacitor Selection (C_{IN})

The input decoupling capacitor should be placed as close as possible to the IN pin for ensuring the device stability. 4.7µF or greater X7R or X5R ceramic capacitor is selected to get good dynamic performance.

When V_{IN} is required to provide large current instantaneously, a large effective input capacitor is required. Multiple input capacitors can limit the input tracking inductance. Adding more input capacitors is available to restrict the ringing and to keep it below the device absolute maximum ratings.

Output Capacitor Selection (C_{OUT})

The output decoupling capacitor should be placed as close as possible to the OUT pin. A 10µF or greater X7R or X5R ceramic capacitor is selected to get good dynamic performance. The minimum effective capacitance of C_{OUT} that SGM2077A can remain stable is 4.7µF. For ceramic capacitor, temperature, DC bias and package size will change the effective capacitance, so enough margin of C_{OUT} must be considered in design. Larger capacitance and lower ESR C_{OUT} will help improve the load transient response and increase the high frequency PSRR.

Dropout Voltage

The SGM2077A specifies two dropout voltages because there are two power supplies V_{IN} and V_{BIAS} and one V_{OUT} regulator output. V_{IN} dropout voltage is

defined as the difference between V_{IN} and V_{OUT} when V_{OUT} falls 5% below V_{OUT(NOM)}. When the output voltage is lower than 1.6V, V_{BIAS} dropout voltage is not applicable because the minimum bias supply voltage is 2.5V.

When V_{OUT} begins to decrease and V_{BIAS} is high enough, the V_{IN} dropout voltage equals to V_{IN} - V_{OUT}. V_{BIAS} dropout voltage refers to V_{BIAS} - V_{OUT} when the IN and BIAS pins are connected together and V_{OUT} begins to decrease.

Adjustable Regulator

The output voltage of the SGM2077A can be adjusted from 0.5V to 3.3V. The ADJ pin will be connected to two external resistors as shown in Figure 4, the output voltage is determined by the following equation:

$$V_{OUT} = V_{ADJ} \times \left(1 + \frac{R_1}{R_2} \right) \tag{1}$$

where:

V_{OUT} is output voltage and V_{ADJ} is the internal voltage reference, V_{ADJ} = 0.5V.

One parallel capacitor (C_{FF}) with R₁ can be used to improve the feedback loop stability and PSRR, increase the transient response and reduce the output noise. Use R₂ ≤ 10kΩ with C_{FF} in the range of 1nF to 100nF (effective capacitance), or choose R₂ ≤ 1.5kΩ and the value of C_{FF} is unlimited.

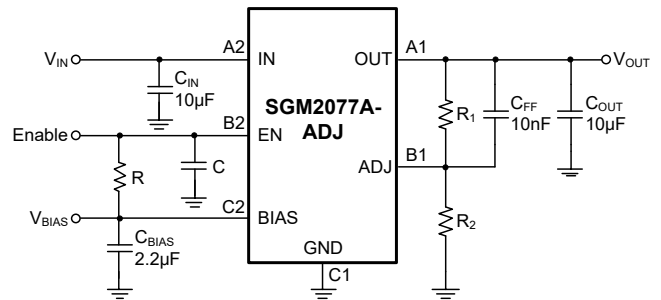


Figure 4. Adjustable Output Voltage Application

APPLICATION INFORMATION (continued)

Enable Operation

The SGM2077A uses the EN pin to enable/disable the device and to deactivate/activate the output automatic discharge function.

When the EN pin voltage is lower than 0.46V, the device is in shutdown state. There is no current flowing from IN to OUT pins. In this state, the automatic discharge transistor is active to discharge the output voltage through an 80Ω (TYP) resistor.

When the EN pin voltage is higher than 0.73V, the device is in active state. The output voltage is regulated to the expected value and the automatic discharge transistor is turned off. It is recommended that the rising and falling edge speeds of EN be faster than 100µs/V. Slow edge speeds may cause the output to repeatedly turn on and off.

The EN pin is pulled down by internal 0.26µA (TYP) current source when the EN pin is floated. This current source will ensure the SGM2077A in shutdown state and reduce the power dissipation in system.

Reverse Current Protection

The NMOS power transistor has an inherent body diode, this body diode will be forward biased when $V_{OUT} > V_{IN}$. When $V_{OUT} > V_{IN}$, the reverse current flowing from the OUT pin to the IN pin will damage the SGM2077A. If $V_{OUT} > (V_{IN} + 0.3V)$ is expected in the application, one external Schottky diode will be added between the OUT pin and IN pin to protect the SGM2077A.

Negatively Biased Output

When the output is negative voltage, the chip may not start-up due to parasitic effects. Ensure that the output is greater than -0.3V under all conditions. The load is too high can make $V_{OUT} < -0.3V$, a Schottky diode can be added between the OUT pin and GND pin.

Output Current Limit and Short-Circuit Protection

When overload events happen, the output current is internally limited to 2.2A (TYP). When the OUT pin is shorted to ground, the short-circuit protection will limit the output current to 1.1A (TYP).

Thermal Shutdown Protection

The SGM2077A can detect the temperature of die. When the die temperature exceeds the threshold value of thermal shutdown, the SGM2077A will be in shutdown state and it will remain in this state until the die temperature decreases to +140°C.

Power Dissipation (P_D)

Power dissipation (P_D) of the SGM2077A can be calculated by the equation $P_D = (V_{IN} - V_{OUT}) \times I_{OUT}$. The maximum allowable power dissipation (P_{D(MAX)}) of the SGM2077A is affected by many factors, including the difference between junction temperature and ambient temperature ($T_{J(MAX)} - T_A$), package thermal resistance from the junction to the ambient environment (θ_{JA}), the rate of ambient airflow and PCB layout. P_{D(MAX)} can be approximated by the following equation:

$$P_{D(MAX)} = (T_{J(MAX)} - T_A) / \theta_{JA} \tag{2}$$

The power dissipation needs to be less than 6W when thermal protection occurs. The power dissipation must be less than 6W for the device protection. For example, when output is short to GND, the short current is about 2A and the input voltage must be less than 3V, otherwise the SGM2077A may be damaged.

Therefore, thermal analysis for the chosen application is important to guarantee reliable performance over all conditions. To guarantee reliable operation, the junction temperature of the SGM2077A must not exceed 125°C.


REVISION HISTORY

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

Changes from Original (APRIL 2023) to REV.A	Page
Changed from product preview to production data.....	All

PACKAGE OUTLINE DIMENSIONS

WLCSP-0.8x1.2-6B-A

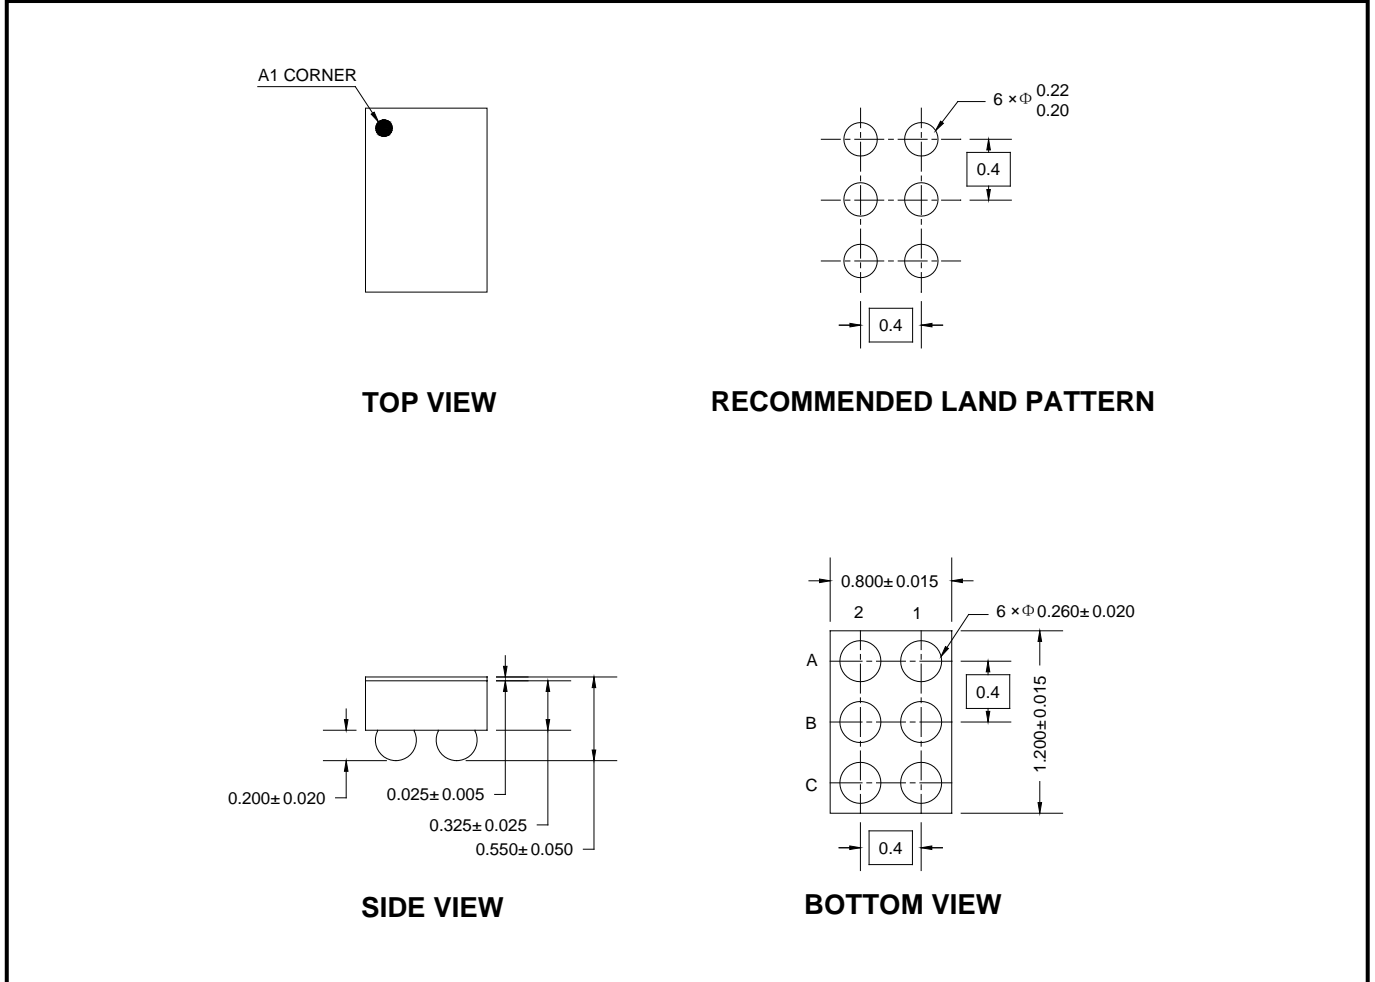

NOTE: All linear dimensions are in millimeters.

PACKAGE INFORMATION

TAPE AND REEL INFORMATION

REEL DIMENSIONS



TAPE DIMENSIONS



NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF TAPE AND REEL

Package Type	Reel Diameter	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P0 (mm)	P1 (mm)	P2 (mm)	W (mm)	Pin1 Quadrant
WLCSP-0.8×1.2-6B-A	7"	9.0	0.90	1.32	0.68	4.0	4.0	2.0	8.0	Q1

DD0001

PACKAGE INFORMATION

CARTON BOX DIMENSIONS



NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF CARTON BOX

Reel Type	Length (mm)	Width (mm)	Height (mm)	Pizza/Carton
7" (Option)	368	227	224	8
7"	442	410	224	18

DD0002