




Excellent Schottky Barrier Rectifiers



TO-220AC

Primary Characteristics		
I_F	10	A
V_{RRM}	300	V
I_{FSM}	150	A
V_F	0.95	V
T_J max	175	°C

Features
<ul style="list-style-type: none"> • Low Forward Voltage Drop • Excellent High Temperature Stability • Excellent Barrier Rectifier Technology • Soft, Fast Switching Capability

Mechanical Data
• Case: TO-220AC
• Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0
• Terminals: Lead free Plating (Tin Finish) Solderable per MIL-STD-202, Method 208
• Polarity: Cathode Band
• Weight: 1.90 grams (approximate)

Ordering Information			
Part No.	Remark	Package	Packing
EBRP10300ST	General	TO-220AC	50 & 2000 / Tube & Box
EBRP10300ST-H	Halogen Free		

Maximum Ratings (TA=25°C unless otherwise noted)			
PARAMETER	SYMBOL	EBRP10300ST	UNIT
Maximum repetitive peak reverse voltage	V_{RRM}	300	V
Maximum RMS voltage	V_{RMS}	210	V
Maximum DC blocking voltage	V_{DC}	300	V
Maximum average forward rectified current	I_F	10	A
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load	I_{FSM}	150	A
Maximum Instantaneous Forward Voltage IF=3A @ 25°C IF=10A @ 25°C	V_F	0.74 Typ. 0.95 Max.	V
Maximum DC Reverse Current @ TA=25°C at Rated DC Blocking Voltage @ TA=125°C	I_R	5 5	uA mA
Typical Junction Capacitance(NOTE1)	C_j	130	pF
Typical Thermal Resistance	$R_{\theta JC}$	3	°C/W
Operating Temperature Range	T_J	-55 to +175	°C
Storage Temperature Range	T_{STG}	-55 to +175	°C
Marking Code		P10300ST、10300ST	

NOTES:

- 1.Measured at 1.0MHZ and applied reverse voltage of 4.0V DC
- 2.Measured with IF=0.5A, IR=1A, IRR=0.25A



Excellent Schottky Barrier Rectifiers

Rating and Characteristics Curves

FIG. 1-Typical Forward Current Derating Curve

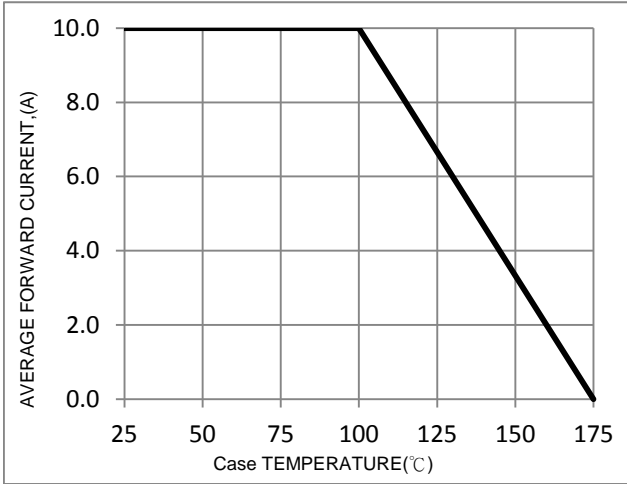


FIG. 2-Typical Forward Characteristics

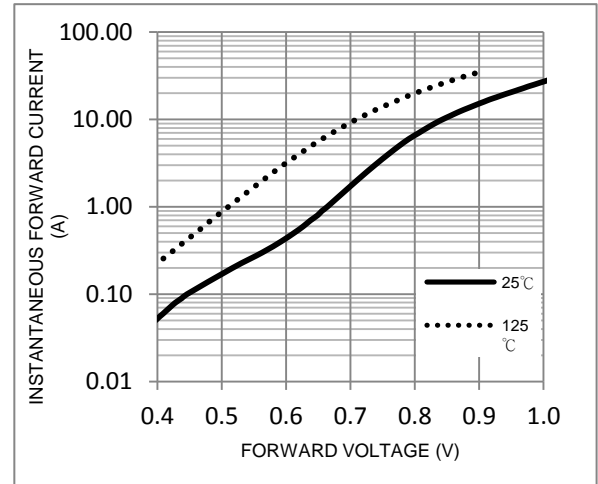


FIG. 3-Maximum Non-Repetitive Forward Surge Current

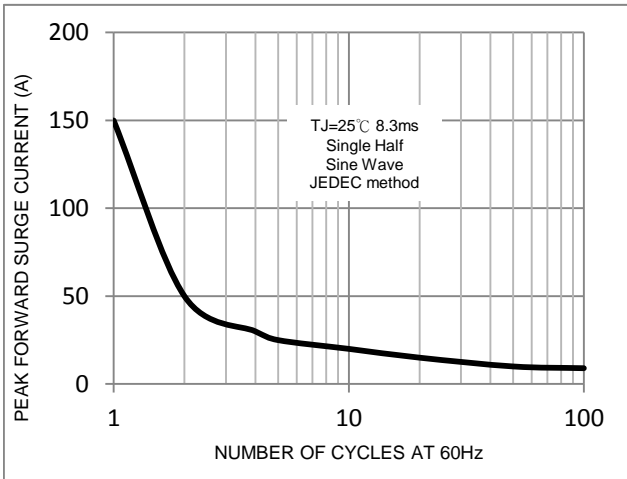


FIG. 4-Typical Reverse Characteristics



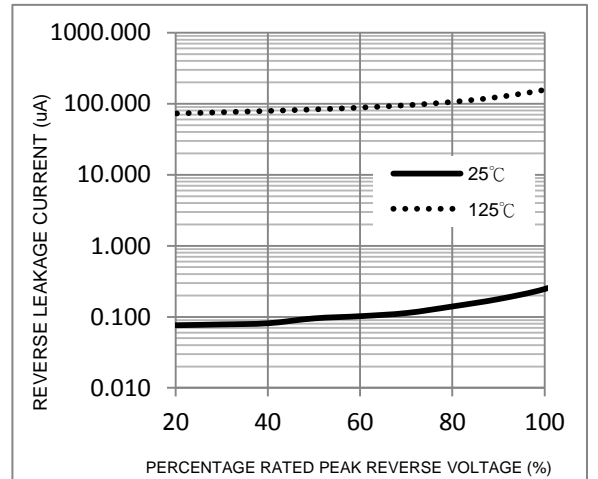


FIG. 5-Typical Junction Capacitance



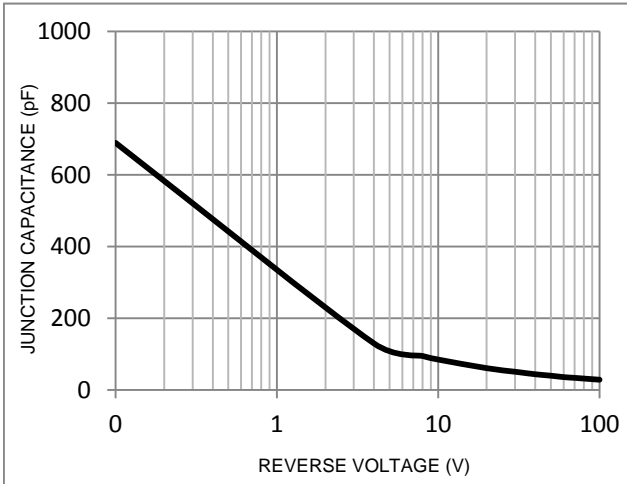

Package Outline Dimensions

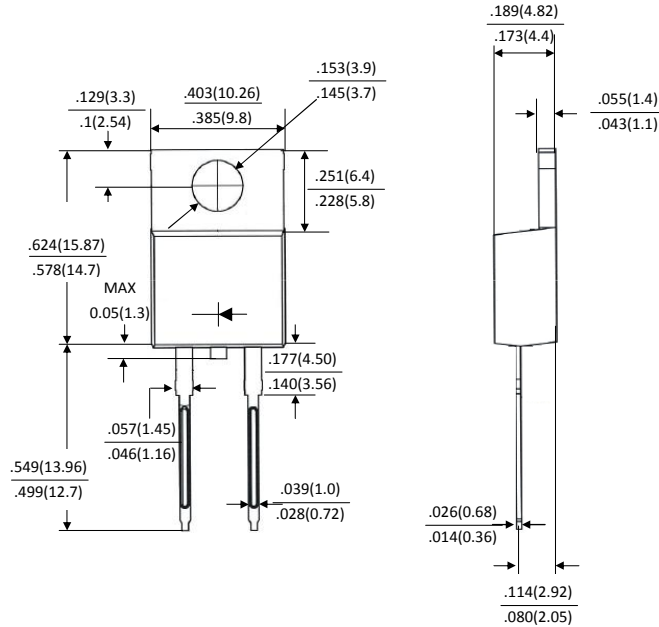

TO-220AC

Dimensions in inches and (millimeters)

Marking Information

