



EBRT30H60FCT



Excellent Schottky Barrier Rectifiers



ITO-220AB

Features

- Low power loss, high efficiency
- Low forward voltage drop
- High forward surge capability
- High frequency operation
- Excellent high temperature stability

Ordering Information

Part No.	Package	Packing
EBRT30H60FCT	ITO-220AB	50 & 2000 / Tube & Box

Device P/N

Part Number	Remark
EBRT30H60FCT	General
EBRT30H60FCT-H	Halogen Free

Primary Characteristics

I_F	30	A
V_{RRM}	60	V
I_{FSM}	200	A
V_F	0.52	V
$T_J \text{ max}$	175	°C

Mechanical Data

- Case: ITO-220AB
- Case Material: Molded Plastic, UL Flammability Classification Rating 94V-0
- Terminals: Matte Tin Finish annealed over Copper leadframe. Solderable per MIL-STD-202, Method 208
- Weight: 1.645 grams (approximate)

Maximum Ratings (TA=25°C unless otherwise noted)

PARAMETER	SYMBOL	EBRT30H60FCT	UNIT
Maximum repetitive peak reverse voltage	V_{RRM}	60	V
Maximum RMS voltage	V_{RMS}	42	V
Maximum DC blocking voltage	V_{DC}	60	V
Maximum average forward rectified current (Total)	I_F	30	A
(Per Leg)		15	
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load	I_{FSM}	200	A
Maximum Instantaneous Forward Voltage IF=2A @ 25°C IF=15A @ 25°C	V_F	0.36 Typ. 0.52 Max.	V
Maximum DC Reverse Current @ TA=25°C at Rated DC Blocking Voltage @ TA=125°C	I_R	0.5 60	mA
Typical Junction Capacitance(NOTE1)	C_j	920	pF
Typical Thermal Resistance	$R_{\theta JC}$	3	°C/W
Operating Temperature Range	T_J	-55 to +175	°C
Storage Temperature Range	T_{STG}	-55 to +175	°C
Marking Code		T30H60FCT、30H60FCT	

NOTES:

1. Measured at 1.0MHZ and applied reverse voltage of 4.0V DC



Excellent Schottky Barrier Rectifiers

Rating and Characteristics Curves

FIG. 1-Typical Forward Current Derating Curve

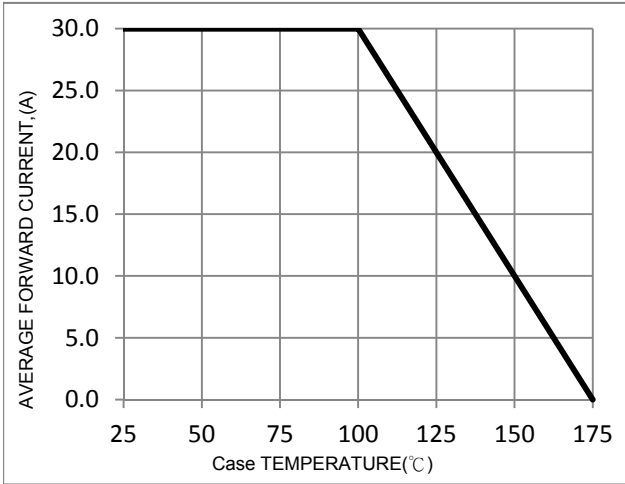


FIG. 2-Typical Forward Characteristics

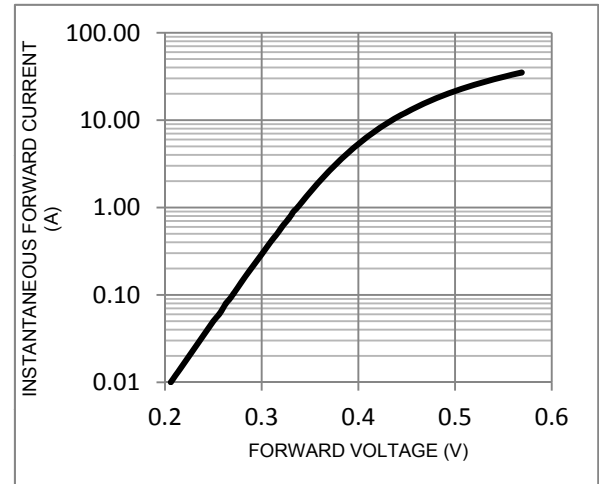


FIG. 3-Maximum Non-Repetitive Forward Surge Current

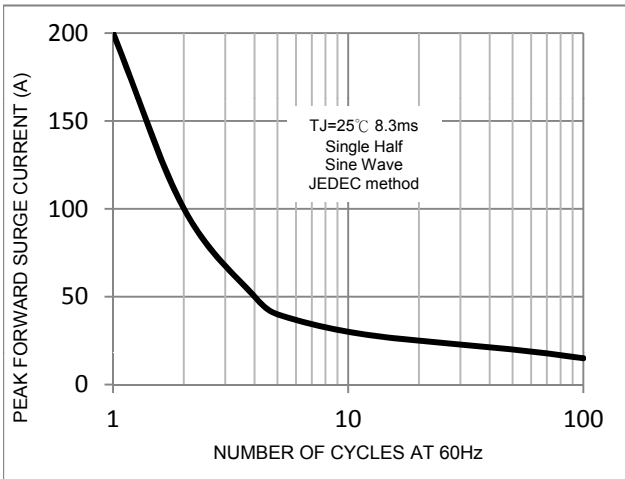


FIG. 4-Typical Reverse Characteristics



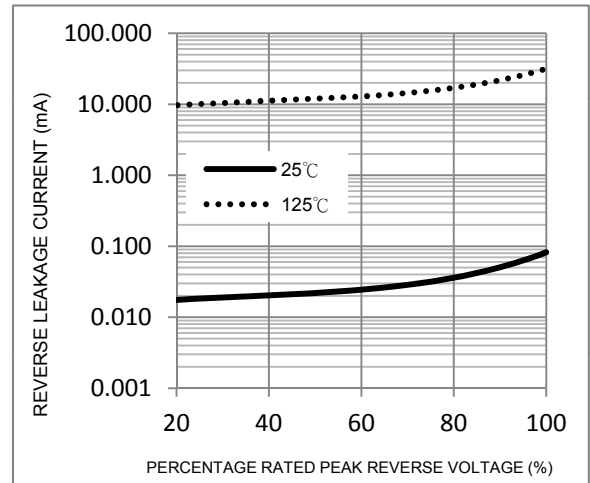


FIG. 5-Typical Junction Capacitance



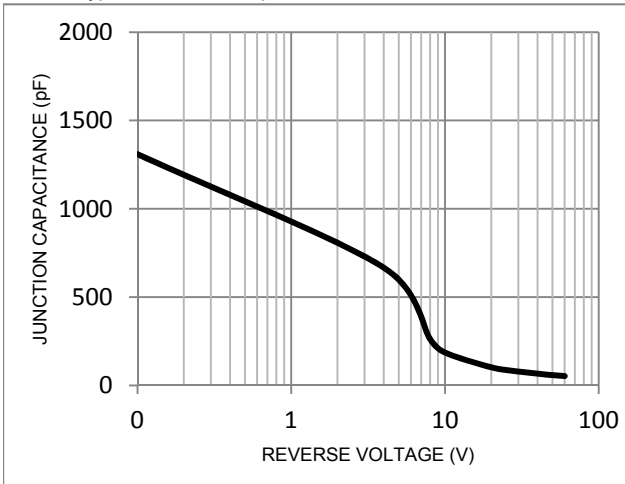

Package Outline Dimensions

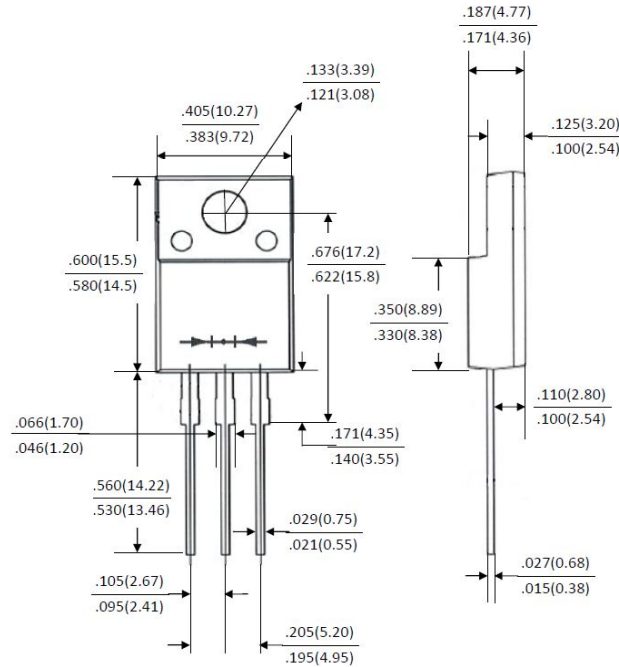

ITO-220AB

Dimensions in inches and (millimeters)

Marking Information

