



EBRT10L60C



Excellent Schottky Barrier Rectifiers



DO-214AB(SMC)

Primary Characteristics		
I_F	10	A
V_{RRM}	60	V
I_{FSM}	200	A
V_F	0.52	V
$T_J \text{ max}$	150	°C

Features
<ul style="list-style-type: none"> • Low profile package • Ideal for automated placement • Guard Ring for over voltage protection • Low forward voltage drop • Component in accordance to RoHS 2002/95/EC

Mechanical Data
• Case: DO-214AB (SMC)
• Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0
• Terminals: Lead Free Plating (Tin Finish). Solderable per MIL-STD-202, Method 208
• Polarity: Cathode Band
• Weight: 0.231 grams (approximate)

Ordering Information			
Part No.	Remark	Package	Packing
EBRT10L60C	General	SMC	3000 / Tape & Reel
EBRT10L60C-H	Halogen Free		
EBRT10L60C-Q	AEC-Q101 qualified		

Maximum Ratings (TA=25°C unless otherwise noted)			
PARAMETER	SYMBOL	EBRT10L60C	UNIT
Maximum repetitive peak reverse voltage	V_{RRM}	60	V
Maximum RMS voltage	V_{RMS}	42	V
Maximum DC blocking voltage	V_{DC}	60	V
Maximum average forward rectified current	I_F	10	A
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load	I_{FSM}	200	A
Maximum Instantaneous Forward Voltage IF=2A @ 25°C IF=10A @ 25°C	V_F	0.34 Typ. 0.52 Max.	V
Maximum DC Reverse Current @ TA=25°C at Rated DC Blocking Voltage @ TA=100°C	I_R	0.5 10	mA
Typical Junction Capacitance(NOTE1)	C_j	730	pF
Typical Thermal Resistance	$R_{\theta JC}$	10	°C/W
Operating Temperature Range	T_J	-55 to +150	°C
Storage Temperature Range	T_{STG}	-55 to +150	°C
Marking Code		T10L60C、10L60C	

NOTES:

1. Measured at 1.0MHZ and applied reverse voltage of 4.0V DC



Excellent Schottky Barrier Rectifiers

Rating and Characteristics Curves

FIG. 1-Typical Forward Current Derating Curve

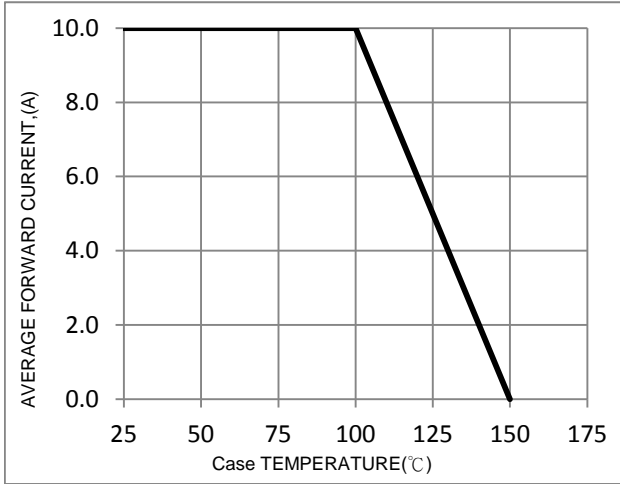


FIG. 2-Typical Forward Characteristics

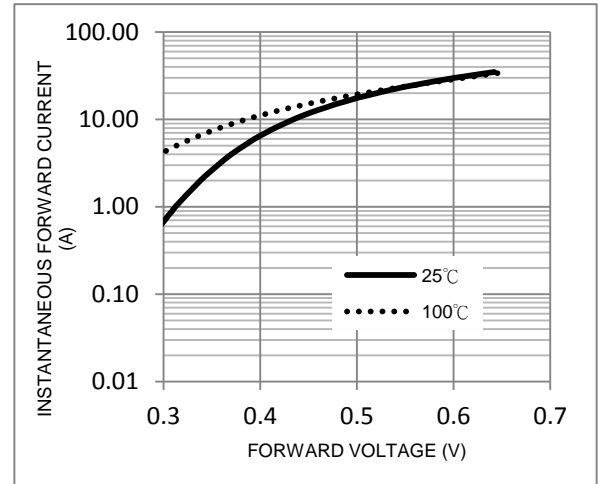


FIG. 3-Maximum Non-Repetitive Forward Surge Current

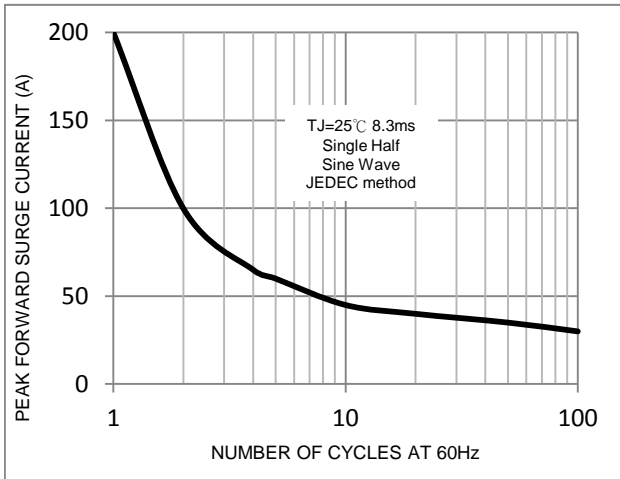


FIG. 4-Typical Reverse Characteristics


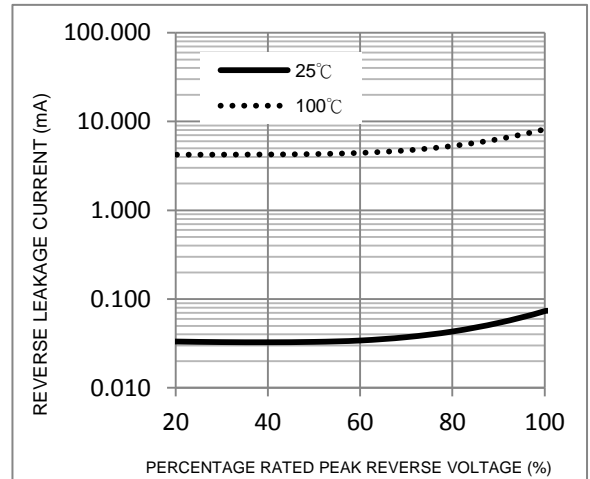



FIG. 5-Typical Junction Capacitance



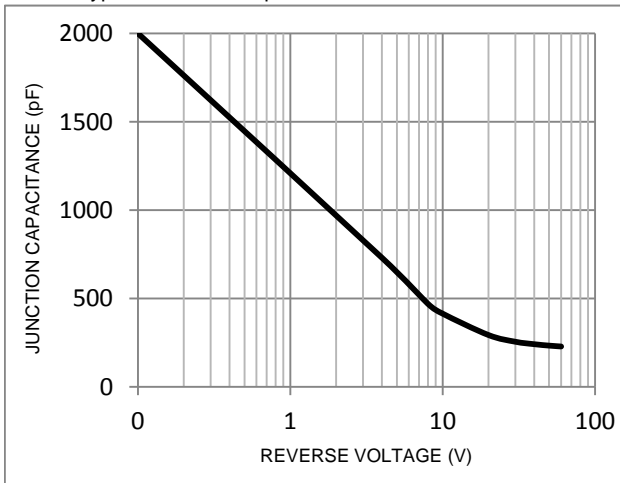

Excellent Schottky Barrier Rectifiers


Package Outline Dimensions

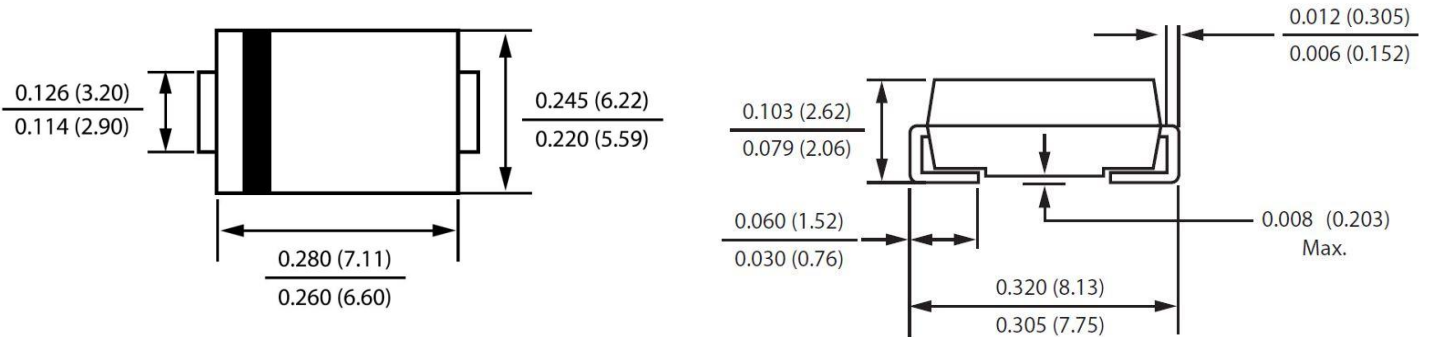

DO-214AB(SMC)


Dimensions in inches and (millimeters)

Marking Information

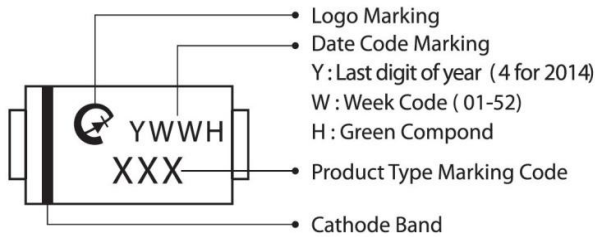

Suggested Pad Layout

Dimension	Outline	SMC (DO-214AB)
A		9.40
B		4.40
C		3.30
D		2.50
E		6.80

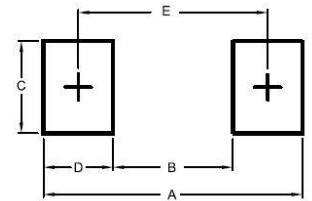

Tape & Reel Specification

ITEM	SYMBOL	SMC (mm)	
		DO-214AB	
Carrier width	A	6.3(max)	
Carrier length	B	8.6(max)	
Carrier depth	C	2.9(max)	
Sprocket hole	d	1.50±0.1	
Reel outside diameter	D	330±2.0	
Feed hole diameter	D0	13.5±1	
Reel inner diameter	D1	50 (min.)	
Sprocket hole position	E	1.75±0.1	
Punch hole position	F	7.5±0.05	
Sprocket hole pitch	P	8.0±0.1	
Sprocket hole pitch	Po	4.0±0.1	
Embossment center	P1	2.0±0.05	
Overall tape thickness	T	0.6 (max)	
Tape width	W	16.0±0.3	
Reel width	W2	22.4 (max)	
Reel width	W1	18.4 (max)	

