



EBRT5E45D



Excellent Schottky Barrier Rectifiers



DO-201AD

| Primary Characteristics | | |
|-------------------------|------|----|
| I_F | 5 | A |
| V_{RRM} | 45 | V |
| I_{FSM} | 100 | A |
| V_F | 0.48 | V |
| T_J max | 150 | °C |

| Features |
|--|
| <ul style="list-style-type: none"> • Guardring for overvoltage protection • Very small conduction losses • Low forward voltage drop • Component in accordance to RoHS 2002/95/EC |

| Mechanical Data |
|--|
| <ul style="list-style-type: none"> • Cases: DO-201AD • Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0 • Terminals: Lead free Plating (Tin Finish) Solderable per MIL-STD-202, Method 208 • Polarity: Cathode Band • Weight: 1.071 grams (approximate) |

| Ordering Information | | | |
|----------------------|--------------|----------|-----------------|
| Part No. | Remark | Package | Packing |
| EBRT5E45D | General | DO-201AD | 1200 / Ammo Box |
| EBRT5E45D-H | Halogen Free | | |

| Maximum Ratings (TA=25°C unless otherwise noted) | | | |
|--|-----------------|-------------------------------------|------|
| PARAMETER | SYMBOL | EBRT5E45D | UNIT |
| Maximum repetitive peak reverse voltage | V_{RRM} | 45 | V |
| Maximum RMS voltage | V_{RMS} | 31.5 | V |
| Maximum DC blocking voltage | V_{DC} | 45 | V |
| Maximum average forward rectified current | I_F | 5.0 | A |
| Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load | I_{FSM} | 100.0 | A |
| Maximum Instantaneous Forward Voltage IF=2A @ 25°C IF=5A @ 25°C IF=5A @ 125°C | V_F | 0.37 Typ. 0.48 Max. 0.40 Max. | V |
| Maximum DC Reverse Current @ TA=25°C at Rated DC Blocking Voltage @ TA=125°C | I_R | 0.5 15 | mA |
| Typical Junction Capacitance(NOTE1) | C_j | 1,000 | pF |
| Typical Thermal Resistance | $R_{\theta JC}$ | 20 | °C/W |
| Operating Temperature Range | T_J | -55 to +150 | °C |
| Storage Temperature Range | T_{STG} | -55 to +150 | °C |
| Marking Code | | T5E45D、5E45D | |

NOTES:

1. Measured at 1.0MHZ and applied reverse voltage of 4.0V DC



Excellent Schottky Barrier Rectifiers

Rating and Characteristics Curves

FIG. 1-Typical Forward Current Derating Curve

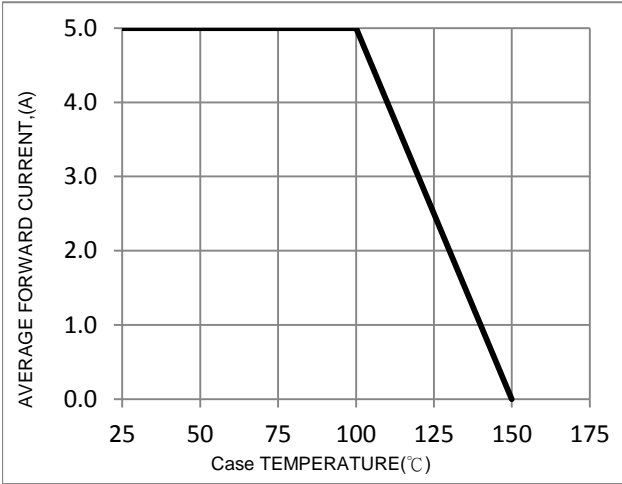


FIG. 2-Typical Forward Characteristics

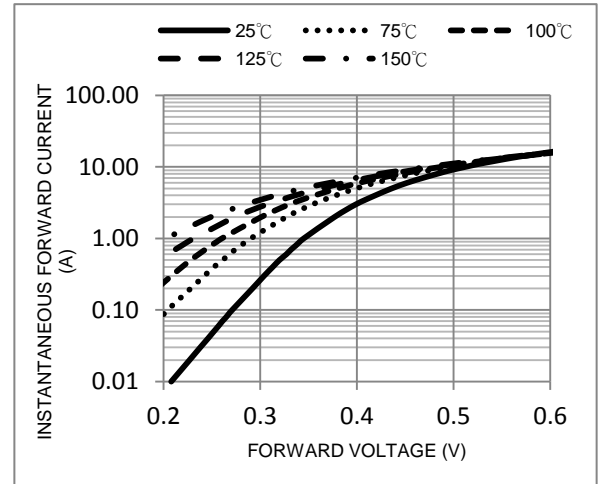


FIG. 3-Maximum Non-Repetitive Forward Surge Current

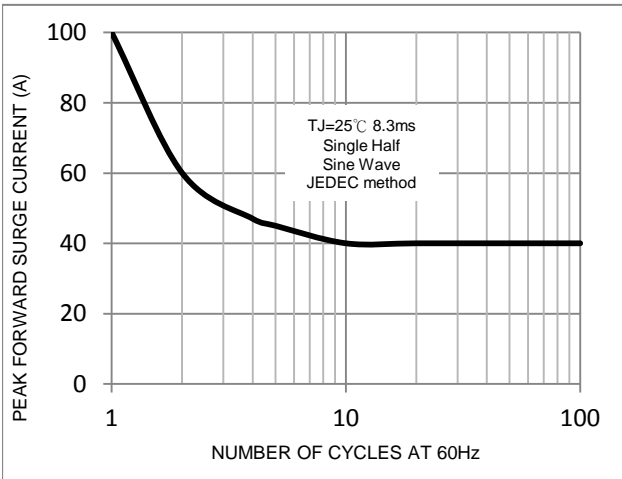


FIG. 4-Typical Reverse Characteristics



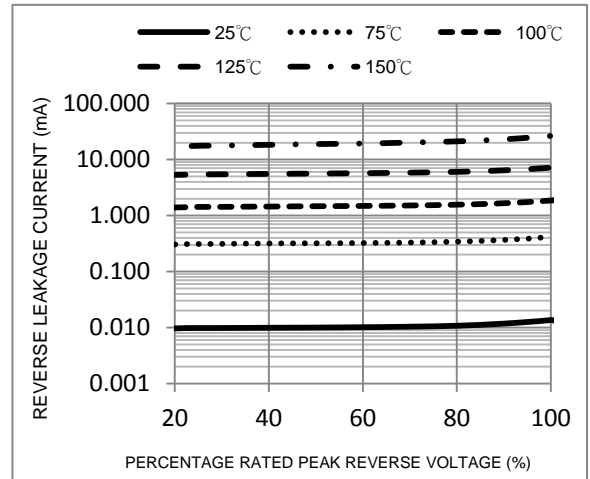


FIG. 5-Typical Junction Capacitance



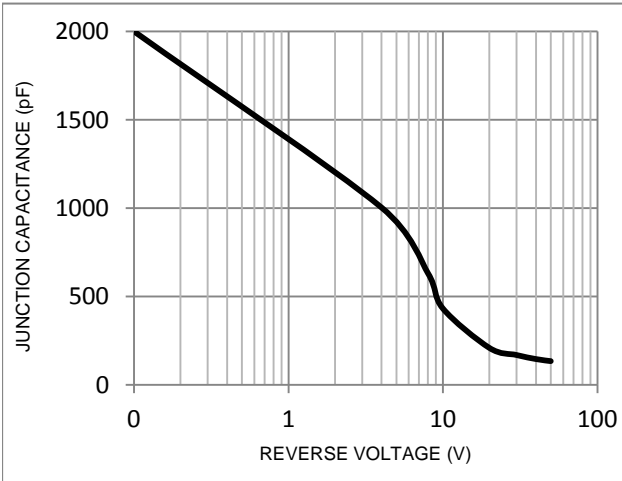


Package Outline Dimensions

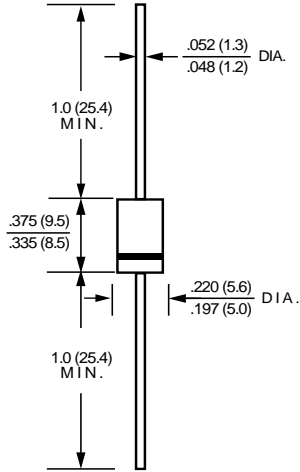

DO-201AD

Dimensions in inches and (millimeters)

Marking Information

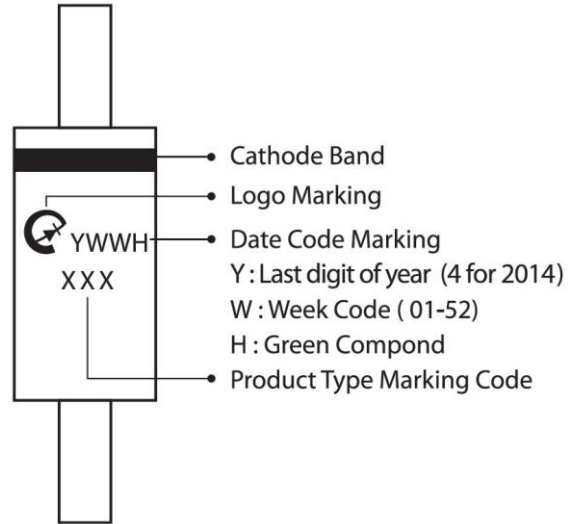

Ammo Box Packing

| Package | Inner | BOX | Inner Box | Carton | Carton Size | Gross Weight |
|----------------------|-------|-------|------------|--------|-------------|--------------|
| | Pack | (EA) | (mm) | (EA) | (mm) | (Kg)-Approx. |
| DO-201AD(DO-27)-52mm | Reel | 1,200 | 255x75x150 | 12000 | 440x280x335 | 16 |