

4 PIN DIP VERY HIGH ISOLATION VOLTAGE PHOTOCOUPLER CNY64 series, CNY65 series




CNY64



CNY65

Schematic



Pin Configuration

1. Anode
2. Cathode
3. Emitter
4. Collector

Features:

- High Voltage , $BV_{CEO}=80V$ (min.)
- Operating temperature up to $+85^{\circ}C$
- High isolation voltage between input and output, $V_{iso} = 8200 V_{rms}$
- Rated recurring peak voltage (repetitive), $V_{ORM} = 1000 VRMS$
- Creepage current resistance according to VDE 0303/IEC 60112 comparative tracking index: $CTI \geq 200$
- Thickness through insulation $\geq 3mm$
- Pb free and RoHS compliant.
- CUL approved (No. E214129)
- VDE approved (No. 40027351)
- FIMKO approved (No. 25464)

Description

The CNY64 and CNY65 series contains an infrared emitting diode optically coupled to a phototransistor. These devices are packaged in an 4-pin DIP package and providing a distance between input and output for highest safety requirement of $>3mm$.

Applications

- Switch mode power supply
 - Line receiver
 - Computer peripheral interface
 - Microprocessor system interface
 - Circuits for safe protective separation against electrical shock according to safety class II (reinforced isolation):
 - for appl. class I - IV at mains voltage $\leq 300 V$
 - for appl. class I - IV at mains voltage $\leq 600 V$
 - for appl. class I - III at mains voltage $\leq 1000 V$
- according to DIN EN 60747-5-5.

Absolute Maximum Ratings (Ta=25°C)

	Parameter	Symbol	Rating	Unit
Input	Forward current	I _F	75	mA
	Peak forward current (<10μs)	I _{FM}	1.5	A
	Reverse voltage	V _R	5	V
	Power dissipation	P _D	120	mW
Output	Collector power dissipation	P _C	150	mW
	Collector current	I _C	50	mA
	Collector-Emitter voltage	V _{CEO}	80	V
	Emitter-Collector voltage	V _{ECO}	7	V
Total Power Dissipation		P _{TOT}	250	mW
Isolation Voltage*1		V _{ISO}	8200	V rms
Operating Temperature		T _{OPR}	-55 to 85	°C
Storage Temperature		T _{STG}	-55 to 100	°C
Soldering Temperature*2		T _{SOL}	260	°C

Notes:

*1 AC for 1 minute, R.H.= 40 ~ 60% R.H. In this test, pins 1, 2 are shorted together, and pins 3, 4 are shorted together.

*2 2mm from case, <10 seconds

Electro-Optical Characteristics (Ta=25°C unless specified otherwise)

Input

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Forward voltage	V _F	-	1.6	2.0	V	I _F = 50mA
Reverse current	I _R	-	-	10	μA	V _R = 5V
Input capacitance	C _{in}	-	-	100	pF	V = 0, f = 1MHz

Output

Parameter	Symbol	Min	Typ.	Max.	Unit	Condition
Collector-Emitter dark current	I _{CEO}	-	-	200	nA	V _{CE} = 20V, I _F =0mA
Collector-Emitter breakdown voltage	BV _{CEO}	80	-	-	V	I _C = 1mA
Emitter-Collector breakdown voltage	BV _{ECO}	7	-	-	V	I _E = 0.1mA
Collector-Emitter capacitance	C _{CE}	-	-	50	pF	V _{CE} = 0V, f = 1MHz

Transfer Characteristics

Parameter	Symbol	Min	Typ.	Max.	Unit	Condition
Current Transfer ratio	CNY64	50	-	300	%	I _F = 5mA, V _{CE} = 5V
	CNY65		-	150		
	CNY64A	63	-	150		
	CNY65A	63	-	125		
	CNY64B	100	-	200		
CNY65B	-	-	-	-		
Collector-Emitter saturation voltage	V _{CE(sat)}	-	-	0.3	V	I _F = 10mA, I _C = 1mA
Isolation resistance	R _{IO}	10 ¹¹	-	-	Ω	V _{IO} = 500Vdc, 40~60% R.H.
Coupling capacitance	C _{IO}	-	0.3	-	pF	V _{IO} = 0, f = 1MHz
Turn-on time	T _{on}	-	6	18	μs	V _{CC} = 5V, I _C = 5mA, R _L = 100Ω
Turn-off time	T _{off}	-	7	18		
Rise time	t _r	-	3	18		
Fall time	t _f	-	5	18		

* Typical values at T_a = 25°C

Typical Electro-Optical Characteristics Curves

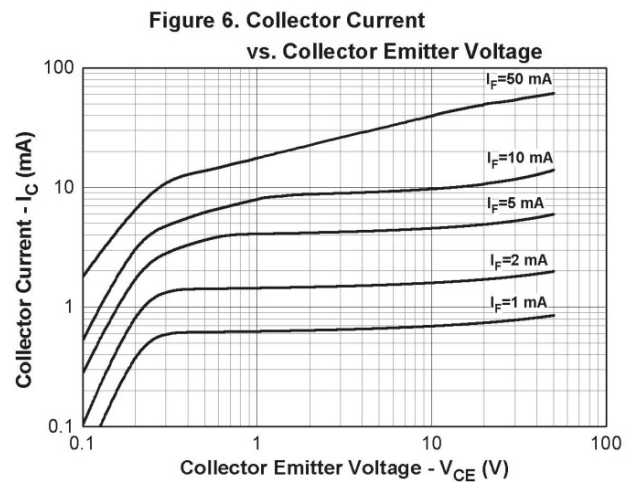
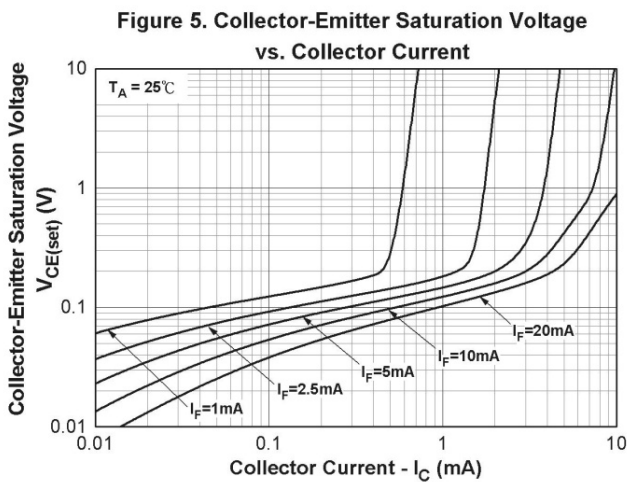
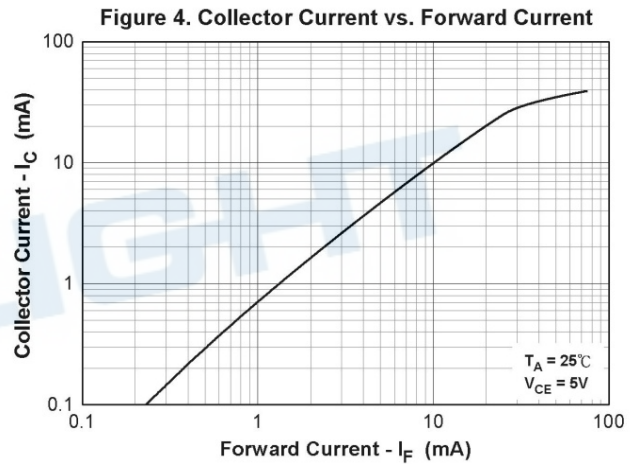
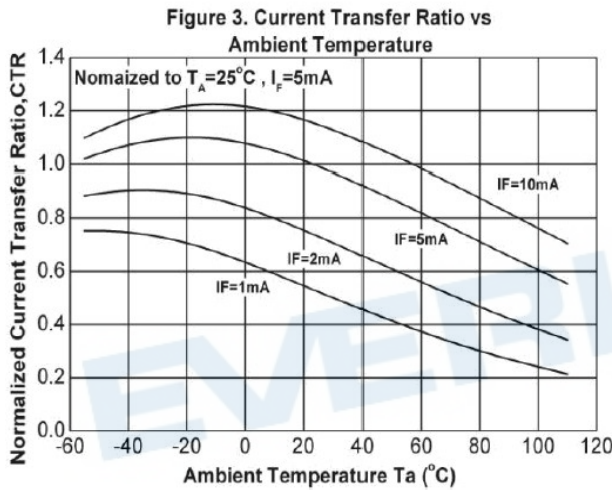
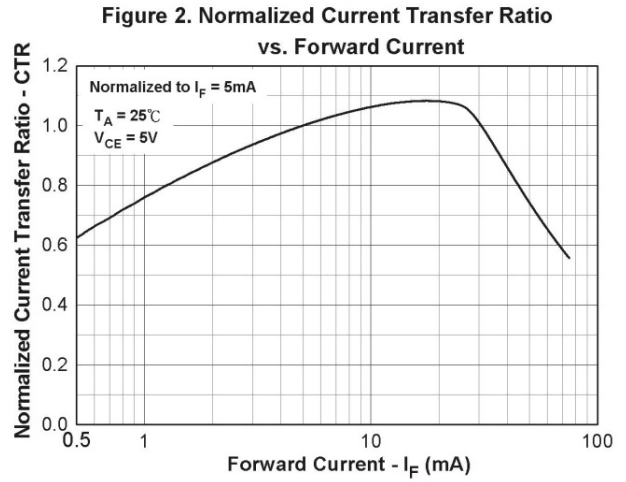
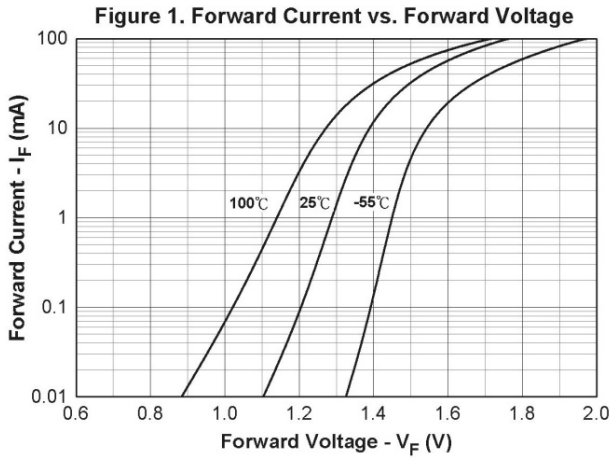


Figure.7 Collector Dark Current vs. Ambient Temperature

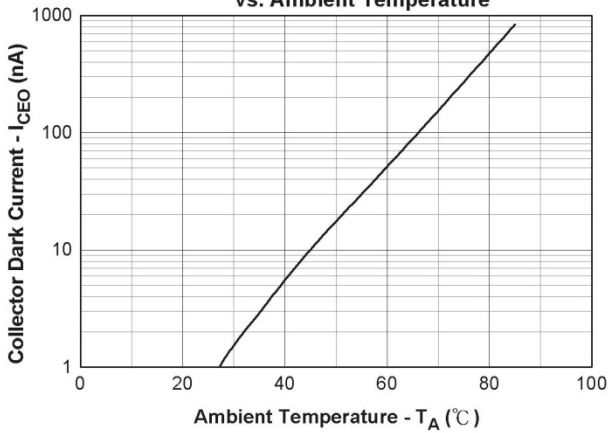


Figure 8. Turn on/off Time vs. Forward Current

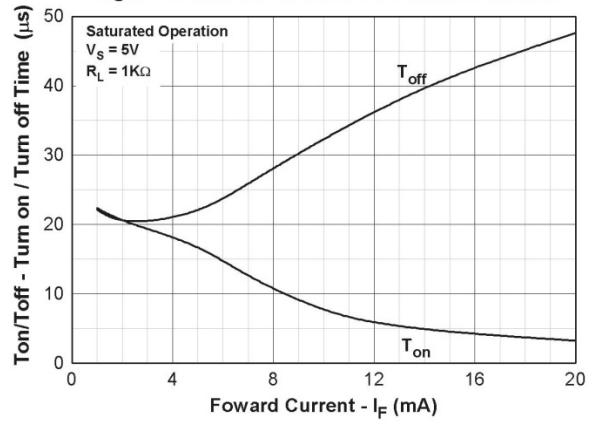


Figure 9. Turn on/off Time vs. Collector Current

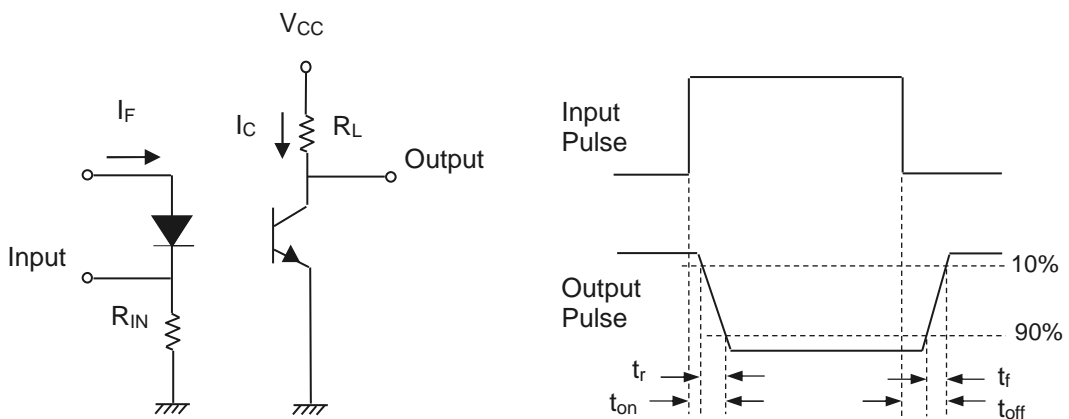
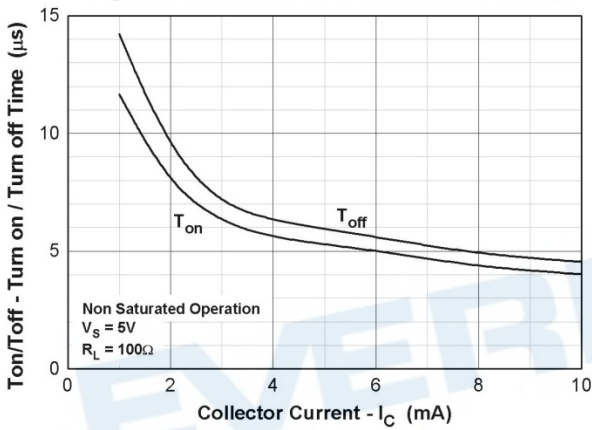


Figure 10. Switching Time Test Circuit & Waveforms

Order Information

Part Number

CNY64(Y)-V
or
CNY65(Y)-V


Note

- Y = CTR Rank (A, B, or none)
- V = VDE safety (optional).


Option	Description	Packing quantity
CNY64	Standard	60 units per tube
CNY64-V	Standard + VDE	60 units per tube
CNY65	Standard	45 units per tube
CNY65-V	Standard + VDE	45 units per tube

Package Dimension (Dimensions in mm)


CNY64

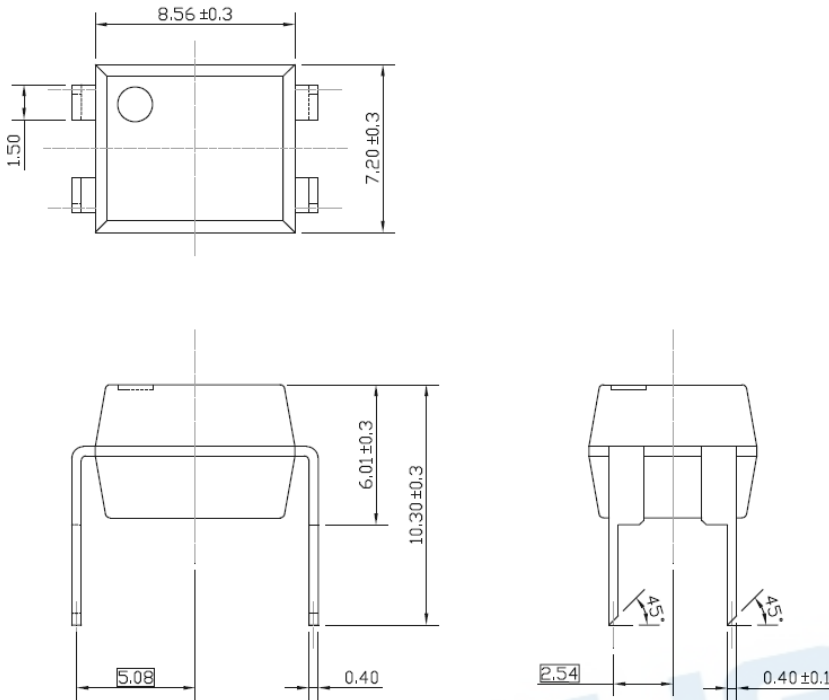

CNY65

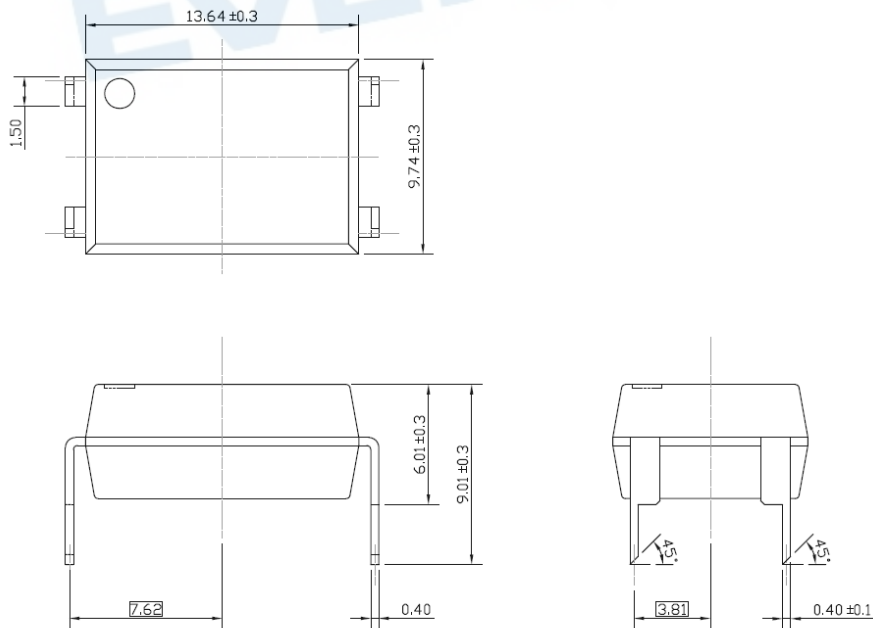

Device Marking



Notes

EL	denotes Everlight
CNY64	denotes Part no.
R	denotes CTR rank (A or B)
Y	denotes 1 digit Year code
WW	denotes 2 digit Week code
V	denotes VDE safety (optional)

EVERLIGHT

DISCLAIMER

1. Above specification may be changed without notice. EVERLIGHT will reserve authority on material change for above specification.
2. The graphs shown in this datasheet are representing typical data only and do not show guaranteed values.
3. When using this product, please observe the absolute maximum ratings and the instructions for use outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
4. These specification sheets include materials protected under copyright of EVERLIGHT. Reproduction in any form is prohibited without the specific consent of EVERLIGHT.
5. This product is not intended to be used for military, aircraft, automotive, medical, life sustaining or life saving applications or any other application which can result in human injury or death. Please contact authorized Everlight sales agent for special application request.
6. Statements regarding the suitability of products for certain types of applications are based on Everlight's knowledge of typical requirements that are often placed on Everlight products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Everlight's terms and conditions of purchase, including but not limited to the warranty expressed therein.