





# SM1620CD2 thru SM16200CD2

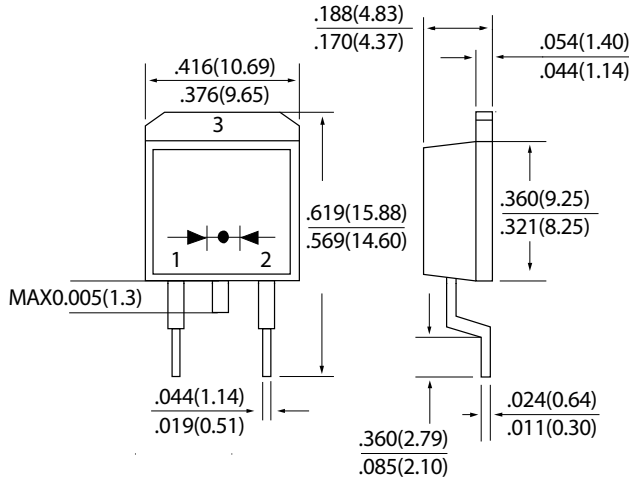

## Schottky Barrier Rectifiers



### D2PAK

Dimensions in inches and (millimeters)

Ordering Information	
Part Number	Remark
SM16xxCD2	General
SM16xxCD2-H	Halogen Free
SM16xxCD2-Q	Automotive

PRIMARY CHARACTERISTICS	
$I_F$	16A
$V_{RRM}$	20~200V
$I_{FSM}$	125A
$V_F$	0.55V, 0.70V, 0.85V, 0.92V
$T_J$ max	125°C , 150°C

### Features

- Guard Ring for over voltage Protection
- High forward surge capability
- High frequency operation
- Component in accordance to RoHS 2002/95/EC
- AEC-Q101 qualified

### Mechanical Data

- Case: D2PAK
- Case Material: Molded Plastic, UL Flammability Classification Rating 94V-0
- Terminals: Matte Tin Finish annealed over copper Leadframe. Solderable per MIL-STD-202
- Weight: 1.541 grams (approximate)

### MAXIMUM RATINGS (TA=25°C unless otherwise noted)

PARAMETER	SYMBOL	SM 1620 CD2	SM 1630 CD2	SM 1640 CD2	SM 1650 CD2	SM 1660 CD2	SM 1680 CD2	SM 16100 CD2	SM 16150 CD2	SM 16200 CD2	UNIT	
Maximum repetitive peak reverse voltage	$V_{RRM}$	20	30	40	50	60	80	100	150	200	V	
Maximum RMS voltage	$V_{RMS}$	14	21	28	35	42	56	70	105	140	V	
Maximum DC blocking voltage	$V_{DC}$	20	30	40	50	60	80	100	150	200	V	
Maximum average forward rectified current (Total) (Per Leg)	$I_F$	16 8									A	
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load	$I_{FSM}$	125.0									A	
Maximum Instantaneous $I_F=8A$ @ 25°C Forward Voltage $I_F=8A$ @ 100°C	$V_F$	0.55 0.52		0.70 0.60		0.85 0.70		0.92 0.80		V		
Maximum DC Reverse Current @ $T_c=25^\circ C$ at Rated DC Blocking Voltage @ $T_c=100^\circ C$	$I_R$	0.5 30					0.2 10				mA	
Typical Junction Capacitance(NOTE1)	$C_j$	450			350		250		200 150		pF	
Typical Thermal Resistance	$R_{\theta JC}$	3									°C/W	
Operating Temperature Range	$T_J$	-55 to +125					-55 to +150					°C
Storage Temperature Range	$T_{STG}$	-55 to +150									°C	

NOTES:1. Measured at 1.0MHZ and applied reverse voltage of 4.0V DC



# SM1620CD2 thru SM16200CD2



## Schottky Barrier Rectifiers

FIG. 1-TYPICAL FORWARD CURRENT DERATING CURVE

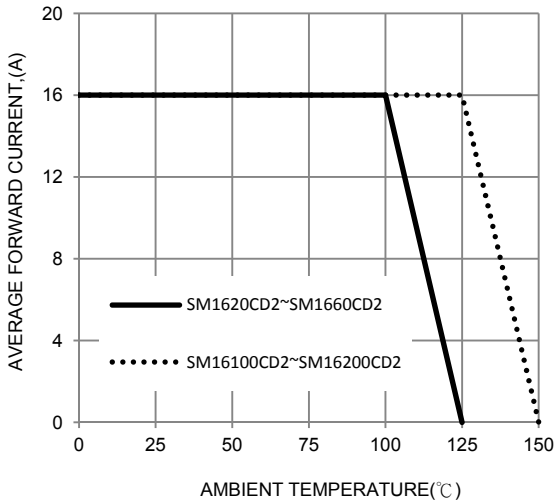


FIG. 2-TYPICAL FORWARD CHARACTERISTICS

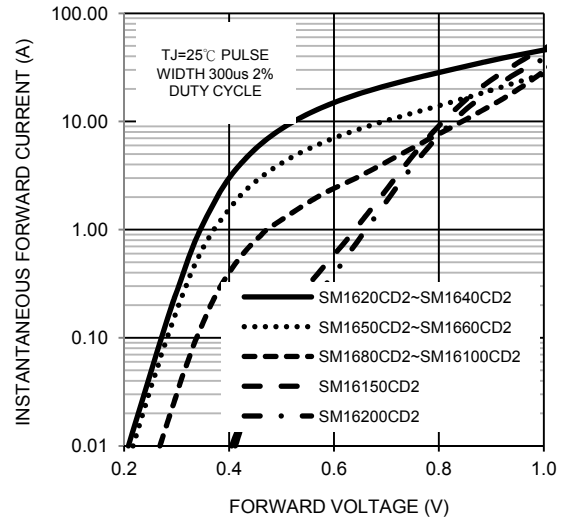


FIG. 3-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

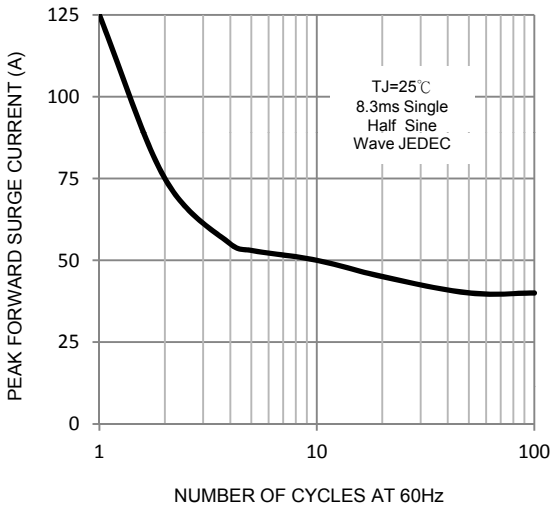


FIG. 4-TYPICAL REVERSE CHARACTERISTICS

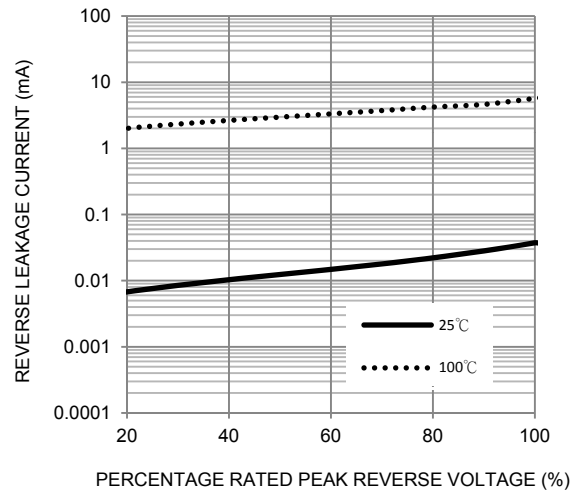


FIG. 5-TYPICAL JUNCTION CAPACITANCE

