




SP1520S thru SP15200S



Schottky Barrier Rectifiers

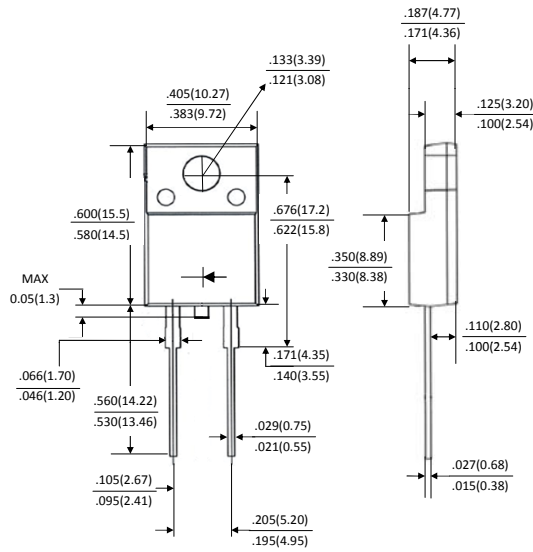

ITO-220AC

Dimensions in inches and (millimeters)



Ordering Information	
Part Number	Remark
SP15xxS	General
SP15xxS-H	Halogen Free
SP15xxS-Q	Automotive

PRIMARY CHARACTERISTICS	
I_F	15A
V_{RRM}	20~200V
I_{FSM}	200A
V_F	0.55V, 0.70V, 0.85V, 0.92V
T_J max	125°C , 150°C

Features

- Guard Ring for over voltage Protection
- High forward surge capability
- High frequency operation
- Component in accordance to RoHS 2002/95/EC
- AEC-Q101 qualified

Mechanical Date

- Case: ITO-220AC
- Case Material: Molded Plastic, UL Flammability Classification Rating 94V-0
- Terminals: Matte Tin Finish annealed over copper Leadframe. Solderable per MIL-STD-202
- Weight: 1.579 grams (approximate)

MAXIMUM RATINGS (TA=25°C unless otherwise noted)

PARAMETER	SYMBOL	SP15 20S	SP15 30S	SP15 40S	SP15 50S	SP15 60S	SP15 80S	SP15 100S	SP15 150S	SP15 200S	UNIT	
Maximum repetitive peak reverse voltage	V_{RRM}	20	30	40	50	60	80	100	150	200	V	
Maximum RMS voltage	V_{RMS}	14	21	28	35	42	56	70	105	140	V	
Maximum DC blocking voltage	V_{DC}	20	30	40	50	60	80	100	150	200	V	
Maximum average forward rectified current	I_F	15.0									A	
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load	I_{FSM}	200.0									A	
Maximum Instantaneous Forward Voltage $I_F=15A @ 25^\circ C$	V_F	0.55			0.70		0.85		0.92		V	
Maximum DC Reverse Current @ $T_c=25^\circ C$ at Rated DC Blocking Voltage @ $T_c=100^\circ C$	I_R	0.5 30				0.2 20				mA		
Typical Junction Capacitance(NOTE1)	C_j	700			720		950		300		pF	
Typical Thermal Resistance	$R_{\theta JC}$	3									°C/W	
Operating Temperature Range	T_J	-55 to +125					-55 to +150					°C
Storage Temperature Range	T_{STG}	-55 to +150									°C	

NOTES:1.Measured at 1.0MHZ and applied reverse voltage of 4.0V DC



Schottky Barrier Rectifiers

FIG. 1-TYPICAL FORWARD CURRENT DERATING CURVE

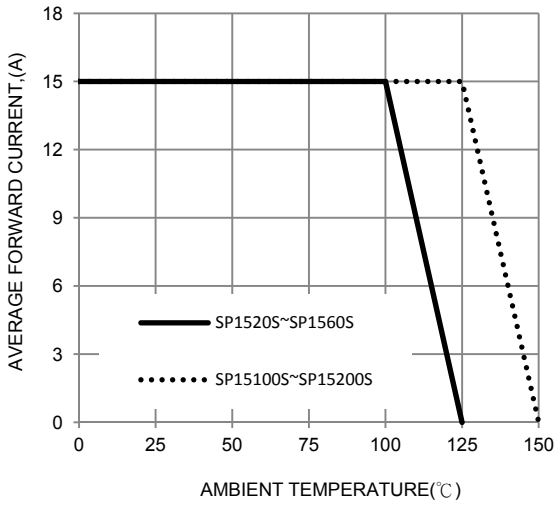


FIG. 2-TYPICAL FORWARD CHARACTERISTICS

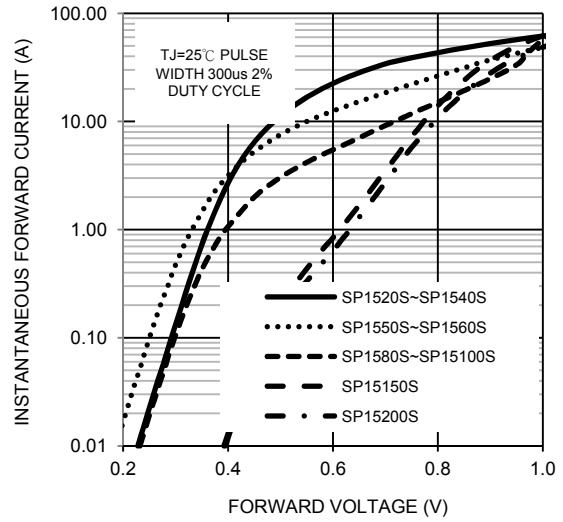


FIG. 3-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

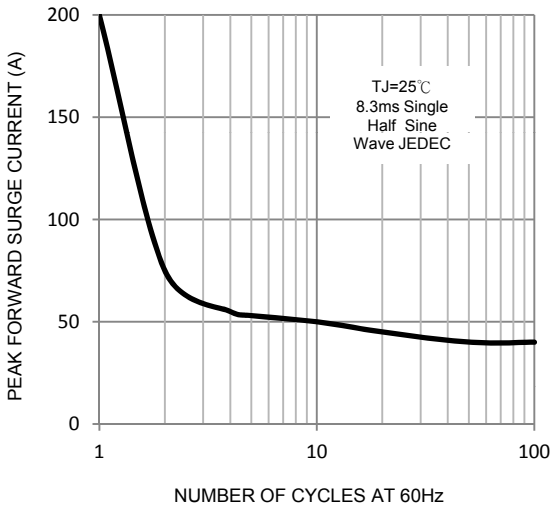


FIG. 4-TYPICAL REVERSE CHARACTERISTICS

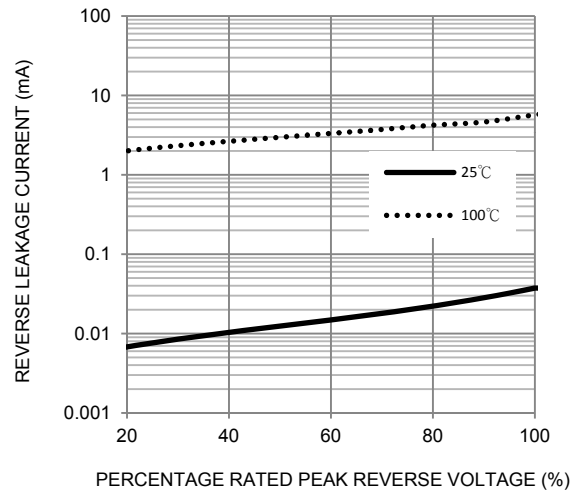


FIG. 5-TYPICAL JUNCTION CAPACITANCE

