


THIS DRAWING IS THE EXCLUSIVE PROPERTY OF MARQUARDT. WITHOUT THEIR CONSENT IT MAY NOT BE REPRODUCED OR GIVEN TO THIRD PARTIES.

CONFIDENTIAL

VERTRAULICH

Alle Rechte bei Marquardt, auch fuer den Fall von Schutzrechtsanmeldungen. Jede Verfertigungsbefugnis, wie Kopier- und Weitergaberecht, bei uns.

A	recommended cut-out for snap-in fixing (edge opposite to snap-in direction)	1	2	3	4
			wall thickness	length of cut-out	width of cut-out
			0.75 to 1.25	19.2 -0.1	12.9+0.1
			1.25 to 2	19.4 -0.1	12.9+0.1
		2 to 3	19.8 -0.1	12.9+0.1	

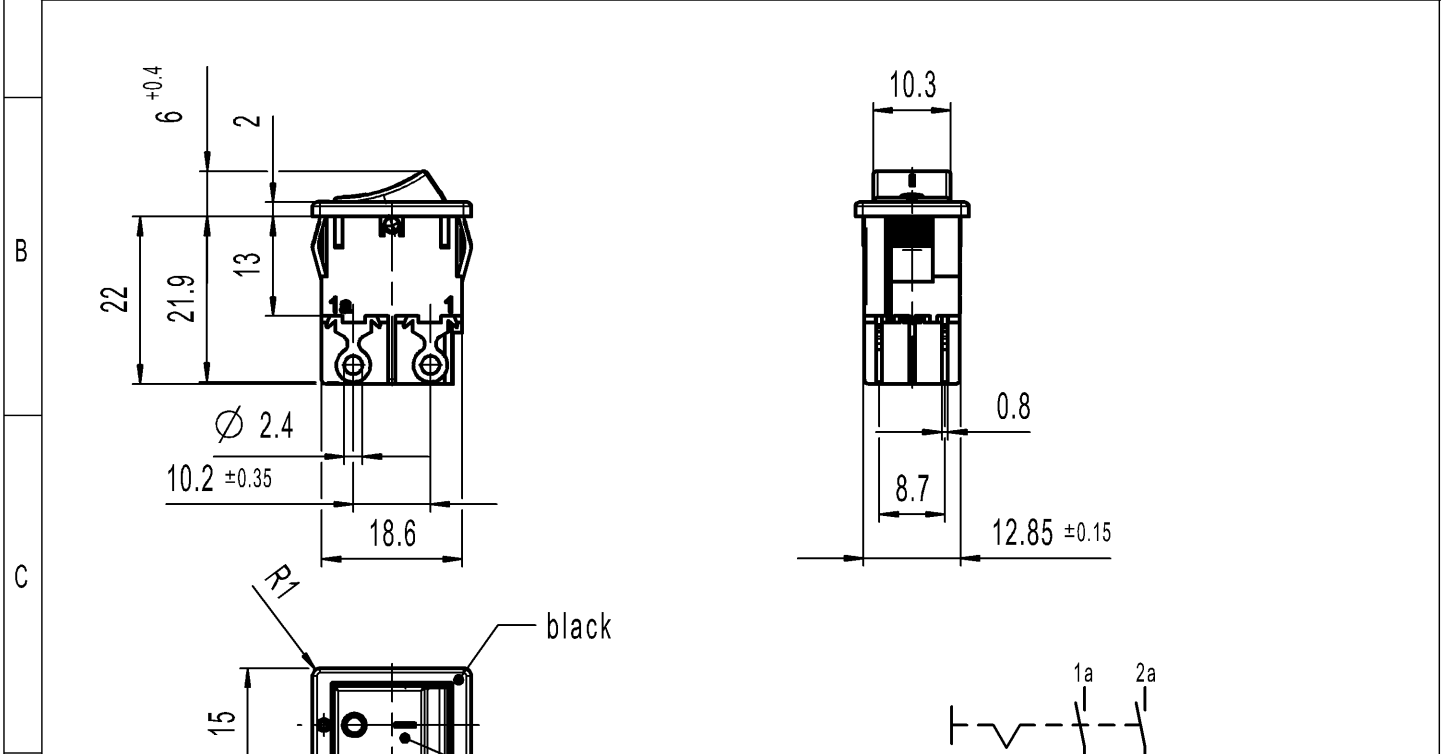

Marking  
 1858.  
 10(10)A 250Vac 5E4  
 16(10)A 250Vac 1E4  
 15 T100/55 c us

DPST  
 Suitable for appliance of class II  
 Protected according to DIN 40 050, IP40  
 G= matching IEC 60335-1:2001 clause 30

Code of manufacture: place/year/week  
 On box: Customer Part No. see variant table  
 G

-	-	0041.1852	1858.0103-XX
Figure	Type	Customer Part No.	Art.No.-PI
Shape and location	Angle $\pm 2^\circ$	Sheet 01	Ident. K
	Edge tolerance	Format DIN A4	Document number 18580103
	Length	Projection	Index j
	Radii	Scale 1:1	Appliance Switch
j	141198	All dimensions are in millimetres	
i	117433	System NX V1872	
h	103593	Replacement of	
g	47886	Zg.gl.Nr.v.01.07.1994	
Index	MEC-No.	Date (YYYY-MM-DD)	Edited by

