



2DTRu45 180x32R

D17-A4 p



**DATA SHEET**

release. c - Revision 05-2016

Voltage	Frequency	Input Power	Input Current	Capacitor	Airflow	Rotation speed	Acoustic level	Direction rotation	Admissible Temperature
V	Hz	W	A	µF	m³/h	RPM	dBA		Min/Max
230	50	133	0,58	4,0	625	2650	62	R	-40°C / +70°C
230	60	188	0,82	4,0	680	2830	64	R	-40°C / +70°C
230	50				367 CFM				-40°F / 158°F
230	60				400 CFM				-40°F / 158°F



dBA : free blowing



NA : not applicable

ErP 2013

NA


ErP 2015

NA

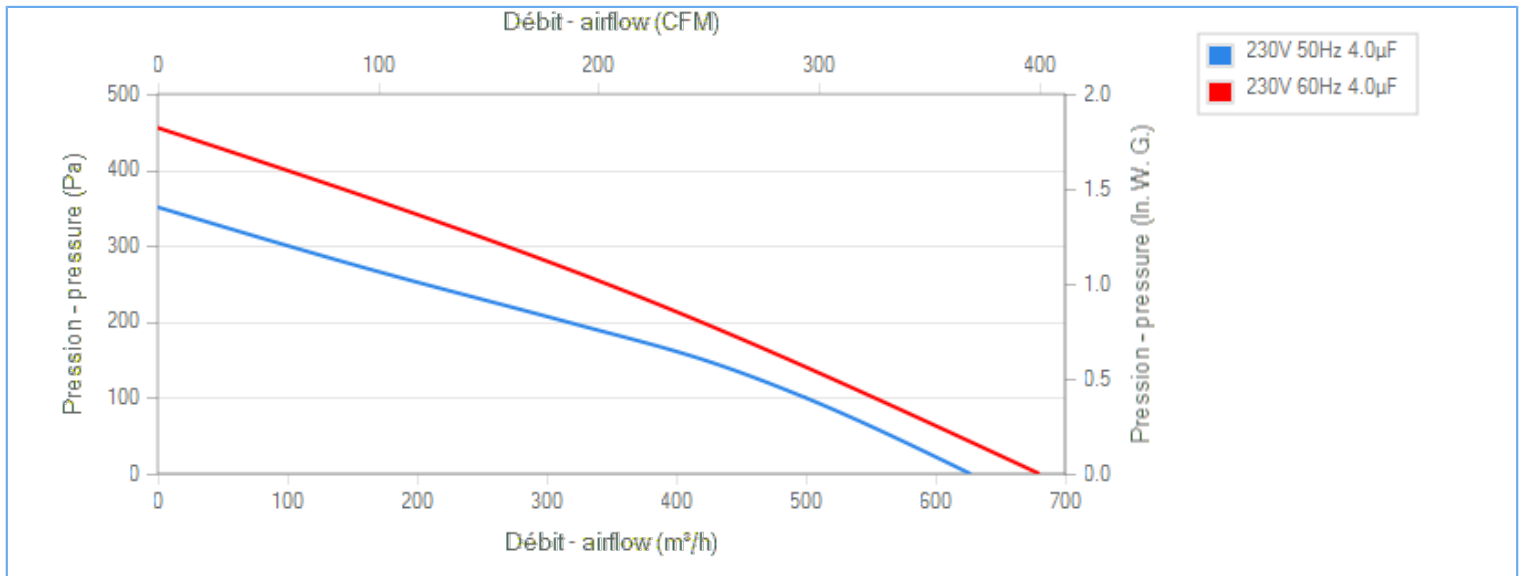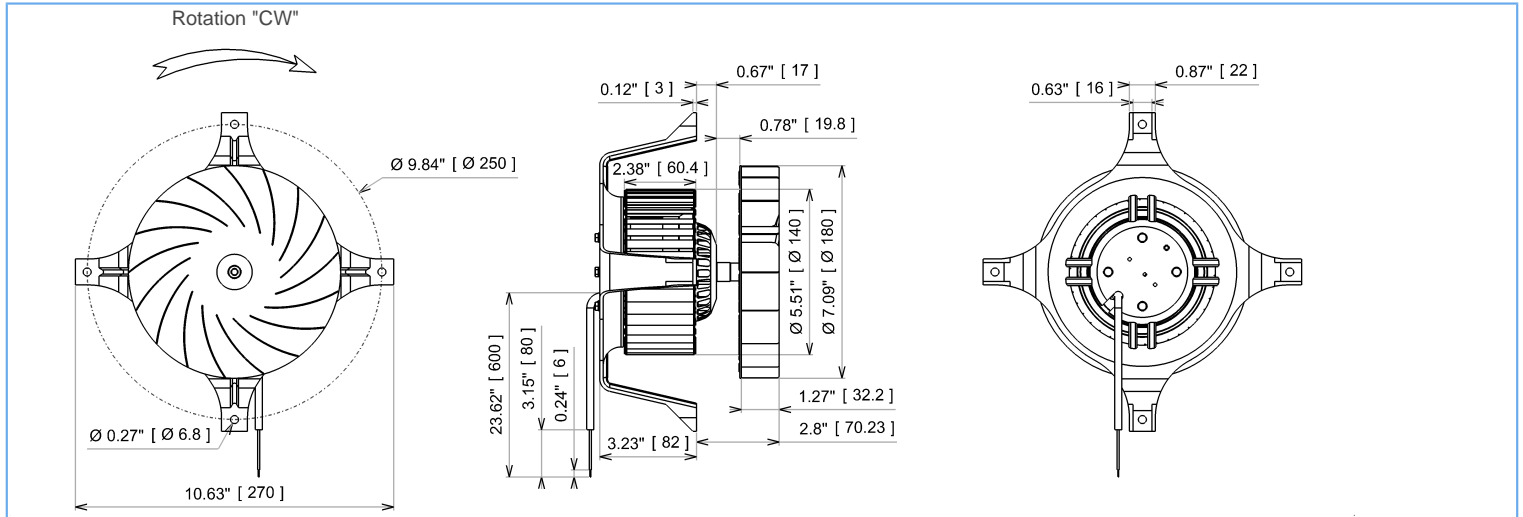

**Description**

- .Weight : 4,0 Kg
- .Ball bearing
- .Class F, thermally protected
- .IP54 protection depending on installation and position as per EN60034-5
- .G2.5 balancing
- .Impeller stainless
- .Rotor : black paint
- .DTR motor prop cast in aluminium
- .Maximum temperature on stainless steel wheel 300°C
- .Motor - UL Recognized component

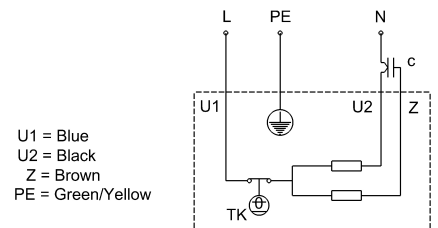

Non contractual document. All specifications are subject to change without prior notice. Picture for information only.



2DTRu45 180x32R

D17-A4 p



# DATA SHEET

release. c - Revision 05-2016

## Data in accordance to ErP directive

Voltage	230	V
Frequency	50	Hz
Power	0,109	kW <sup>(1)</sup>
Airflow	320	m <sup>3</sup> /h <sup>(1)</sup>
Pressure	198	Pa <sup>(1)</sup>
Rotation speed	2787	RPM <sup>(1)</sup>

(1) at optimal efficiency point

ErP directive (EU 2009/125/EC) not applicable :  
Designed specifically where operating temperatures of the gas being moved exceed 100 °C

## Accessories

19220

19220

## Measurement setup

16126 Ouie OJ150 P/DBAF XC

## Documents

Manuel d'utilisation

[www.ecofit.com/site/normes](http://www.ecofit.com/site/normes)

Operating and recycling manual



[www.ecofit.com/anglais/normes](http://www.ecofit.com/anglais/normes)



UL2111 (XEWR2,8)  
N° file E135223  
2RS945



A041865  
2RS945CN

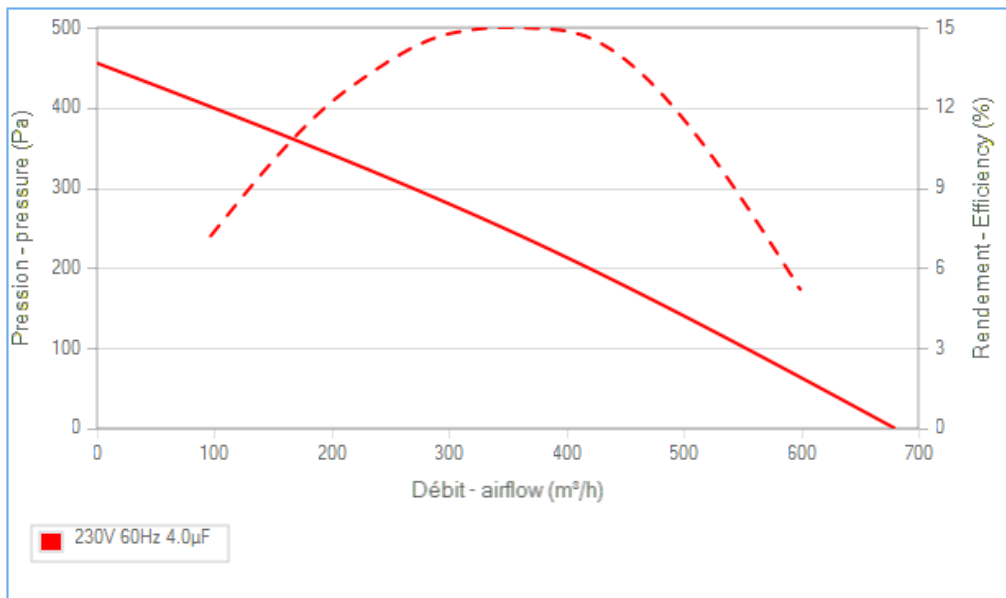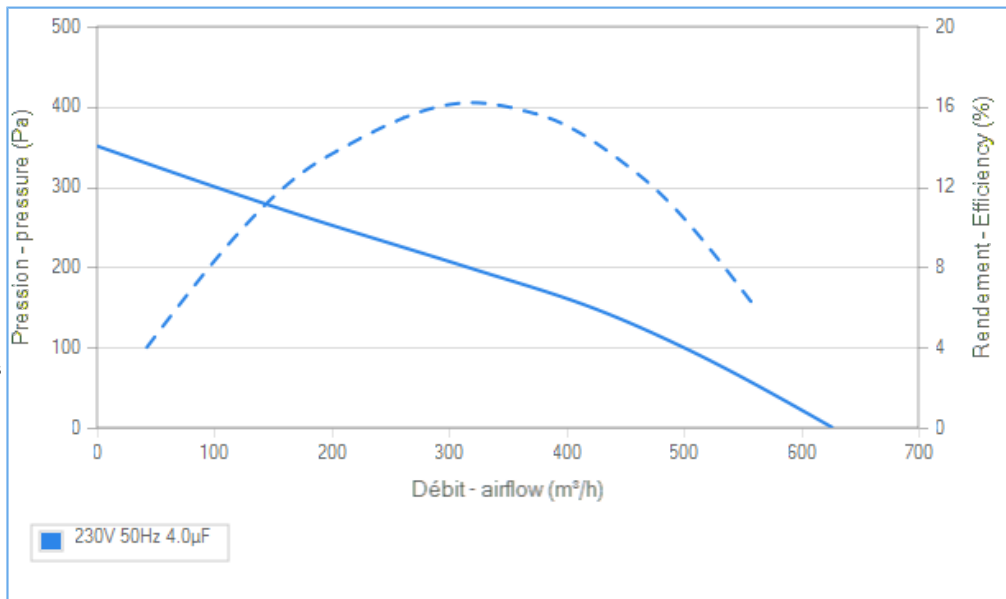

Non contractual document. All specifications are subject to change without prior notice. Picture for information only.