



2RRMu45 250x50R

N13-A5 p




DATA SHEET

release. c - Revision 04-2018

Replace E04-A5

Voltage	Frequency	Input Power	Input Current	Capacitor	Airflow	Rotation speed	Acoustic level	Direction rotation	Admissible Temperature
V	Hz	W	A	μF	m³/h	RPM	dBA	↻	Min/Max
230	50	156	0,68	6,0	1415	2775	71	R	-40°C / +70°C
230	60	230	1,02	6,0	1610	3160	74	R	-40°C / +70°C
230	50				832 CFM				-40°F / 158°F
230	60				947 CFM				-40°F / 158°F





dBA : free blowing

ErP 2013

OK

ErP 2015


OK

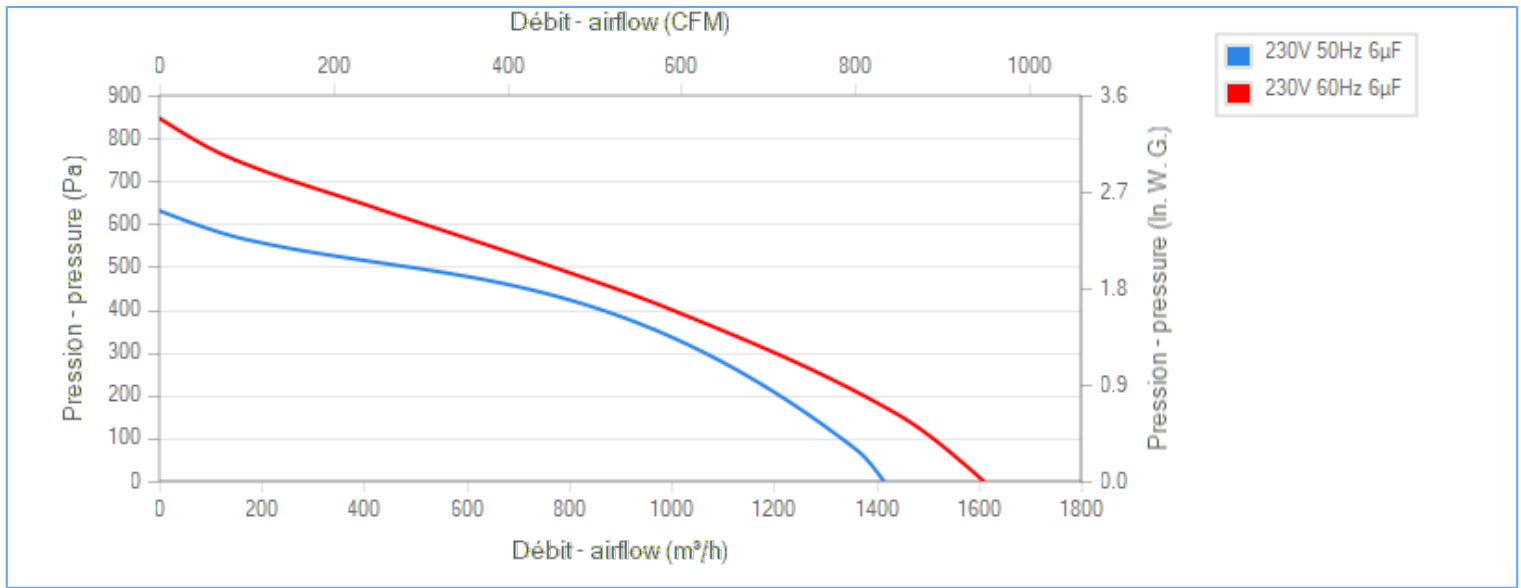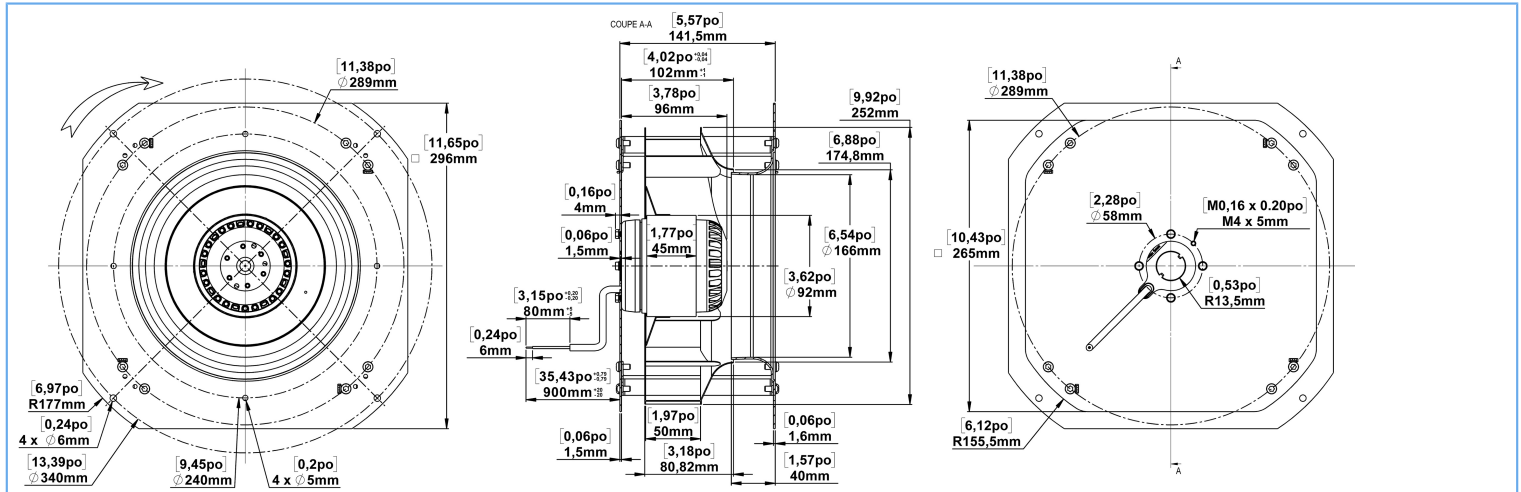

Description

- .Weight : 5,0 Kg
- .Ball bearing
- .Class F, thermally protected
- .IP44 protection depending on installation and position as per EN60034-5
- .G2.5 balancing
- .Rotor : black paint
- .Galvanized steel impeller

U1 = Blue
 U2 = Black
 Z = Brown
 PE = Green/Yellow



Non contractual document. All specifications are subject to change without prior notice. Picture for information only.



2RRMu45 250x50R

N13-A5 p

Replace E04-A5



DATA SHEET

release. c - Revision 04-2018

Data in accordance to ErP directive

Voltage	230	V
Frequency	50	Hz
Power	0,214	kW ⁽¹⁾
Airflow	947	m ³ /h ⁽¹⁾
Pressure	363	Pa ⁽¹⁾
Rotation speed	2623	RPM ⁽¹⁾

(1) at optimal efficiency point

	Actual	Request 2013	Request 2015
Overall efficiency (η)	44,6	40,5	44,5
Efficiency grade	62	58	62
Installation category	A		
Efficiency category	static		
Variable speed drive	No		
Specific ratio	1,00		

Designed for regular application according ErP directive EU 2009/125/EC

Accessories



- 19221
- 19221
- 21360

Measurement setup

- 16234

Documents

- Manuel d'utilisation
www.ecofit.com/site/normes
- Operating and recycling manual
www.ecofit.com/anglais/normes

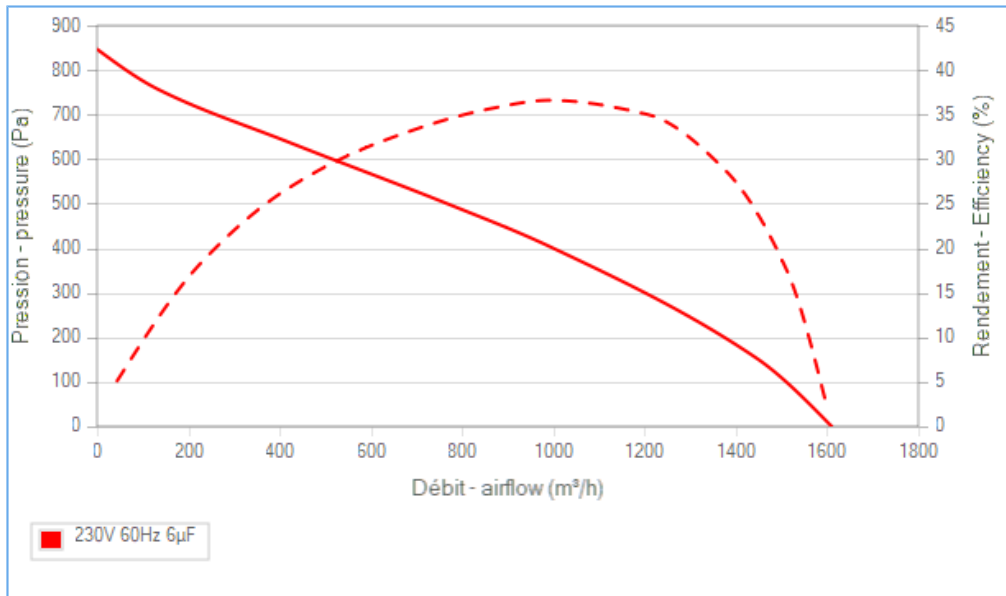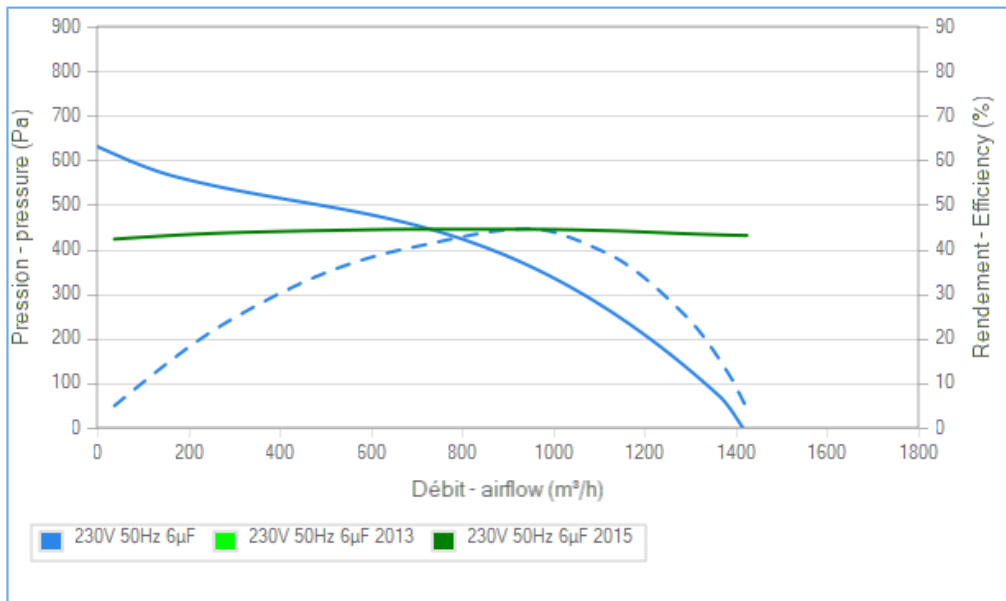

Non contractual document. All specifications are subject to change without prior notice. Picture for information only.



UL2111 (XEW2,8)
N° file E135223
2RS945