




2VGCu25 250A

K18-A5 p

**DATA SHEET**

release. d - Revision 01-2018

Voltage	Frequency	Input Power	Input Current	Capacitor	Airflow	Rotation speed	Acoustic level	Direction rotation	Admissible Temperature	
V	Hz	W	A	µF	m³/h	RPM	dBA	↻	Min/Max	
115	50	106	1,06	12,0	1660	2765	67	R	-40°C / +70°C	
115	60	143	1,25	12,0	1905	2935	71	R	-40°C / +70°C	
115	50	977 CFM						-40°F / 158°F		
115	60	1121 CFM						-40°F / 158°F		





dBA : free blowing

ErP 2013




ErP 2015

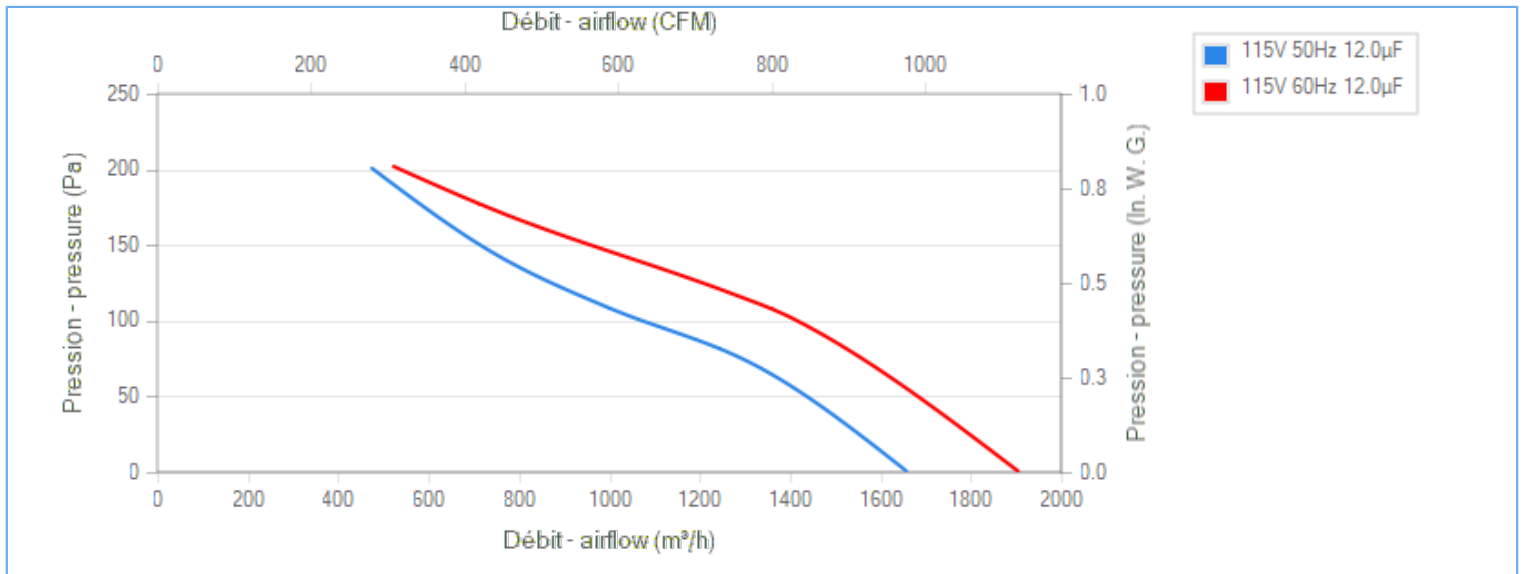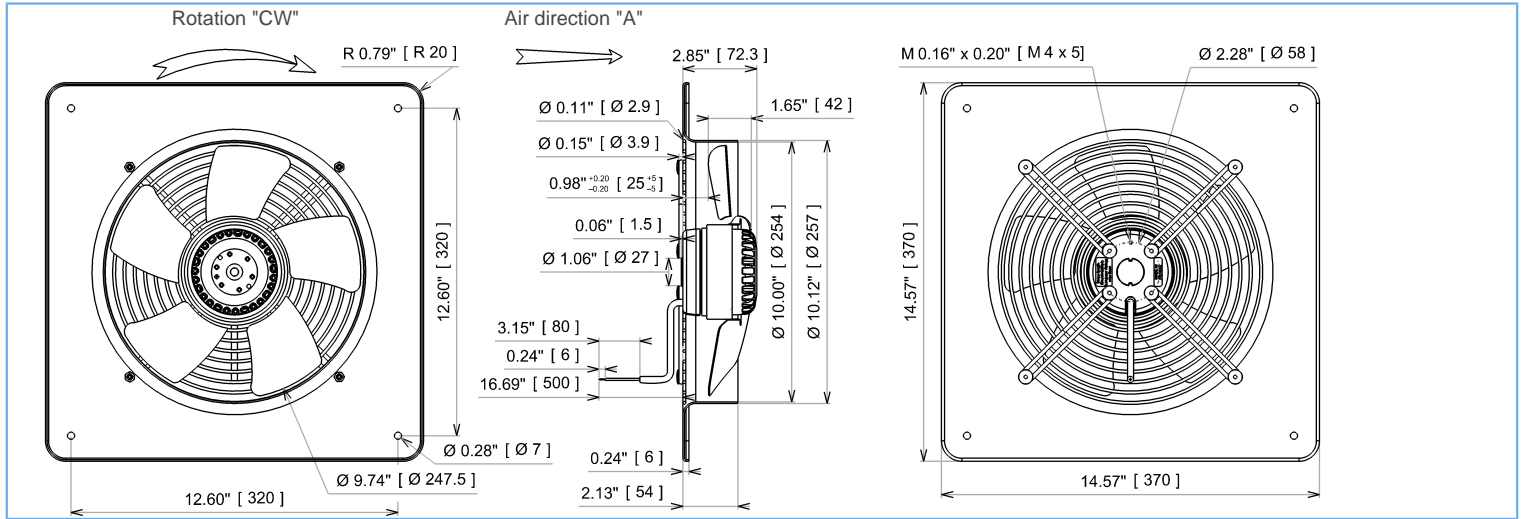

Tested with ECOFIT ring

**Description**

- .Weight : 3,7 Kg
- .Ball bearing
- .Insulation Class F
- .IP44 protection depending on installation and position as per EN60034-5
- .G6.3 balancing
- .Rotor and impeller : black paint
- .Finger guard and ring : black paint
- .Motor - UL Recognized component

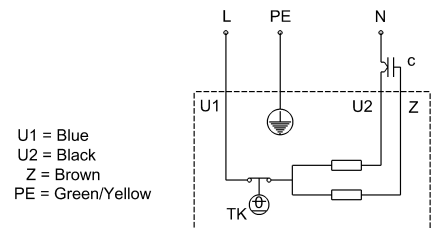

Non contractual document. All specifications are subject to change without prior notice. Picture for information only.



2VGCu25 250A

K18-A5 p

# DATA SHEET

release. d - Revision 01-2018

## Data in accordance to ErP directive

Voltage	115	V
Frequency	50	Hz
Power	0,125	kW <sup>(1)</sup>
Airflow	1000	m <sup>3</sup> /h <sup>(1)</sup>
Pressure	108	Pa <sup>(1)</sup>
Rotation speed	2641	RPM <sup>(1)</sup>

(1) at optimal efficiency point

## Accessories

- 19237
- 19237
- 39658
- 09172

## Measurement setup



- 16085 VIROLE V250 RONDE

## Documents

- Manuel d'utilisation  
[www.ecofit.com/site/normes](http://www.ecofit.com/site/normes)
- Operating and recycling manual  
[www.ecofit.com/anglais/normes](http://www.ecofit.com/anglais/normes)



UL2111 (XEW2,8)  
N° file E135223  
2RS925

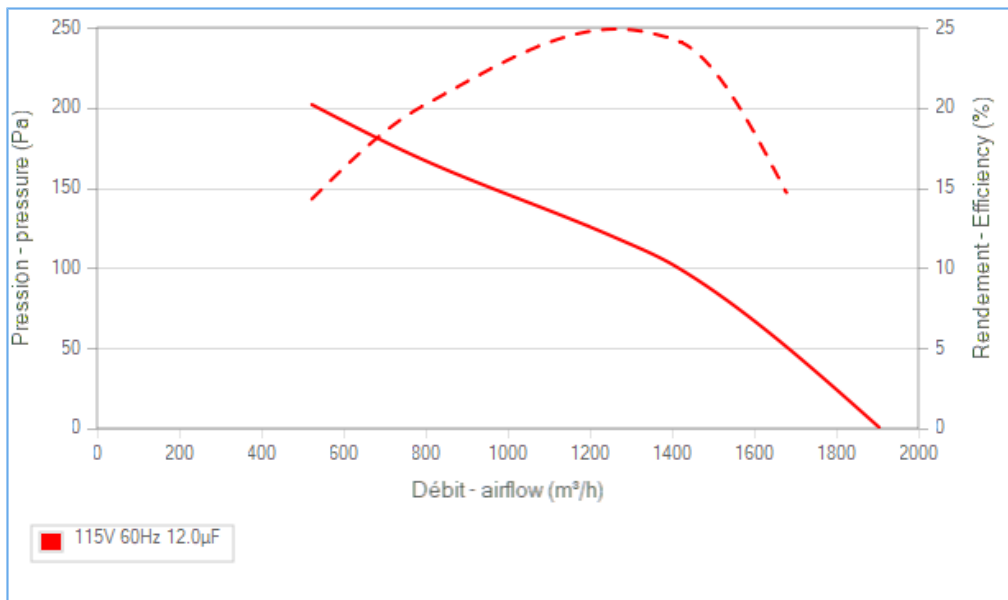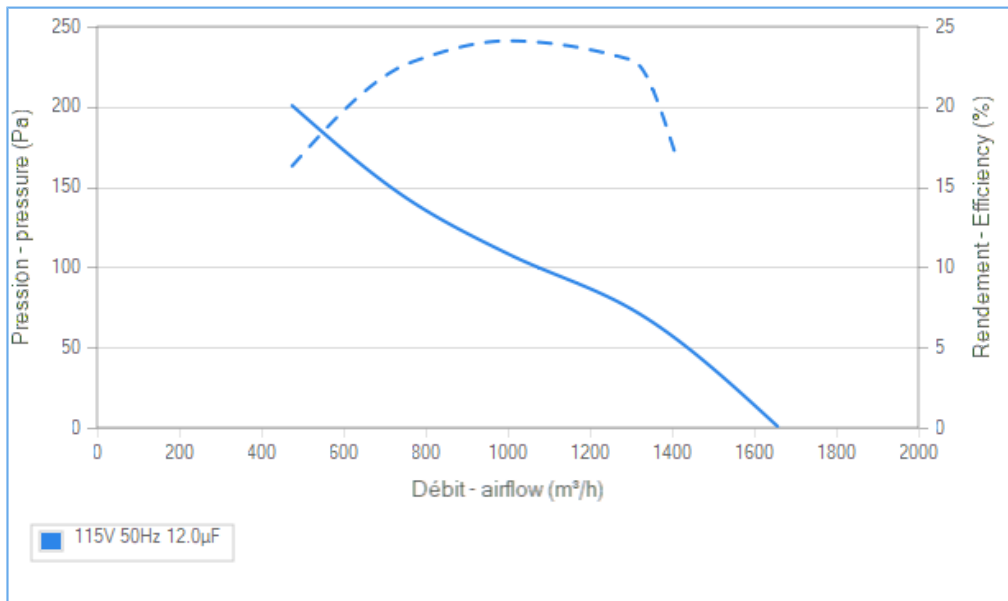

Non contractual document. All specifications are subject to change without prior notice. Picture for information only.