




2VPRu25 250A (115V)

G46-A2 p

DATA SHEET

release. d - Revision 12-2016

Voltage	Frequency	Input Power	Input Current	Capacitor	Airflow	Rotation speed	Acoustic level	Direction rotation	Admissible Temperature	
V	Hz	W	A	µF	m³/h	RPM	dBA		Min/Max	
115	50	106	1,06	12,0	1660	2765	67	R	-40°C / +60°C	
115	60	143	1,25	12,0	1905	2935	71	R	-40°C / +70°C	
115	50	977 CFM						-40°F / 140°F		
115	60	1121 CFM						-40°F / 158°F		





dBA : free blowing

ErP 2013




ErP 2015

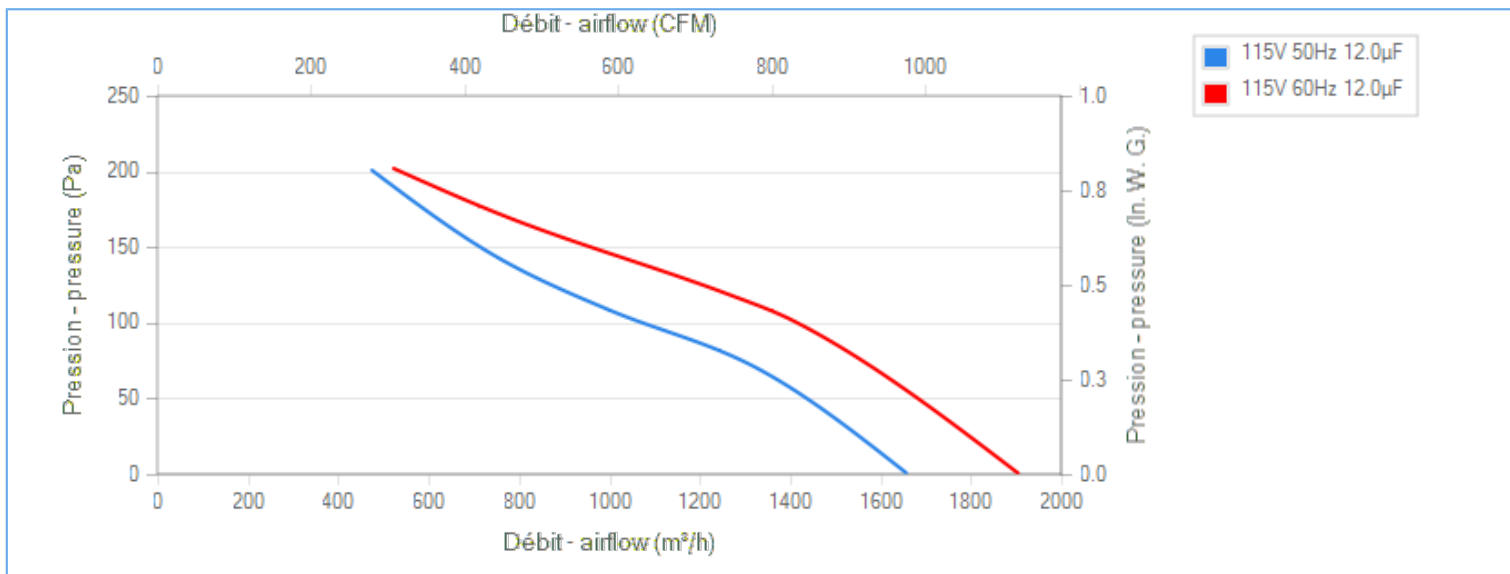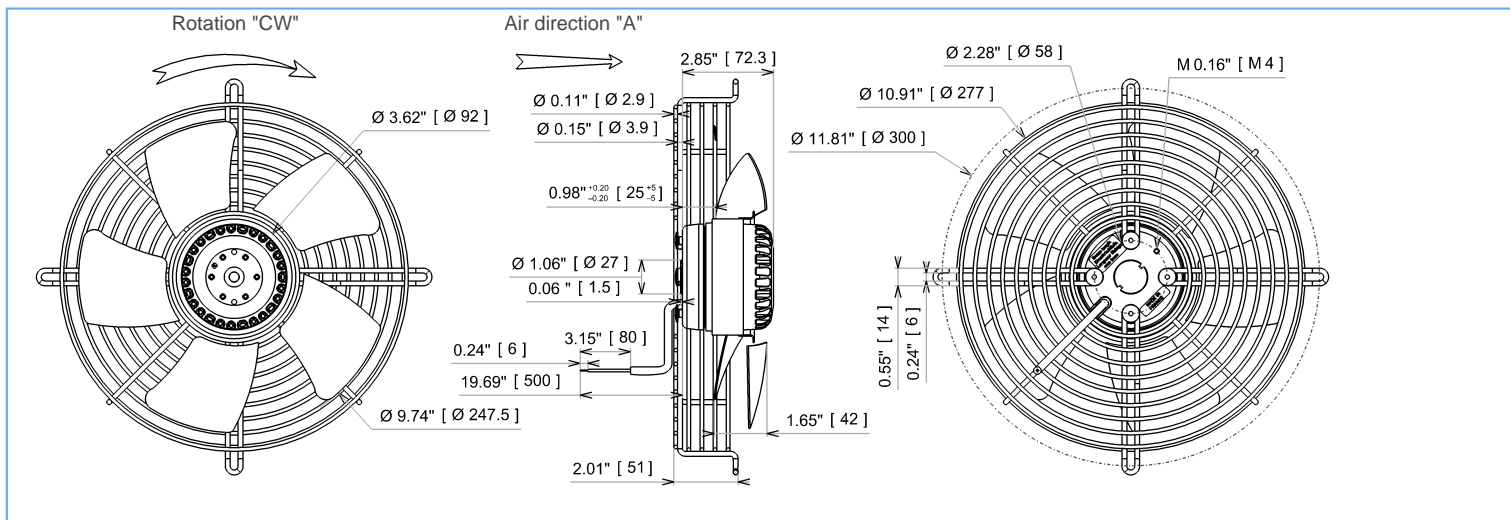

Tested with ECOFIT ring

Description

- .Weight : 1,9 Kg
- .Ball bearing
- .Class F, thermally protected
- .IP44 protection depending on installation and position as per EN60034-5
- .G6.3 balancing
- .Zinc coated impeller
- .Rotor and impeller : black paint
- .Basket finger guard : black paint
- .Motor - UL Recognized component

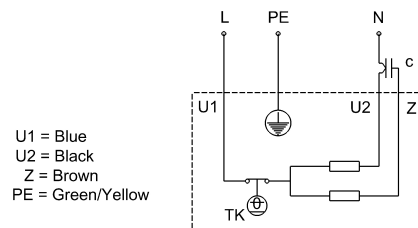

Non contractual document. All specifications are subject to change without prior notice. Picture for information only.



2VPRu25 250A (115V)

G46-A2 p

DATA SHEET

release. d - Revision 12-2016

Data in accordance to ErP directive

Voltage	115	V
Frequency	50	Hz
Power	0,125	kW ⁽¹⁾
Airflow	1000	m ³ /h ⁽¹⁾
Pressure	108	Pa ⁽¹⁾
Rotation speed	2641	RPM ⁽¹⁾

(1) at optimal efficiency point

Accessories

- 19237
- 19237
- 39658
- 09172

Measurement setup

16085 VIROLE V250 RONDE

Documents

Manuel d'utilisation



www.ecofit.com/site/normes

Operating and recycling manual

www.ecofit.com/anglais/normes



UL2111 (XEW2,8)
N° file E135223
2RS925

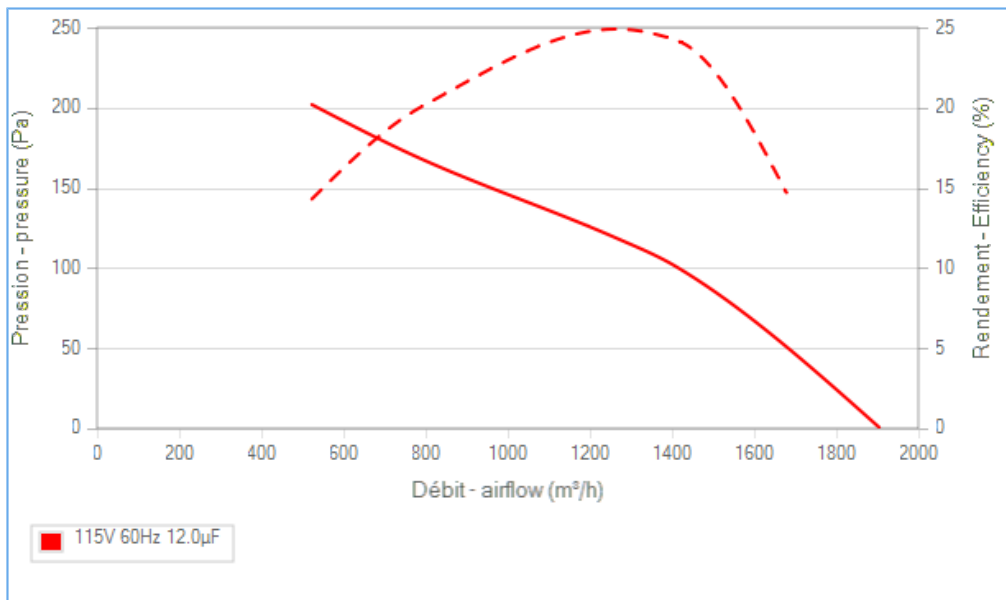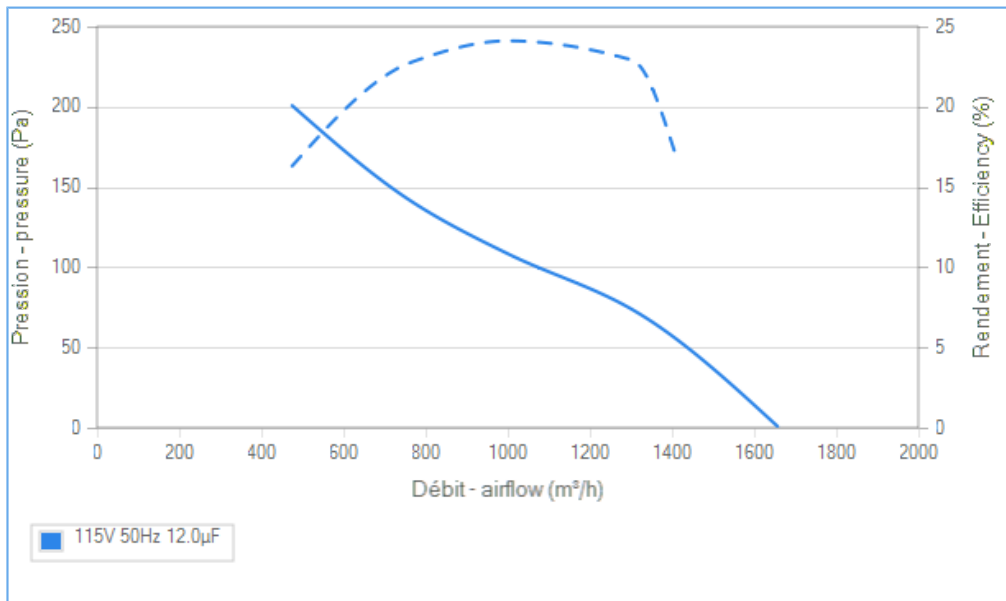

Non contractual document. All specifications are subject to change without prior notice. Picture for information only.