



# 4GDSu25 133x190L (115V) G28-A7 p



## DATA SHEET

release. b - Revision 08-2018

| Voltage | Frequency | Input Power | Input Current | Capacitor | Airflow           | Rotation speed | Direction rotation | Admissible Temperature |
|---------|-----------|-------------|---------------|-----------|-------------------|----------------|--------------------|------------------------|
| V       | Hz        | W           | A             | μF        | m <sup>3</sup> /h | RPM            |                    | Min/Max                |
| 115     | 50        | 80          | 0,71          | 8,0       | 725               | 1125           | L                  | -40°C / +70°C          |
| 115     | 60        | 95          | 0,83          | 8,0       | 765               | 1165           | L                  | -40°C / +70°C          |
| 115     | 50        |             |               |           |                   | 426 CFM        |                    | -40°F / 158°F          |
| 115     | 60        |             |               |           |                   | 450 CFM        |                    | -40°F / 158°F          |





NA : not applicable

ErP 2013

NA


ErP 2015

NA

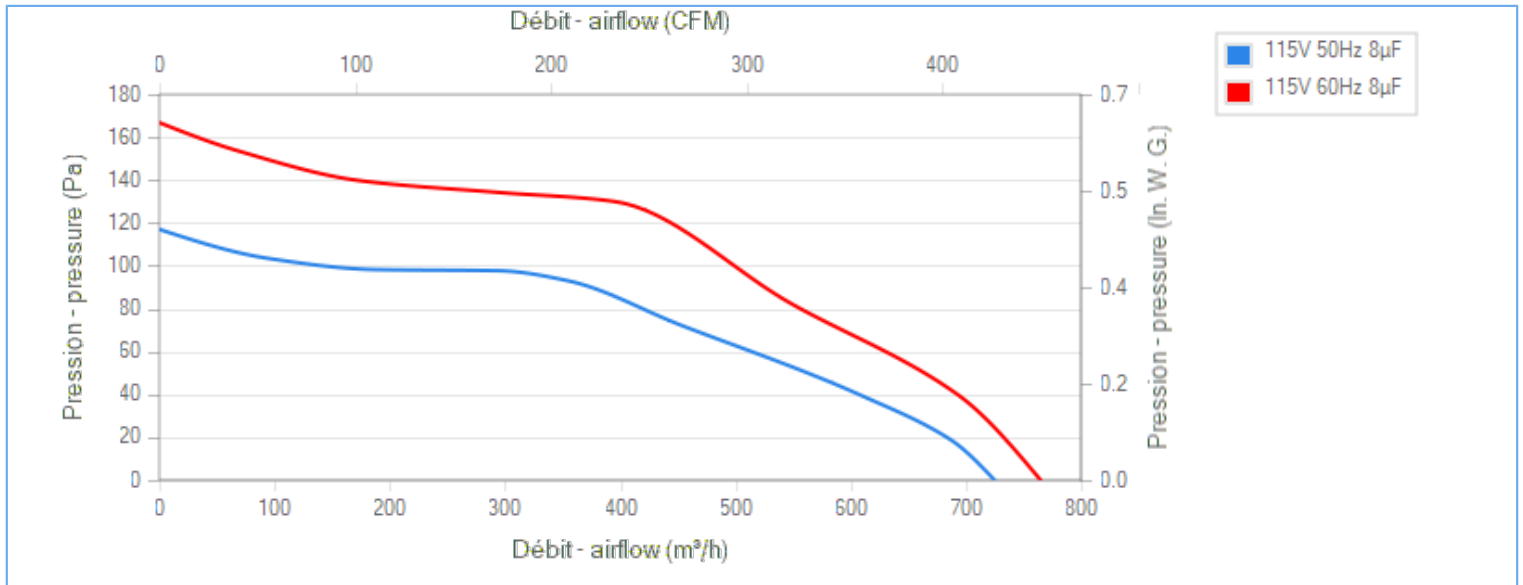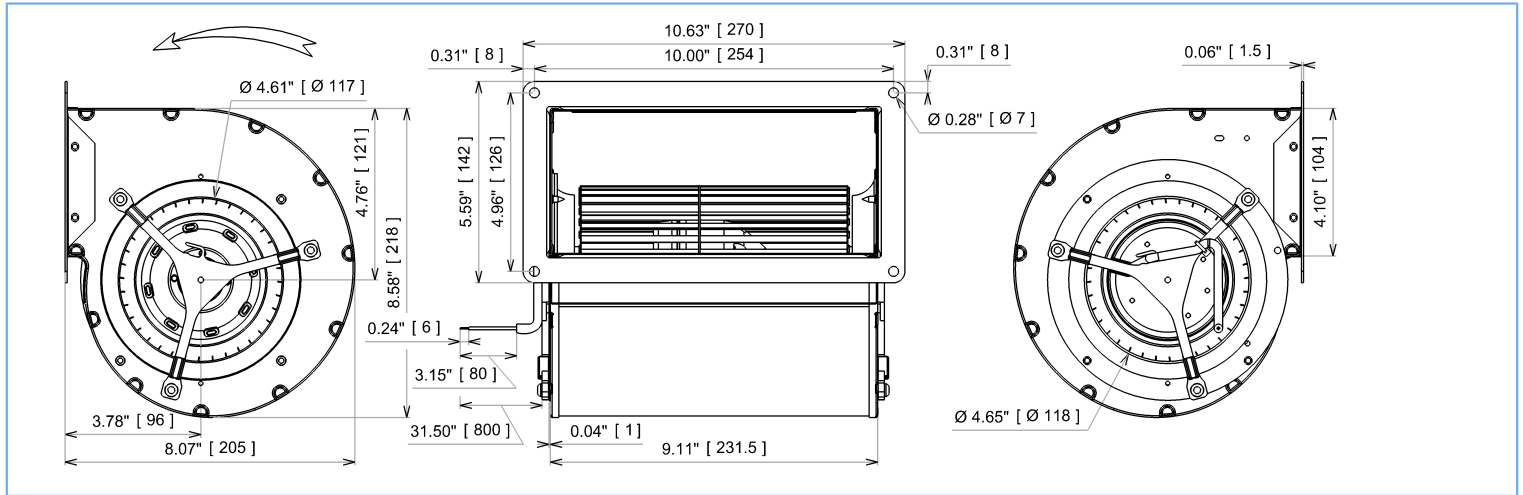

### Description

- .Weight : 3,4 Kg
- .Ball bearing
- .Class F, thermally protected
- .IP44 protection depending on installation and position as per EN60034-5
- .G2.5 balancing
- .Scroll housing : black paint
- .Galvanized steel impeller
- .Motor - UL Recognized component

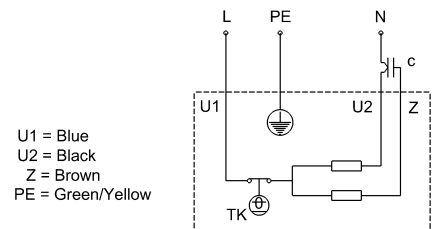



4GDSu25 133x190L (115V) G28-A7 p



# DATA SHEET

release. b - Revision 08-2018

## Data in accordance to ErP directive

|                |       |                                  |
|----------------|-------|----------------------------------|
| Voltage        | 115   | V                                |
| Frequency      | 50    | Hz                               |
| Power          | 0,065 | kW <sup>(1)</sup>                |
| Airflow        | 355   | m <sup>3</sup> /h <sup>(1)</sup> |
| Pressure       | 93    | Pa <sup>(1)</sup>                |
| Rotation speed | 1355  | RPM <sup>(1)</sup>               |

(1) at optimal efficiency point

ErP directive (EU 2009/125/EC) not applicable :  
Power at optimum energy efficiency point

## Accessories

- 19222
- 19222
- 21338
- 09145

## Measurement setup



Contact ECOFIT

## Documents

- Manuel d'utilisation  
[www.ecofit.com/site/normes](http://www.ecofit.com/site/normes)
- Operating and recycling manual  
[www.ecofit.com/anglais/normes](http://www.ecofit.com/anglais/normes)



UL2111 (XEW2,8)  
N° file E135223  
4SS925

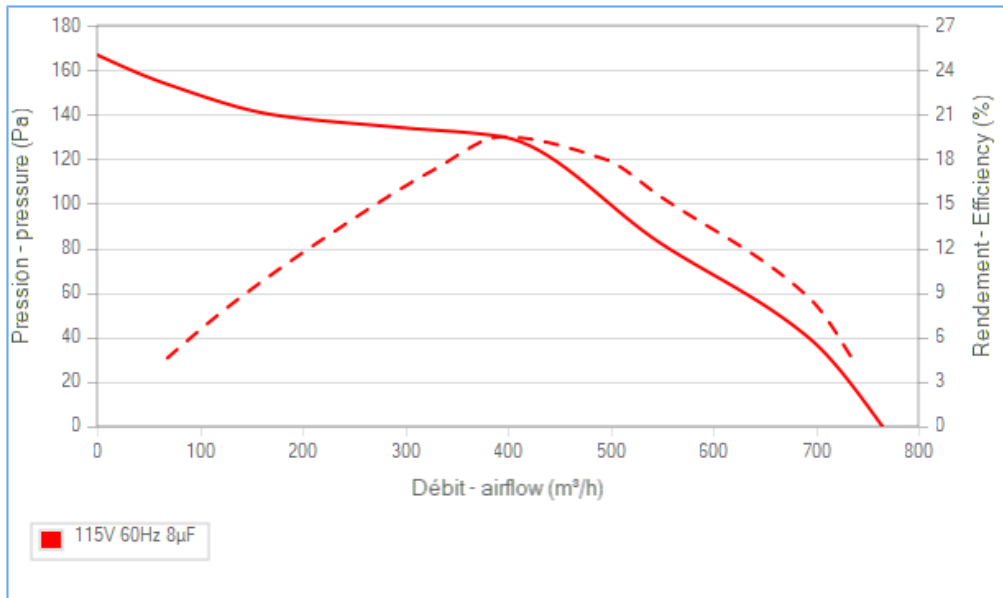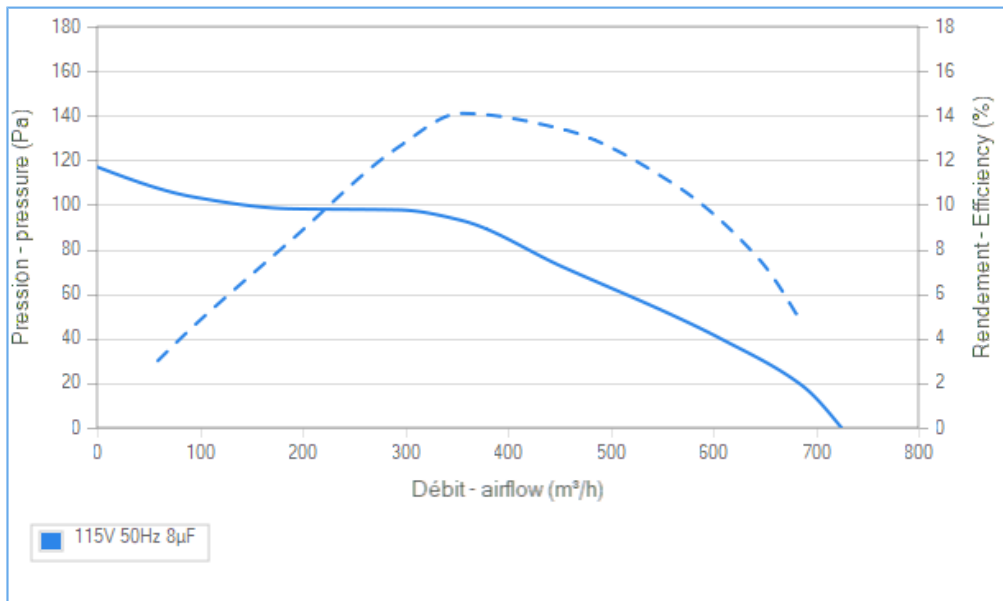

Non contractual document. All specifications are subject to change without prior notice. Picture for information only.