


© THIS DRAWING IS THE EXCLUSIVE PROPERTY OF MARQUARDT. WITHOUT THEIR CONSENT IT MAY NOT BE REPRODUCED OR GIVEN TO THIRD PARTIES.

CONFIDENTIAL

VERTRAULICH

© Alle Rechte bei Marquardt, auch fuer den Fall von Schutzrechtsanmeldungen. Jede Verfertigungs- befugnis, wie Kopier- und Weitergaberecht, bei uns.

1	2	3	4
recommended cut-out for snap-in fixing ledge opposite to snap-in direction)	wall thickness	length of cut-out	width of cut-out
	0.75 to 1.25 1.25 to 2 2 to 3	19.2 ^{+0.1} 19.4 ^{+0.1} 19.8 ^{+0.1}	12.9 ^{+0.1} 12.9 ^{+0.1} 12.9 ^{+0.1}

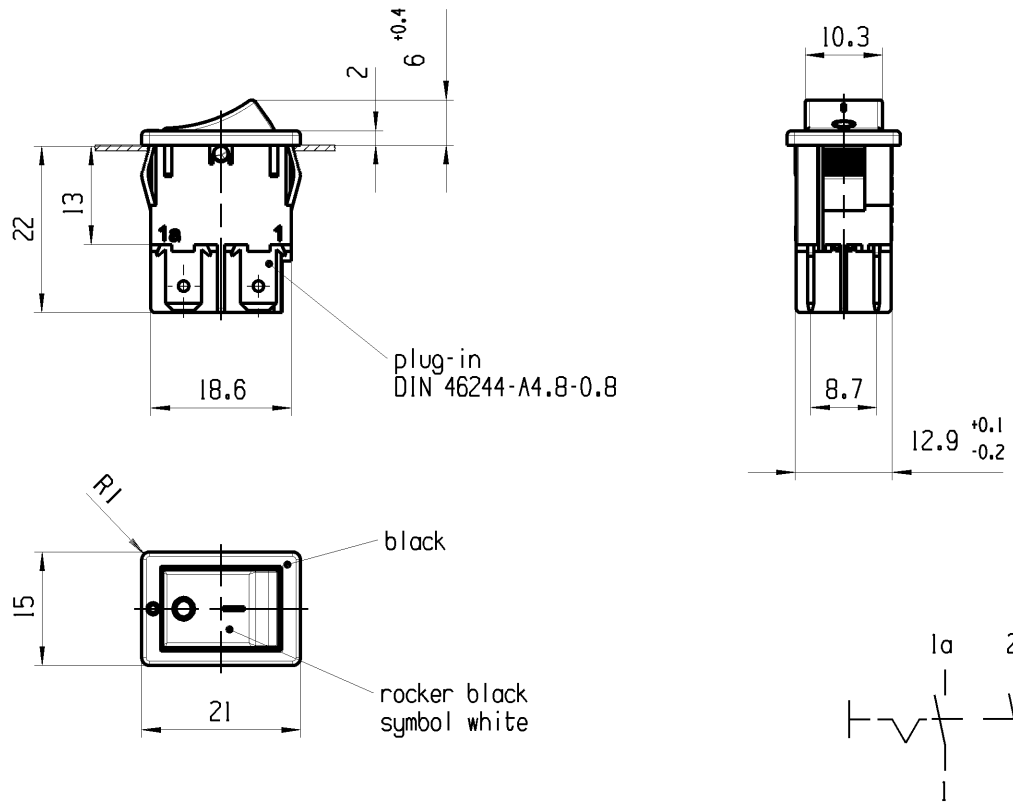

Marking

1858.
10(10)A 250Vac 5E4
16(10)A 250Vac IE4
15 T100/55 cRU US

DPST
suitable for appliances of class II
protected acc. to DIN 40 050 IP40

code of manufacture:
place/year/week

on box: G
0041.1761

G = matching nach IEC 60335-1:2001 clause 30

General tolerances					Sheet 01			Ident. K	Document number 18581103	Index i
All dimensions are in millimetres	Shape and location ⊙ ≡	Angle ± 2°	Edge tolerance 	0-6	± 0.2	± 0.2	Format DIN A4	Projection	Scale 1:1	appliance switch
				>6-15	± 0.4	± 0.3				
				>15-30	± 0.4	± 0.5				
				>30-70	±					
				>70-120	±	± 10%				
>120	±									
i	111886	2017-11-14		MUT	System NX V10.0			 MARQUARDT		
h	103593	2016-09-14		MUT	Replacement of					
g	47886	2006-06-23		MUT	Zg.gl.Nr.v.01.07.1994					
r	41634	2004-12-03		BRC						
Index	ECN-No.	Date (YYYY-MM-DD)		Edited by						