


CONFIDENTIAL

VERTRAULICH

THIS DRAWING IS THE EXCLUSIVE PROPERTY OF MARQUARDT. WITHOUT THEIR CONSENT IT MAY NOT BE REPRODUCED OR GIVEN TO THIRD PARTIES.

Alle Rechte bei Marquardt, auch fuer den Fall von Schutzrechtsanmeldungen. Jede Veruegungsbefugnis, wie Kopier- und Weitergaberecht, bei uns.

A	recommended cut-out for snap-in fixing (edge opposite to snap-in direction)	1	2	3	4
		wall thickness	length of cut-out	width of cut-out	
		0.75 to 1.25	19.2 -0.1	12.9+0.1	
		1.25 to 2	19.4 -0.1	12.9+0.1	
		2 to 3	19.8 -0.1	12.9+0.1	

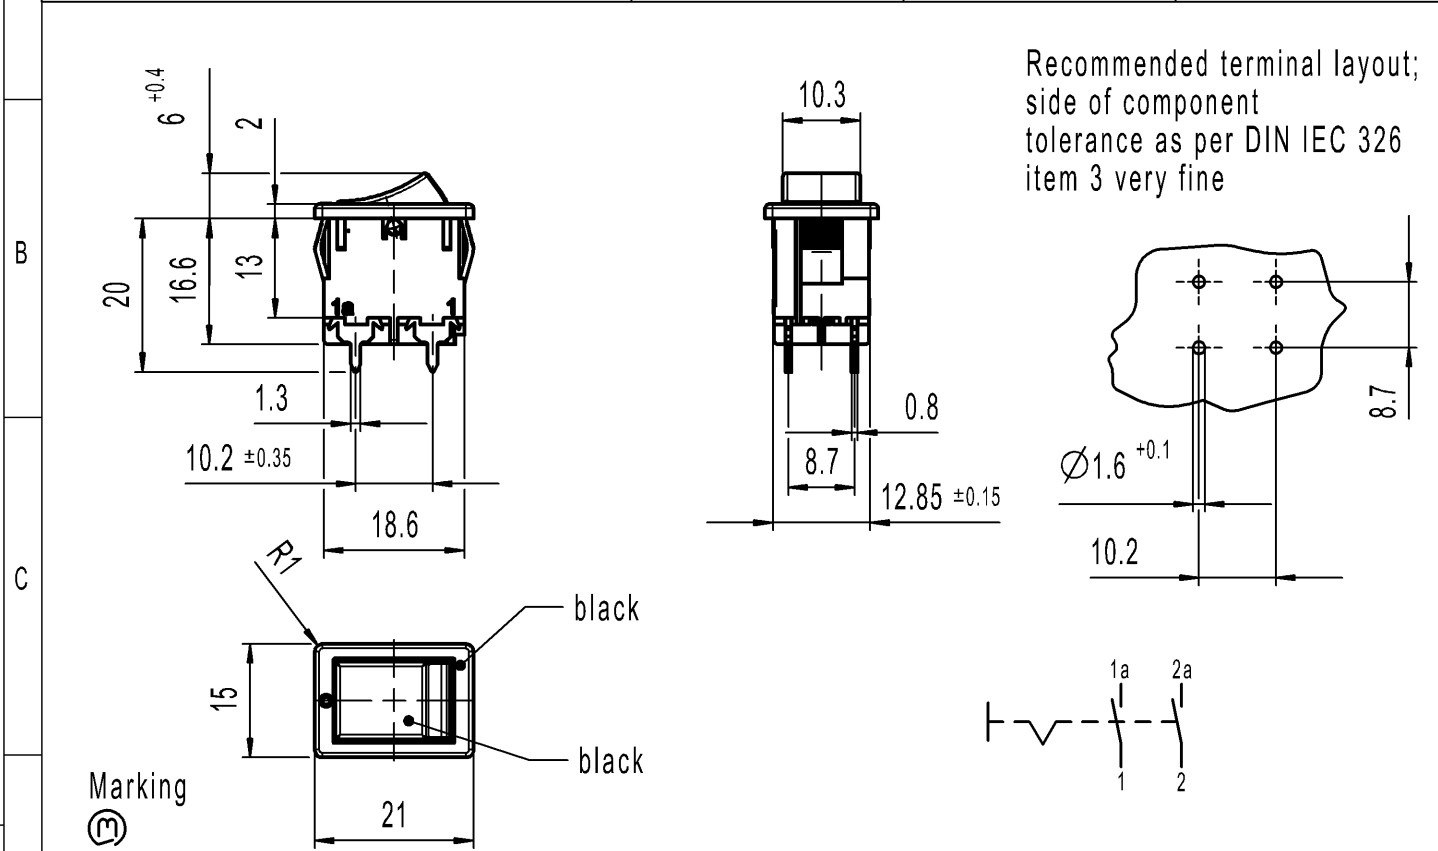

Recommended terminal layout;  
side of component  
tolerance as per DIN IEC 326  
item 3 very fine


Marking  
 1858.  
 6(4)/250~5E4  
 10(4)/250~ T100/55  
 5/100A 250V~



12A 125-250V AC  
 1/3 HP 125V AC  
 1/2 HP 250V AC  
 R138

Code of manufacture : place/year/week  
 On box: G

DPST  
 Suitable for appliance of class II  
 Protected according to DIN 40 050, IP40  
 G= matching IEC 60335-1:2001 clause 30



-	-	-	1858.2202-XX
Figure	Type	Customer Part No.	Art.No.-PI
Shape and location	Angle ± 2 °	Sheet 01	Ident. K
	Edge tolerance	Format DIN A4	Document number 18582202
	Length	Projection	Index k
	Radii	Scale 1:1	Appliance Switch
		All dimensions are in millimetres	
k	141198	2022-01-03	MARQUARDT
j	47886	2006-06-23	
i	41634	2004-12-03	
h	36320	2003-06-02	
Index	MEC-No.	Date (YYYY-MM-DD)	
		System NX V1872	Replacement of
		Zg.gl.Nr.v.18.02.1994	