


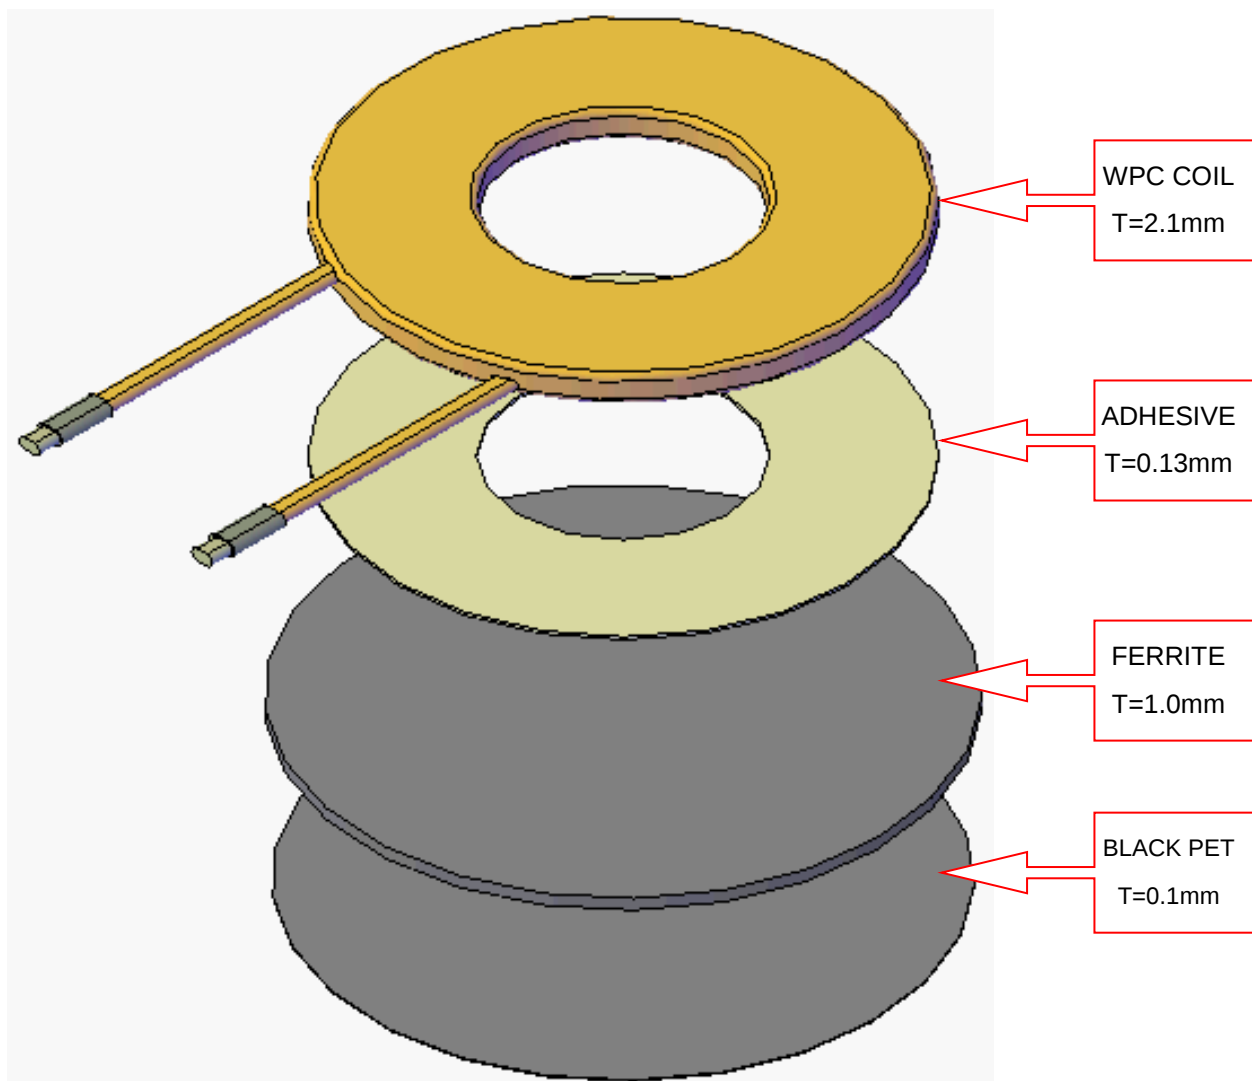

4. Coil Specification:

- a.) COIL MATERIAL:0.08*105P(USTC)*2P
- b.) TWO LAYERS COIL 10 TURNS (5 BIFILAR TURNS EACH LAYERS)
- c.) COIL DIMENSIONS: OD=44.0±1.5mm ; ID=20.5±0.5mm ; H=2.1±0.5mm

5. Electrical Specification:

Test Item	Test Condition	Specification
Inductance	100K Hz, 1V	6.3uH±10%
Q value	100K Hz, 1V	80 TYP
DCR	@25°C	25.0mΩ MAX

UNLESS OTHER SPECIFIED TOLERANCES ON :

X= X.X= X.XX=±

ANGLES=± HOLEDIA=±

SCALE : UNIT : mm

DRAWN BY: 王聖元 CHECKED BY: 吳金依

DESIGNED BY: 曾國恆 APPROVED BY: 洪碩國

TITLE : WPC-W-P-TX-A11-013-1 工規



INPAQ TECHNOLOGY CO., LTD.

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

DOCUMENT
NO.

ENS000121590

SPEC REV.
A1

7.Environmental condition:

STORAGE TEMPERATURE RANGE: -20°C~+70°C

OPERATING ENVIRONMENTAL TEMPERA RANG: -5°C~ + 60°C

STORAGE ENVIROMNENTAL HUMIDITY:75% MAX.(WITHOUT ICE OR DEW. MAX .WET-BULB TEMPREATURE IS 25°C)

UNLESS OTHER SPECIFIED TOLERANCES ON : X= X.X= X.XX=± ANGLES=± HOLEDIA=±			INPAQ TECHNOLOGY CO., LTD.	
SCALE :	UNIT : mm			
DRAWN BY: 王聖元	CHECKED BY: 吳金依	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION		
DESIGNED BY: 曾國恆	APPROVED BY: 洪碩國			
TITLE : WPC-W-P-TX-A11-013-1 工規		DOCUMENT NO.	ENS000121590	SPEC REV. A1