


WPC-W-P-RX-CF-044 Specification

1. Explanation of Part Number:

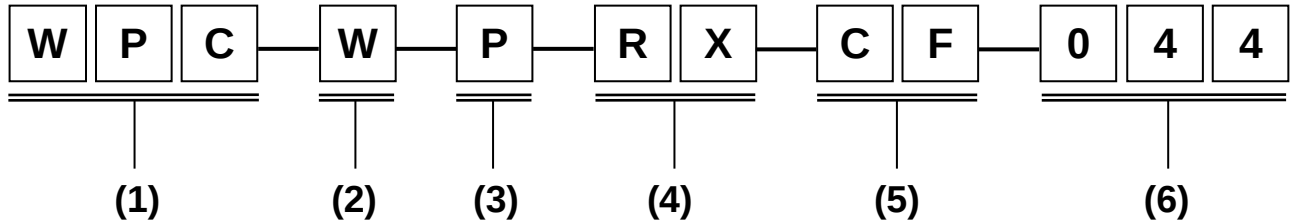

- (1) Product type : Wireless Power Charging
- (2) Mode : WPC
- (3) Active or passive : Passive
- (4) Type : Power Receiver
- (5) Antenna material or type : COIL +Nano
- (6) Suffix : Serial number

2. Electrical Specification:

Test Item	Test Condition	Specification
Inductance	100K Hz, 1V	19.2±10%uH
Q	100K Hz, 1V	20 (TYP)
DCR	@25℃	300mΩ(MAX)

UNLESS OTHER SPECIFIED TOLERANCES ON :
X = ± X . X = ± X . X X =
ANGLES = ± HOLE DIA = ±



INPAQ TECHNOLOGY CO., LTD.

SCALE : N/A

UNIT : mm

DRAWN BY: 王世忠

CHECKED BY: 何幼青

DESIGNED BY: 王世忠

APPROVED BY: 何幼青

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION


TITLE : WPC-W-P-RX-CF-044 Specification

**DOCUMENT
NO.**

ENS000125730

**SPEC REV.
A1**

3. Dimension:

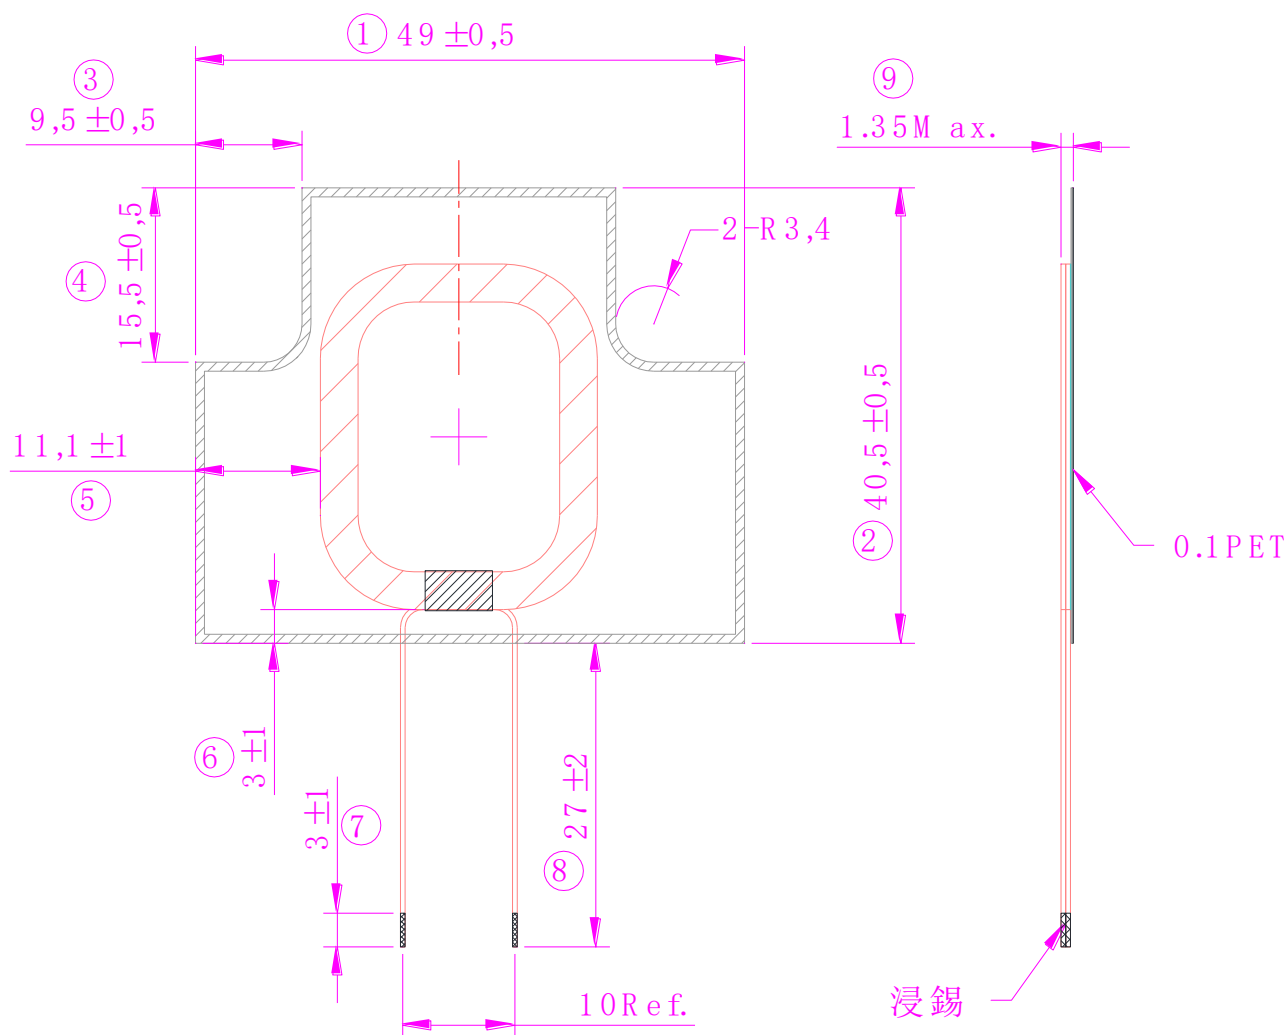

4. Operating & Storage Condition:

- OPERATING TEMPERATURE RANGE: $-25^{\circ}\text{C} \sim +75^{\circ}\text{C}$
- STORAGE TEMPERATURE RANGE: $-20^{\circ}\text{C} \sim +75^{\circ}\text{C}$; HUMIDITY: 50% MAX.

UNLESS OTHER SPECIFIED TOLERANCES ON :
 $X = \pm$ $X.X = \pm$ $X.XX =$
 ANGLES = $\pm$ HOLE DIA = $\pm$



INPAQ TECHNOLOGY CO., LTD.

SCALE : N/A

UNIT : mm

DRAWN BY: 王世忠

CHECKED BY: 何幼青

DESIGNED BY: 王世忠

APPROVED BY: 何幼青

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

TITLE : WPC-W-P-RX-CF-044 Specification


DOCUMENT
NO.

ENS000125730

SPEC REV.
A1

5. Packing Specifications:

No/Item	物料名稱	料號	主件底數/用量
1	PET,TRAY,360X260X8mm_18PCS_063	800000387904	1152/68
2	包裝內箱,390X275X90mm	800001201007	1152/4
3	Partition Board,405X285X3mm	800000599404	1152/2
4	Carton-O,420*305*390mm	800000700302	1152/1

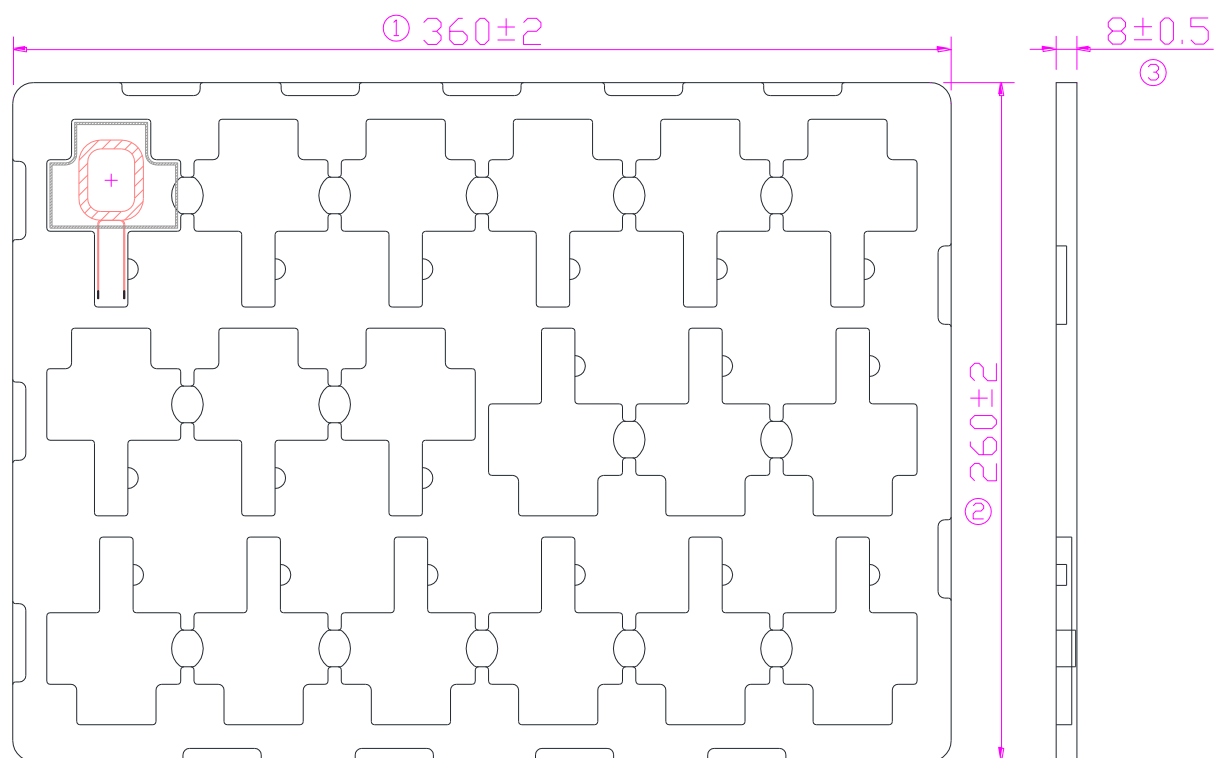

1. TRAY 每格放入 1 PC 天線產品，COIL 面朝上，1 TRAY 可放 18 PCS 產品。
2. 將放滿產品的 TRAY 以錯盤方式疊放 16 組，頂層疊放 1PC 空的 TRAY 後，置入小內箱，每內箱為 288 PCS 產品。
3. 將 1 PC 天地板置於外箱底部，將 4 組小內箱疊放於外箱內，上層再放置 1 PCS 天地板，封箱即完成產品包裝，每外箱為 1152PCS 產品。

UNLESS OTHER SPECIFIED TOLERANCES ON :
 X = ± X . X = ± X . X X =
 ANGLES = ± HOLE DIA = ±



INPAQ TECHNOLOGY CO., LTD.

SCALE : N/A

UNIT : mm

DRAWN BY: 王世忠

CHECKED BY: 何幼青

DESIGNED BY: 王世忠

APPROVED BY: 何幼青

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

TITLE : WPC-W-P-RX-CF-044 Specification

DOCUMENT
NO.

ENS000125730

SPEC REV.
A1