

VANSONIC ENTERPRISE CO., LTD.

8F., No.7, Lane 16, Sec.2, Szechwan Road, Panchiao, Taipei Hsien, TAIWAN.

TEL: +886-2-29626335




FAX: +886-2-29625220

E-MAIL: VANSONIC@MS4.HINET.NET

1.	MODEL:	40CS08FN -5 -M50ND(Black Mylar)-M50NT(Clear Mylar)			
2.	Dimension	Outer Diameter	40 mm.	Baffle Opening	35.8 mm.
		Height	Refer to Drawing.	Weight	9.2 Grams.
3.	Magnet	Materials	Rare Earth	Size	∅ 12.5X 1.5 mm.
4.	Nominal Impedance	8	± 15 %	At	1000 Hz.
5.	Power Rating	Normal	500 mW.	Maximum	1000 mW.
6.	Lowest Resonant Frequency	380	± 20 %		Hz.
7.	Output Sound Pressure Lever (S.P.L.)	83	± 3 db / 0.5 Watt		0.5 Meter.
		Average at	800,	1000,	1200,
8.	Frequency Range	200	~ 10000 Hz.	Average SPL	- 10 db.
9.	Distortion	5 %	Maximum At	1000 Hz.	500 mW.
10.	Abnormal Sound Test	Must be Normal Tested By		2.0 Volts.	Sine Wave.
11.	Load Test	White Noise with Weighted Filter		2.0 Volts.(RMS)	24Hrs.
12.	Polarity	Diaphragm shall move Forward when Apply a Positive DC.			
		Current to the "+" or "Marked" Terminal.			

MOUNTING NOTICE


AT LEAST
0.8mm
FOR
DIAPHRAGM
MOVING

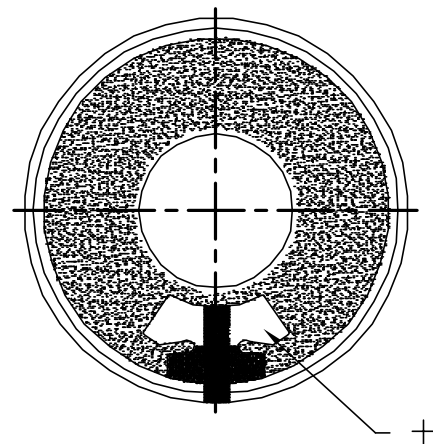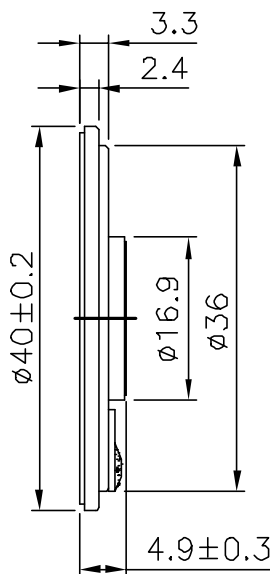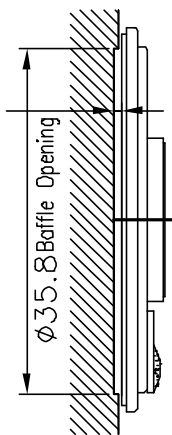

Unit : mm

Housing Material : METAL

40CS08FN-5-M50ND VOL:2.00(0.5M) DIS:0.5M VANSONIC
X:1.0000kHz *Y:83.44dB ZA:Live Curve SSR Fund.

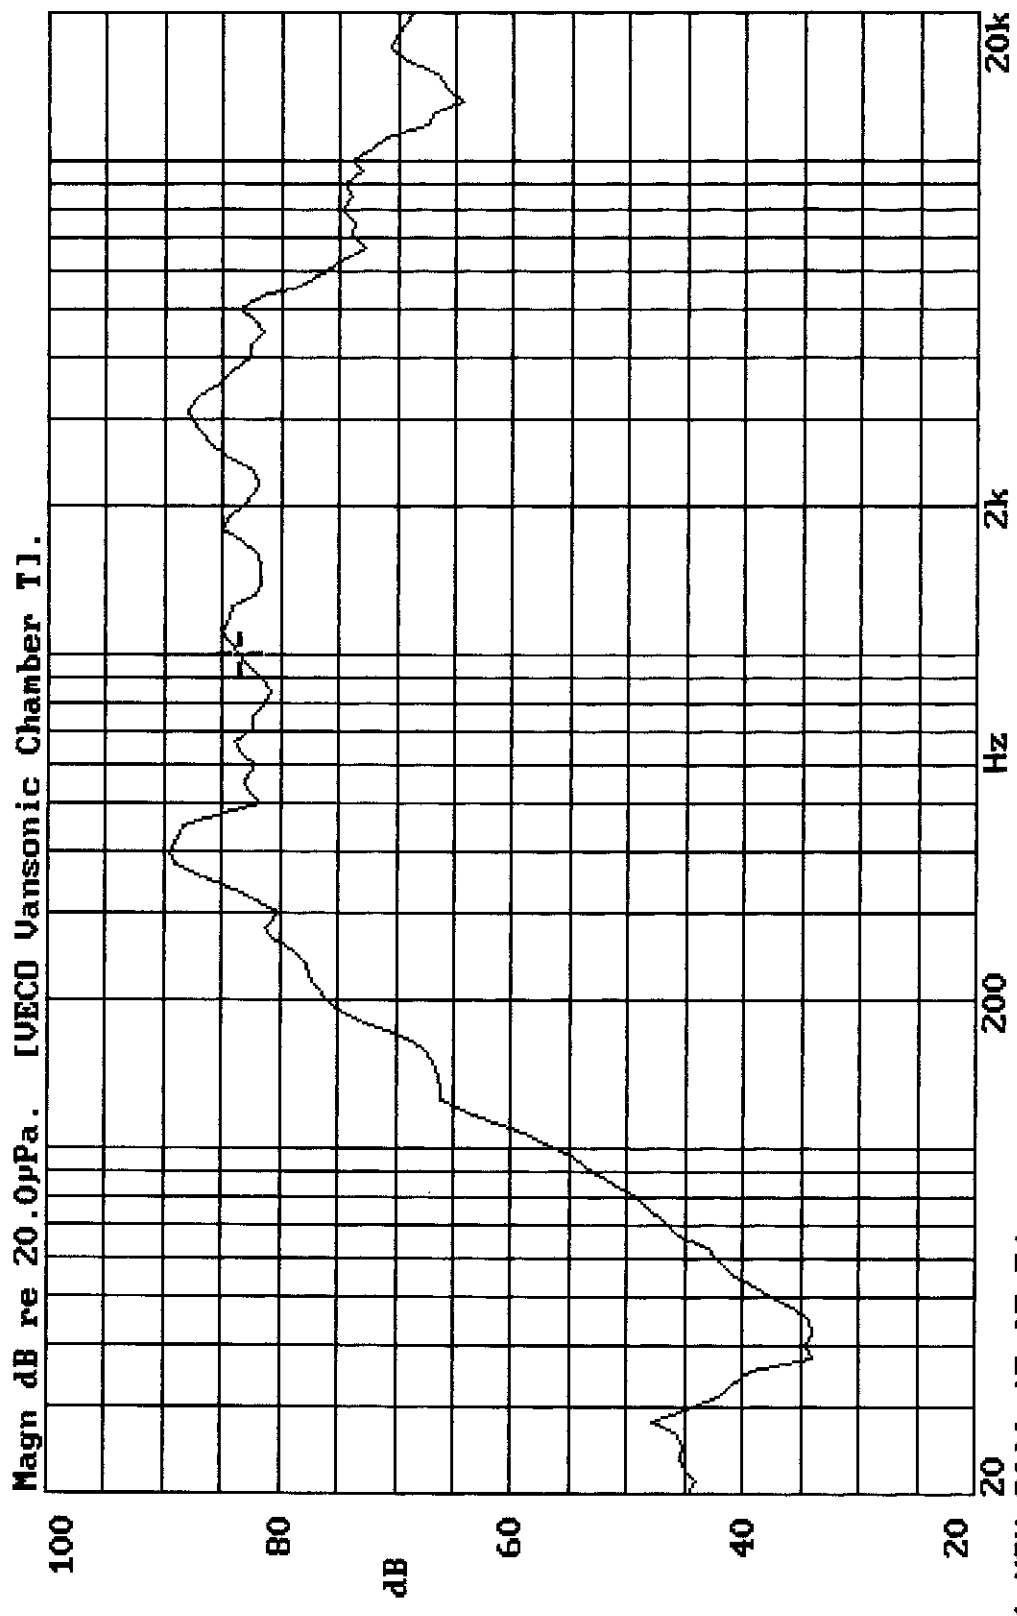

21-NOV-2000 17:07:54

Mode: SPEAKER

