


850nm TO46 polarization maintaining fiber coupled VCSEL diode (without TEC)

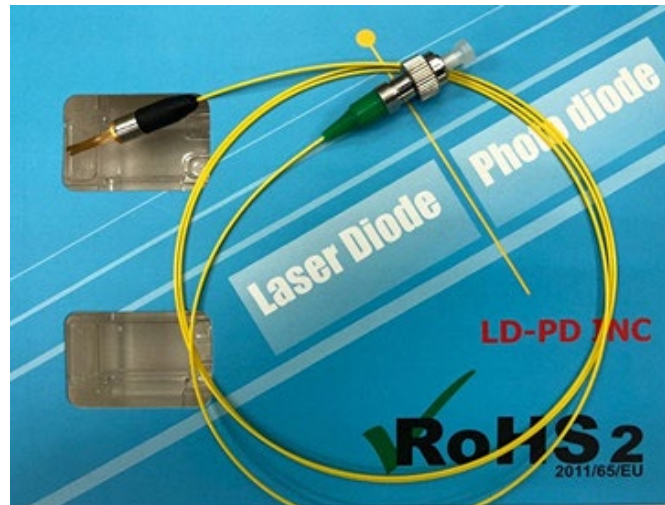

Description:

850 nm single-mode VCSEL is an ideal choice for high demand sensing system applications. VCSEL is a vertical emission MOVPE grown GaAsP/AlGaAs single-mode diode laser. Wavelength tuning can be achieved by laser current and temperature tuning.

Features:

- Gaussian beam profile
- Small beam divergence angle
- Narrow spectral width
- Low power consumption

Application:

- CPT atomic clock
- Optical coherence experiment


E/O Characteristics:

Condition: TO P = 25°C

Parameters	value
Emission Wavelength	850nm ± 10nm
Guaranteed output power	≥0.3 mW
Threshold current	1.2 mA
Laser current	6 mA
Laser voltage	2.1 V
Test output power	1.2 mW
polarization extinction ratio (PER)	>16 dB
Fiber type	PMF Polarization maintaining fiber
Fiber length	>80 cm
Connect type	FC/APC
Package type	TO46 Coaxial package

NOTE: Please clean the fiber end before operating it, and make sure no dust on the fiber end.

Pin definition:

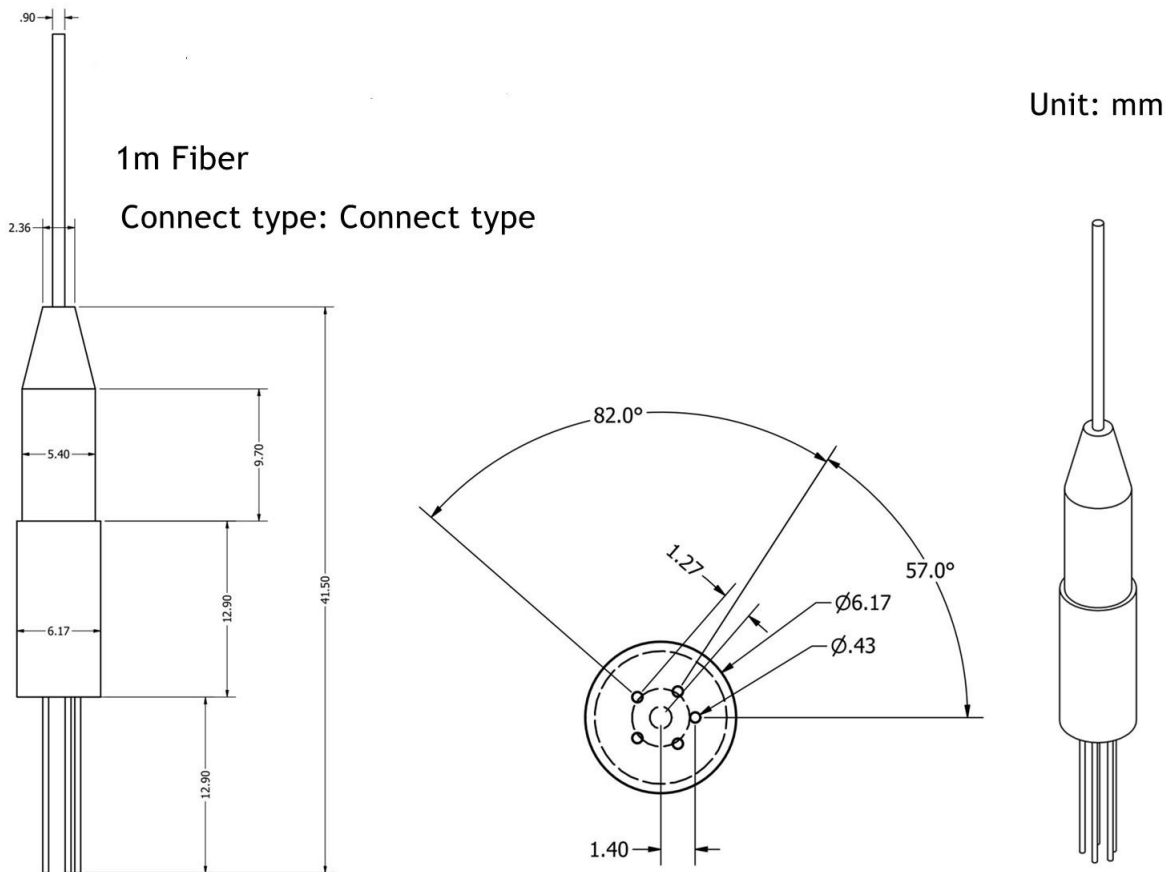

Safety Information:

- Avoid eye exposure to direct or scattered radiation.
- ESD precautions must be taken.
- Use constant current power supply. Avoid surge current.
- Laser diode must be used according to the specifications.
- Laser diode must work with good cooling.
- Storage: -20°C~+80°C.