

01/2025




endrich NEWS

www.endrich.com

EINLADUNG ENDRICH PASSIVE TECH DAY 20. FEBRUAR 2025

Gemeinsam mit vier Herstellern zeigen wir Ihnen die aktuellen Fortschritte im Bereich passiver Bauelemente und laden Sie herzlich zum regen Austausch ein.

THEMEN

Hersteller	Thema
	Effective EMI noise suppression with ABC-ATEC's ferrite toroidal SMD power line filter
Panasonic	Beat the next MLCC shortage: save money and improve performance with Panasonic Polymer technology
	High heat-resistant technology for hybrid polymer capacitors leading to higher ripple & long-life and cost reduction
	Improving reliability and lifetime of precision circuits with Susumu resistors and shunts

Die Veranstaltung ist in drei Vortragsblöcke aufgeteilt, die um 10:00 Uhr, 11:30 Uhr und 13:30 Uhr beginnen, so dass Sie bis zu drei Vorträge entsprechend Ihrer Interessen besuchen können. Für Ihr leibliches Wohl ist bestens gesorgt.

Wir bitten um eine verbindliche schriftliche Anmeldung bis zum 07.02.2025 an techday@endrich.com oder scannen Sie den beigefügten QR Code.



Mehr Informationen finden Sie auf unserer Homepage www.endrich.com

Sie haben Interesse?
Dann melden Sie sich direkt an.

AMORPHOUS SILICON SOLAR CELLS PANASONIC



For indoor and outdoor


Available with glass,- stainless steel-
and plastic film substrate

In today's eco-conscious world, the demand for sustainable and efficient energy solutions is greater than ever. "Amorton" is Panasonic's proprietary line, offering energy efficiency, flexibility, and reliable performance. Unlike traditional crystalline silicon cells, these are made of non-crystalline material, featuring high light absorption and an ultra-thin design. The name "Amorton" combines "amorphous silicon" and "photons," showcasing its advanced light-capturing technology.

When a semiconductor is exposed to a light source of suitable intensity, a large number of electrons (-) and holes (+) are generated and form electricity.


At a p/n junction between two different semiconductor materials, the electrons are collected in the n-type material and the holes are collected in the p-type material by internal electric field.

When an external load is connected, electricity flows through the load. Then generated electricity can be used.

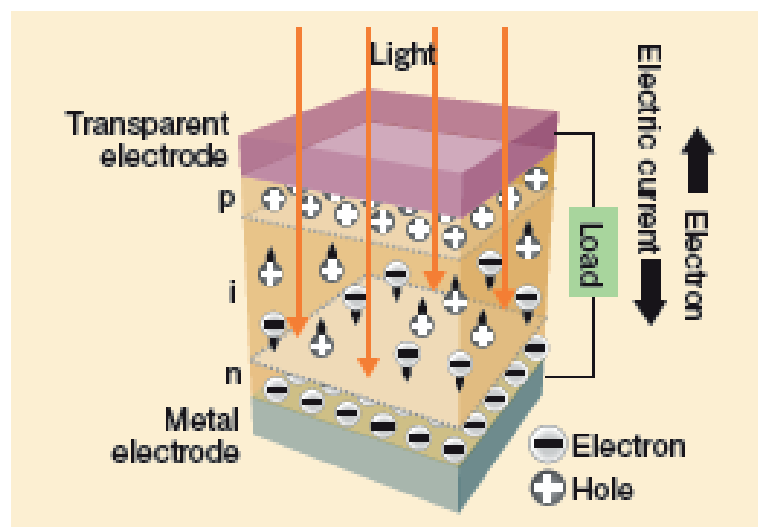

NEWS

Amorphous silicon solar cells offer excellent adaptability to device voltage requirements by allowing multiple cells to be connected in series during formation, unlike crystalline silicon cells. Their unique manufacturing methods enable the use of various substrates like stainless steel, glass or plastic film, creating flexible, bendable, or custom-shaped designs, including transparent sections. With high sensitivity to visible light (400–700 nm), these solar cells can also function effectively as visible light sensors.

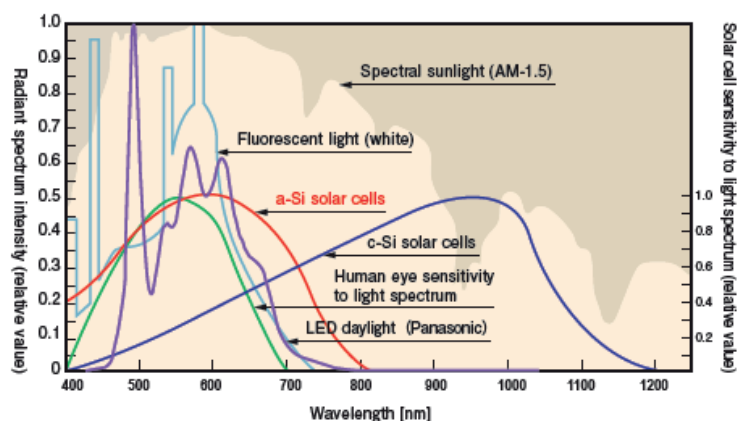

Radiant spectrum of light source and spectral sensitivity of solar cells

APPLICATIONS

- Wearables and electronics: powering devices like wristwatches, e-books, and toys
- Smart home systems: serving as visible light sensors for smart lighting and security devices
- Energy harvesting: supporting energy-efficient IoT devices, temperature sensors, and RFID systems
- Outdoor solutions: ideal for garden lights, LED markers


FEATURES

- High sensitivity to visible light:
Amorton solar cells efficiently capture light in the 400-700 nm range, making them ideal for visible light sensors in smart homes and wearable devices
- Customizable shapes and forms:
Amorton solar cells can be made using various substrates like glass, stainless steel, and plastic film, allowing for unique shapes (round shape), sizes, and even bendable designs suitable for applications such as wristwatches and outdoor lighting
- Lightweight and durable:
The ultra-thin amorphous silicon film (less than 1mm) ensures Amorton cells are lightweight, portable, and durable for indoor and outdoor use
- Energy efficiency for indoor and outdoor use:
Amorton solar cells perform reliably under artificial indoor light or natural sunlight, powering devices like calculators indoors and garden lights outdoors

THERMAL INTERFACE MATERIALS FOR SMART INDUSTRY APPLICATIONS

Celera has the most suitable solutions for the thermal profile of your application.

Celera offers a comprehensive range of solutions for thermal interface materials, sealants and coatings, which are designed to ensure optimal thermal management in a diverse array of applications.

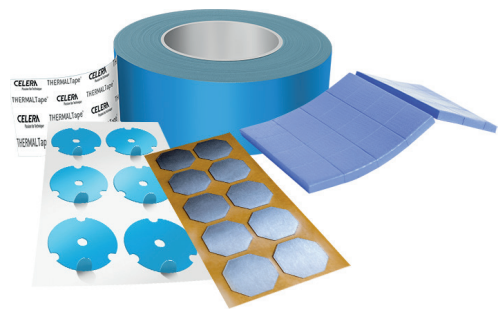

YOUR APPLICATION	THE CHALLENGES	OUR SOLUTIONS
On-board-chargers 	Efficiently dissipating heat from high-power conversion components to prevent overheating and ensure reliable performance in compact, enclosed space	COOLPhase® Phase change material pads 
Inverters 	Effectively managing heat from high voltage switching components to prevent thermal degradation and ensure stable performance in power conversion	FORMAPad® No bleed high-end thermal grease 
Converters 	PCB attachment to aluminum profile and mid/low thermal load generated by LED packages	COOLPad® Low and super low compression pads 
IoT sensors 	Very high/high thermal load generated by COB packages and low clamping force between PCB and heat sink	FlexCOAT® Single-component and silicone-free conformal coating SILCap® Low-stress potting compound 

NEWS


LITHIUM-POLYMER-BATTERIES (LiPo)

Powerful, versatile and flexible in use

Lithium polymer batteries are the ideal solution for flexible designs. The mode of operation of LiPo batteries is identical to that of lithium-ion batteries. Therefore, the same statements apply to lithium-polymer batteries as to lithium-ion batteries. The advantage is the almost infinite number of sizes due to the absence of a stable steel housing. Instead of a solid housing, a plastic-coated aluminum foil is used. This means that very thin battery designs can be realized.

Lithium polymer cells are therefore also lighter. In addition, the large number of different sizes leads to great design freedom for the end application. Individual dimensions are possible in relatively small quantities, so that the space available for the battery can be optimally utilized. The disadvantage is that the battery is more sensitive to mechanical influences due to the lack of a fixed housing.

In addition, the lithium polymer cells react critically to overcharging. LiPo batteries are therefore equipped with protective electronics that protect this rechargeable battery from overcharging. When charging, only chargers for this battery chemistry should be used. LiPo batteries are also known as soft/pouch cells.

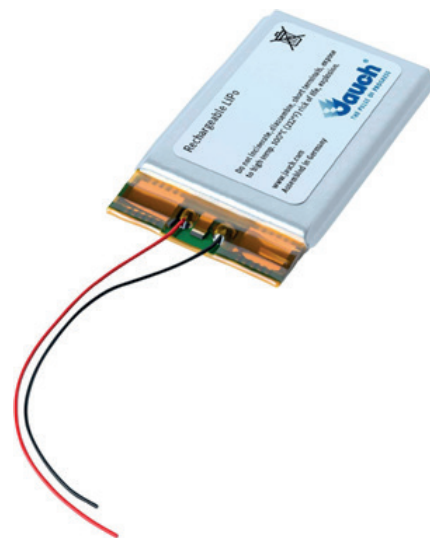

APPLICATIONS


- Battery-operated tools (e.g. cordless screwdrivers etc.)
- Smoke/fire detectors
- RFID and mobile radio systems
- Electronic atomizers
- Autonomous lighting
- IoT applications (smart meters)

FEATURES

- Very high energy density compared to other non-lithium batteries
- Low self-discharge of the cells
- Long-life rechargeable battery with a high number of cycles
- Versatile design and very thin versions possible
- In terms of weight, a very light rechargeable battery
- Integrated protection electronics (must be observed due to battery swelling)
- Individual connections possible
- Approvable with various standards

TWO OPTICAL ROTARY ENCODER ICs

NJL5821 & NJL5822 series

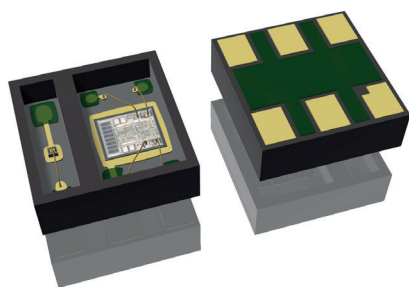

Rotary encoders

The NJL5821R and NJL5822R are miniature optical encoders designed to determine an object's position, direction or movement in relation to a reference point. It provides feedback to control systems, ensuring precise movements and operations in a variety of devices.


The core of the NJL5821R and NJL5822R is a high-brightness infrared LED, four photodiode detectors, and a signal processing unit. These encoders are particularly useful in applications such as a rotation detection, making them valuable in devices like consumer electronics and industrial controls. The main difference between the two encoder ICs is just the level of resolution, the NJL5821 can detect up to 150 LPI and the NJL5822R to 180 LPI. The products are assembled in a compact package measuring just 2.6 x 2.5 x 0.8 mm, making them well-suited for modern applications demanding miniaturization.

How does it work?

To perform the motion measurement, a disk or strip with a linear reflective/non-reflective pattern is assembled to the motor shaft or other moving part of the device. As the disk rotates or the strip moves, it reflects the light emitted by the LED back to the photodiode sensors. The reflected light pulses are detected and converted by internal circuitry into electrical signals, and finally provided on two individual out-of-phase outputs channels (A and B phases).

Each channel produces a series of equally spaced pulses per revolution (PPR), further processing is done by an external microcontroller to determine the rotation or movement characteristics by analyzing the phase relationship between both channels. Both the direction and speed can be detected, making the encoders ideal for applications where both parameters are required.

The advantage of optical encoders is that they have no physical contact to the moving part. This design minimizes wear and tear, resulting in a longer lifespan, a higher reliability, and provide high-resolution measurements. This is crucial for applications requiring precise control, such as robotics, industrial automation, and computer peripherals.

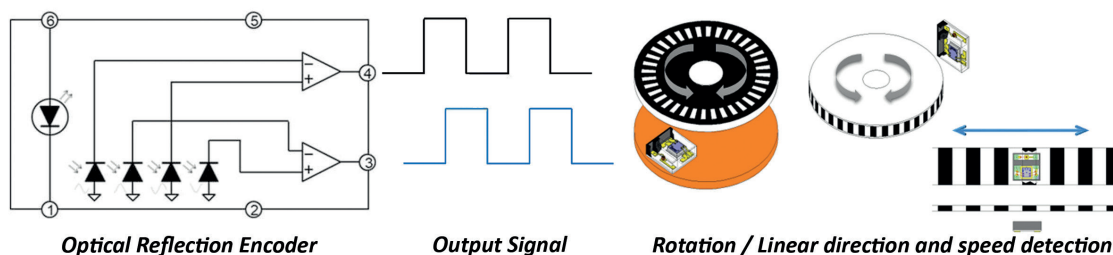

NEWS

Application example



The rotary encoders can be used in various industrial and consumer systems, here are some practical examples: robotic arms: to measure joint angles to ensure precise positioning and control. Conveyor systems: to track the rotation of conveyor rollers to monitor speed and position.

CNC machines: to provide feedback on tool position for precise machining. Volume and input dials: in audio equipment or other devices, encoders track

the rotation of control knobs for user input. Camera gimbals: optical encoders track motor positions for stabilized camera movements.

Conclusion

In conclusion, photo sensors are a vital component in modern technology, playing a pivotal role in driving innovation across industries. Nisshinbo micro devices has many years of experience developing optoelectronic devices and has a comprehensive portfolio of solutions available.

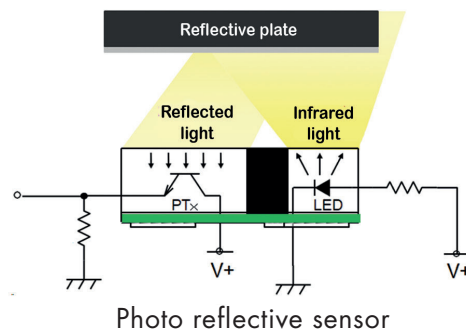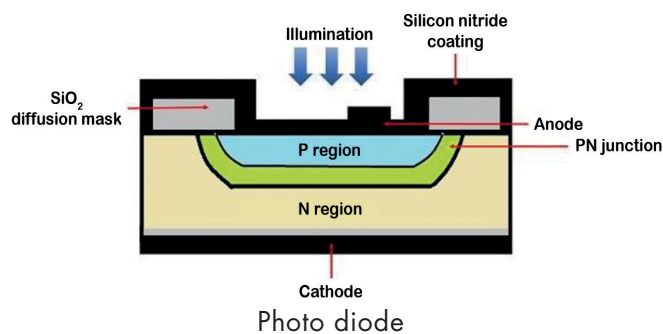

APPLICATIONS


- Robotic arms
- Conveyor systems
- CNC machines
- Volume and input dials
- Camera gimbals
- Solar trackers
- Machine vision systems
- Fitness equipment

FEATURES

- Miniature, thin package: L2.6 x W2.5 x H0.8 mm
- Digital two outputs type: A, B phases
- Incremental output type
- Operating temperature range: -30 °C to +105 °C
- Resolution NJL5821R / NJL5822R: 150 LPI / 180 LPI
- Pb free soldering re-flowing permitted: 255 °C, 2 times
- Halogen and lead free
- RoHS compliant

1700V SiC MOSFETs

The 1700V SiC MOSFETs has been especially tailored to minimize on-state resistance, provide superior switching performance, higher system efficiency, and faster operating frequency. These devices are well suited for high efficiency fast switching applications.

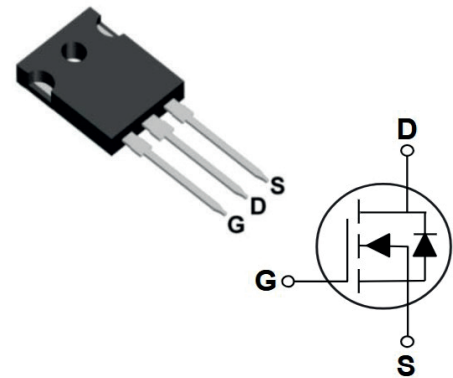

Maximum ratings $T_c=25^\circ\text{C}$ unless otherwise noted

SYMBOL	PARAMETER	RATING	UNITS
V_{DS}	Drain-source voltage	1700	V
$V_{GS(MAX)}$	Gate-source voltage	-10 / +25	V
$V_{GS(OP)}$	Gate-source voltage (recommended operational values)	-5 / +20	V
I_D	Drain current - continuous ($T_c=25^\circ\text{C}$)	70	A
	Drain current - continuous ($T_c=100^\circ\text{C}$)	45	A
I_{DM}	Drain current - pulsed (NOTE 1)	140	A
T_j	Operating junction temperature range	-55 to 150	$^\circ\text{C}$
T_{STG}	Storage temperature range	-55 to 150	$^\circ\text{C}$
MARKING CODE		SNAR070	

APPLICATIONS AREAS

- Solar inverters
- Switch mode power supplies, UPS
- High voltage DC/DC converters
- Motor drives

KEY FEATURES OF THE T3SNAR070

- $R_{DS(ON)} \leq 70\text{m}\Omega @ V_{GS}=20\text{V}$
- Low on-resistance
- High speed switching
- Green device available
- Lower capacitance
- Higher system efficiency
- Easy to parallel



Contact for information: Mr. Kinn · phone: +49 7452 6007-21 · e-mail: d.kinn@endrich.com



HEADQUARTERS

endrich Bauelemente Vertriebs GmbH
P.O.Box 1251 · 72192 Nagold,
Germany
T +49 7452 6007-0
E endrichnews@endrich.com
www.endrich.com

SALES OFFICES IN EUROPE

France
Paris:
T +33 1 86653215
france@endrich.com
Lyon:
T +33 1 86653215
france2@endrich.com

Spain
Barcelona:
+34 93 2173144
spain@endrich.com
Hungary
Budapest:
T +36 1 2974191
hungary@endrich.com

Austria & Slovenia
Gmunden:
+43 1 6652525
austria@endrich.com

Switzerland – Novitronic
Zurich:
T +41 44 30691-91
info@novitronic.ch

IMPRESSUM

Herausgeber: endrich Bauelemente Vertriebs GmbH, Hauptstr. 56, 72202 Nagold, Deutschland, Tel.: +49 7452 6007 0, Fax: +49 7452 6007 70, Mail: endrich@endrich.com, Web: www.endrich.com, Geschäftsführerin: Dr. Christiane Endrich, Sitz: Nagold, HRB Stuttgart 340213, VAT-Nr.: DE144367280, Konzept: endrich Bauelemente Vertriebs GmbH, Nachdruck, auch auszugsweise, nur mit schriftlicher Genehmigung der endrich Bauelemente Vertriebs GmbH. Alle Informationen und Angaben in diesem Heft wurden nach bestem Wissen und Gewissen erstellt, aber ohne jegliche Gewähr. Preisänderungen, Irrtümer, Satz- und Druckfehler vorbehalten. Stand 05.10.2023

Wenn Sie die endrich news nicht mehr per Post wünschen, schreiben Sie bitte eine E-Mail an newsletter@endrich.com

Certified acc. to ISO 9001:2015 / 14001:2015

