

DETAILS


Product Number	CN12718_LENA-S-DL
Family	Lena
Type	RefPack
Color	metal
Diameter	111 mm
Height	85,4 mm
Style	round
Optic Material	PC
Holder Material	PC
Fastening	screw
Status	production ready
ROHS Compliant	Yes
Date Updated	16/02/2015


OPTICAL PROPERTIES

LED	Viewing Angle	Light Beam	Effi- ciency	cd/lm	Connector
CLU710	9 deg	Spot	83 %	12.000	-
CLU720	11 deg	Spot	79 %	8.600	-
ZC12/18	12 deg	Spot	80 %	8.000	-
SLE G5 LES15	12 deg	Spot	82 %	8.400	LEDiL: LEDiL
CLL03x/CLU03x	13 deg	Spot	80 %	7.600	-
STARK SLE PURE G3 LES17	14 deg	Spot	80 %	6.930	-
CXM-14	14 deg	Spot	80 %	7.100	LEDiL: LEDiL



Relative intensity of CN12718_LENA-S-DL (CLL030-1208)

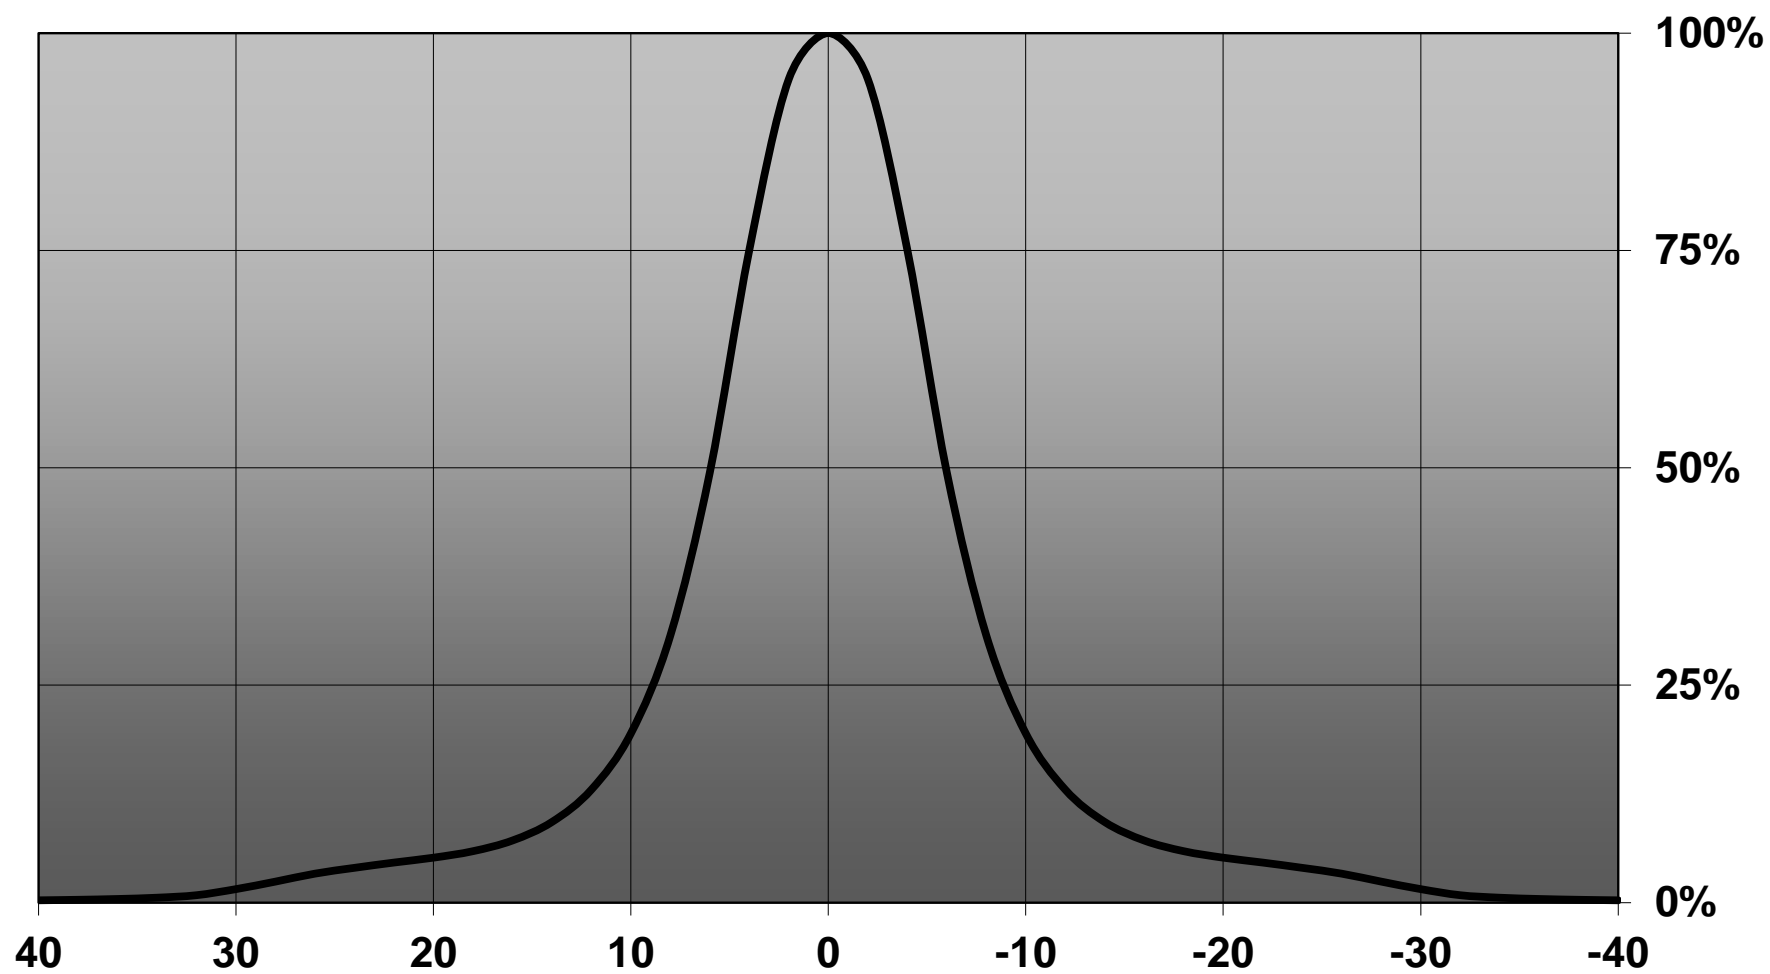

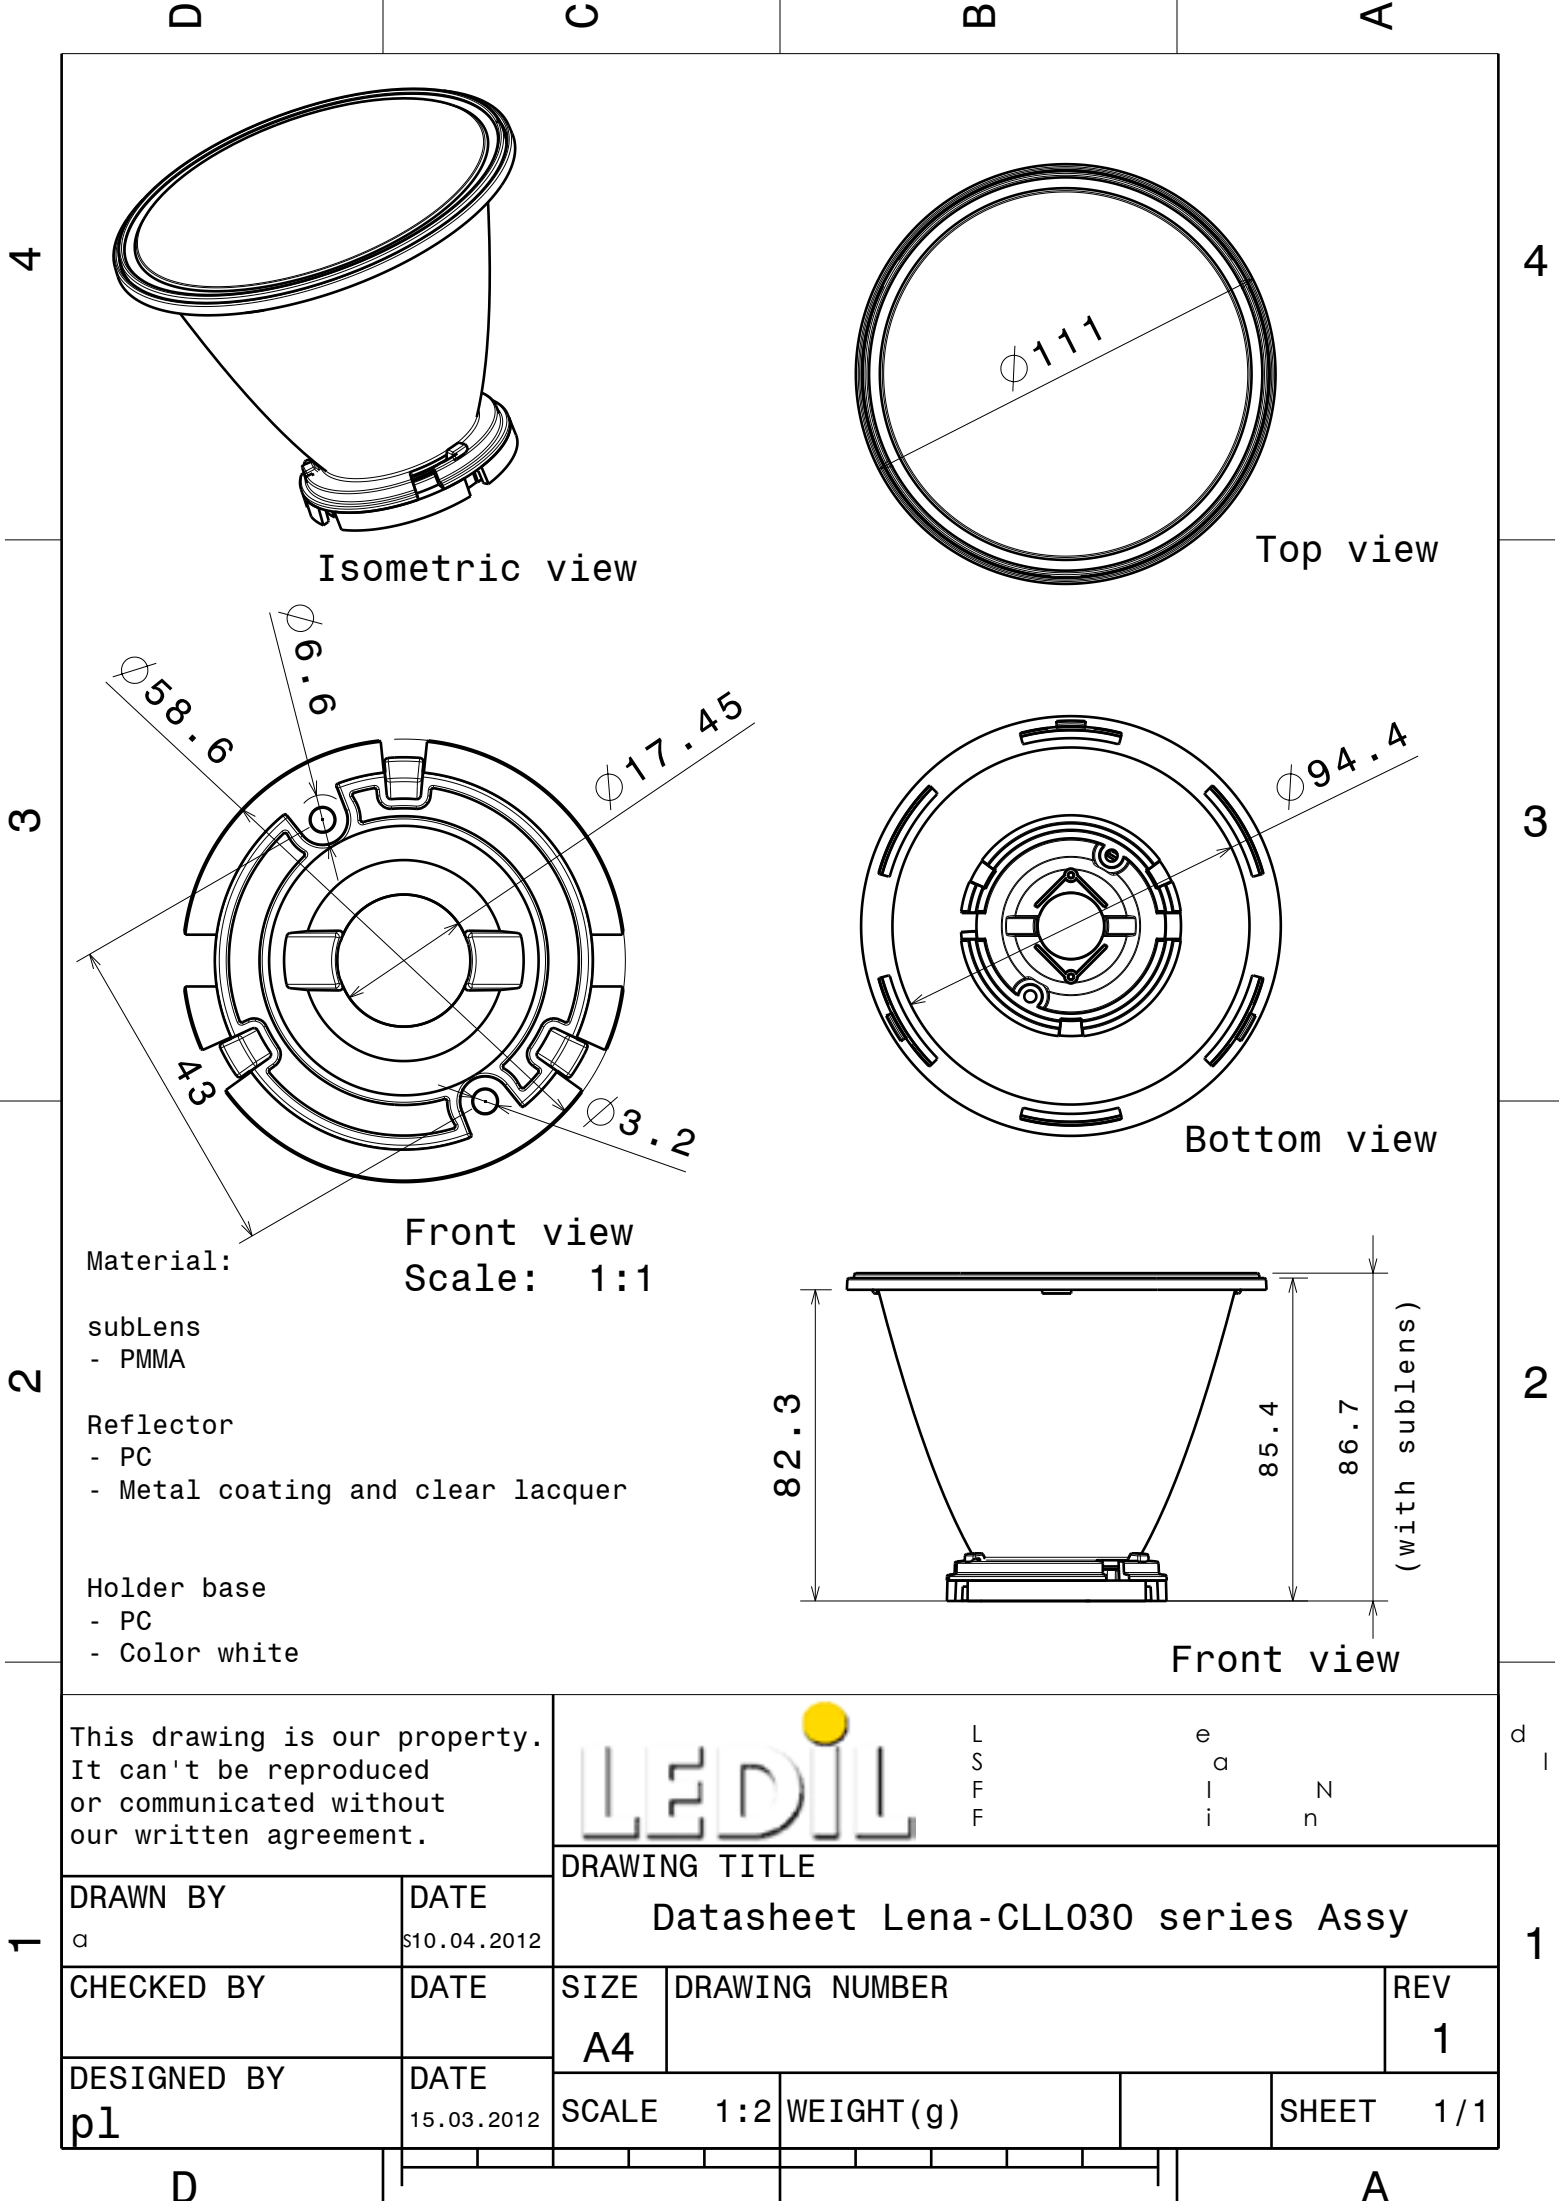

This drawing is our property.
It can't be reproduced
or communicated without
our written agreement.



L
S
F
F

e
a
i
n

d
i

DRAWING TITLE

Datasheet Lena-CLL030 series Assy

DRAWN BY

DATE

10.04.2012

CHECKED BY

DATE

SIZE

DRAWING NUMBER

REV

A4

1

DESIGNED BY

DATE

15.03.2012

SCALE

1:2


WEIGHT (g)

SHEET


1/1

pl


Luminaire: Ledil CN12718_LENA-S-DL_(CITIZEN_CLU710)
Lamps: 1 x CITIZEN_CLU710_(C12691_LENA-STD-BASE-CLL030)
_1194.84lm@250mA_P=8.35W_I=0.25A

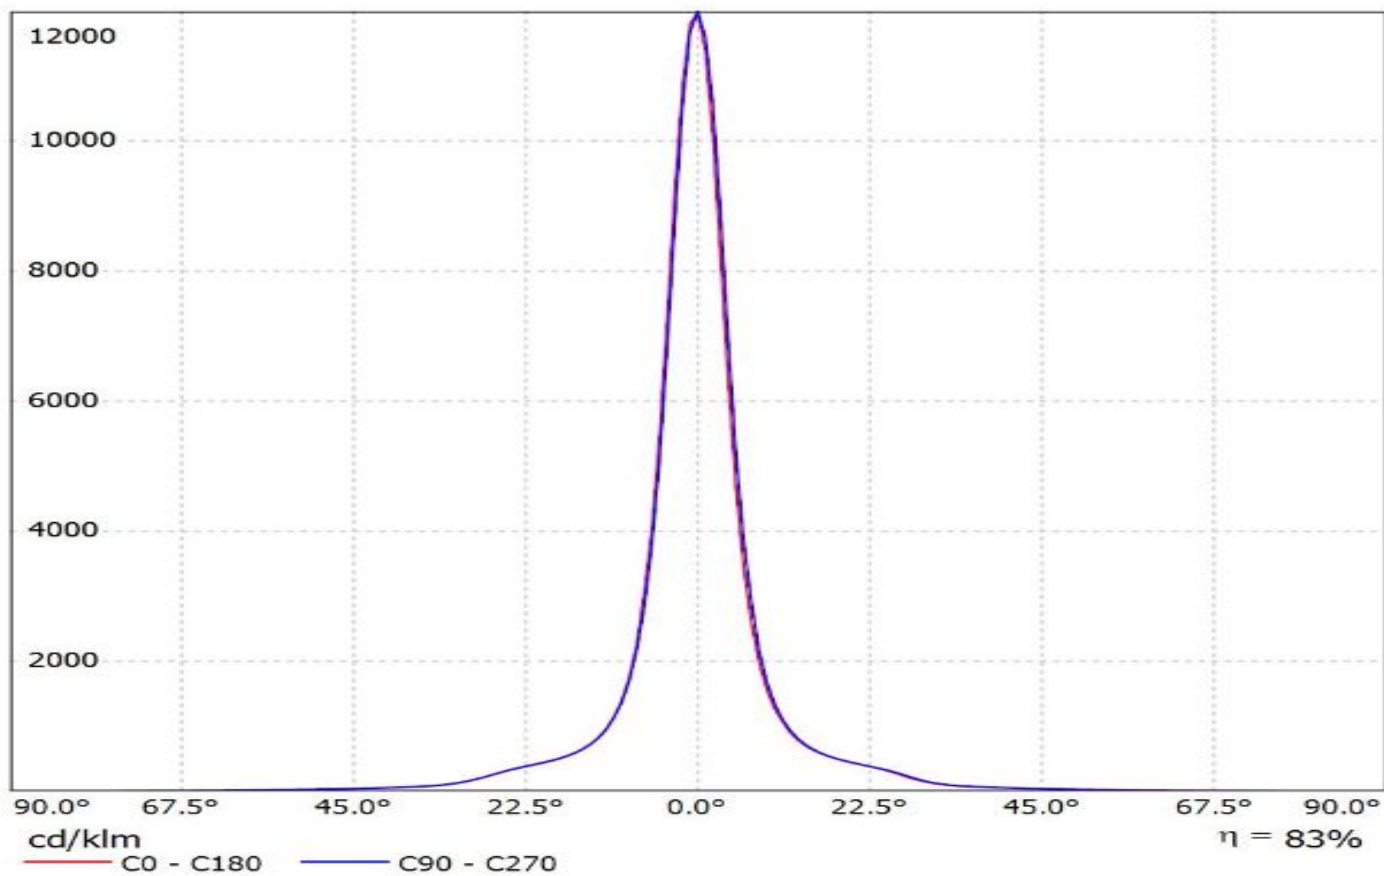


Luminaire: Ledil CN12718_LENA-S-DL_(CLU720)
Lamps: 1 x CITIZEN_CLU720_(CLU720-1206B8-273M2)
_1312.67lm@250mA_CCT=2700K_P=8.35W_I=0.25A

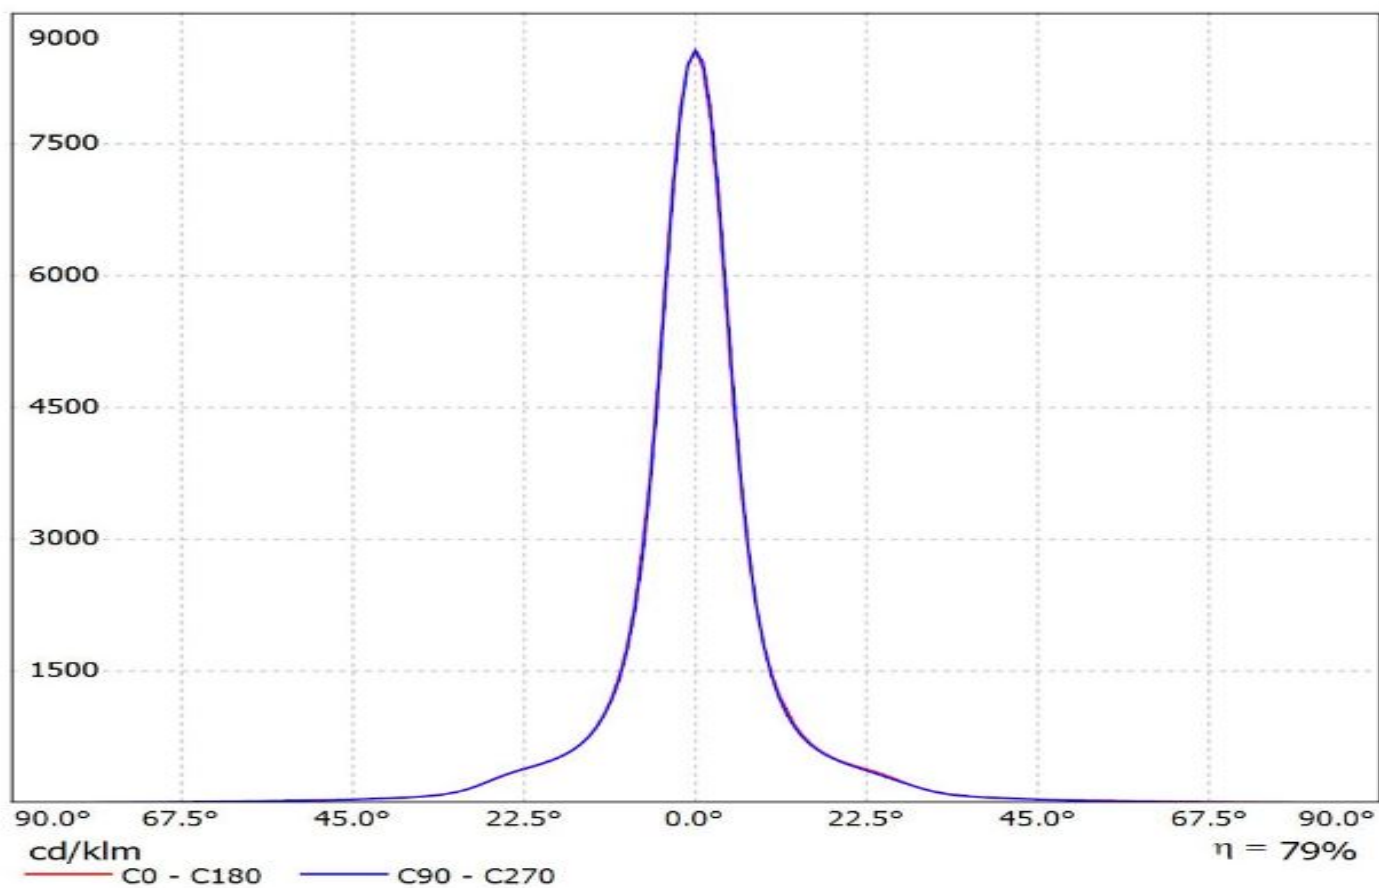

Luminaire: LEDiL Oy CN12718_LENA-S-DL_(ZC12) Eff.79.9%
Lamps: 1 x SEOUL_ZC12_(SDW82F1C)_1209.83lm@250mA_CCT=3000K_P=8.64658W_I=249.8mA

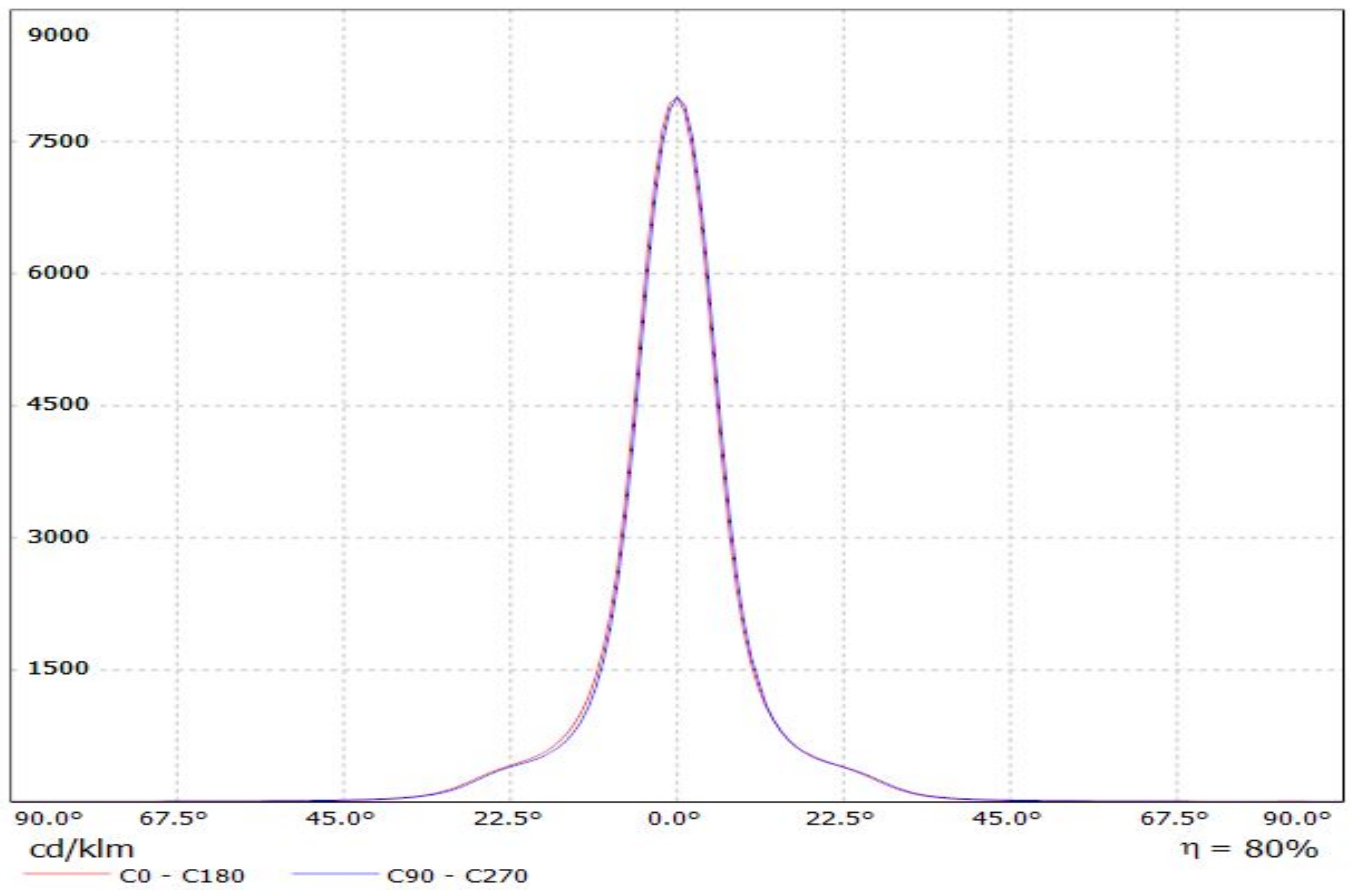


Luminaire: LEDiL Oy CN12718_LENA-S-DL_(SLE-G5_LES-15)
Lamps: 1 x Tridonic_SLE-G5_LES-15_1237.76lm@250mA_P=8.6698W_I=0.250A

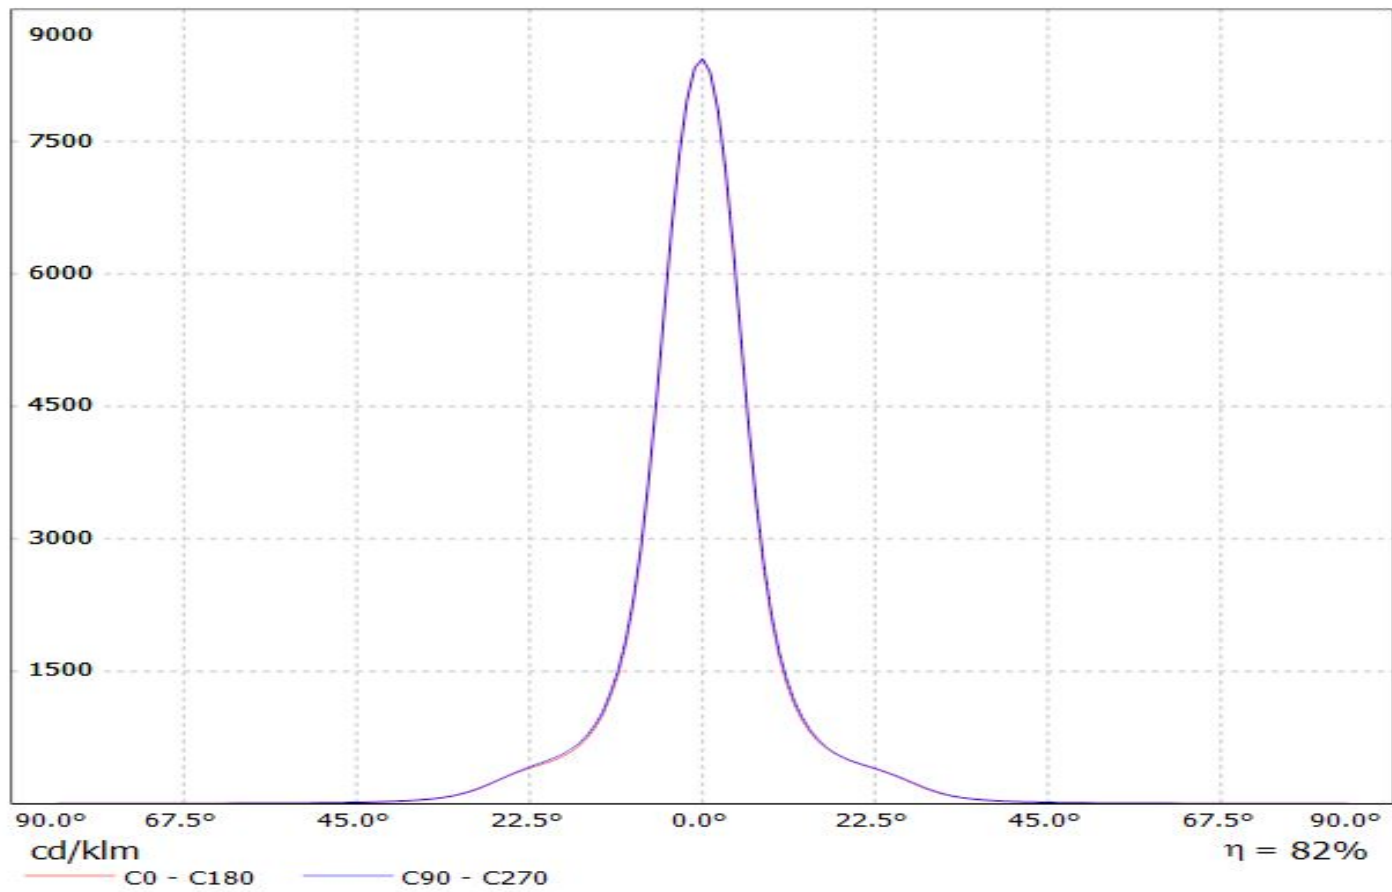


Luminaire: Ledil CN12718_LENA-S-DL_(CLU036)


Lamps: 1 x CLU036_(-1208C1-303M2G2)_1273.68lm@250mA_P=8.24W_I=0.25A

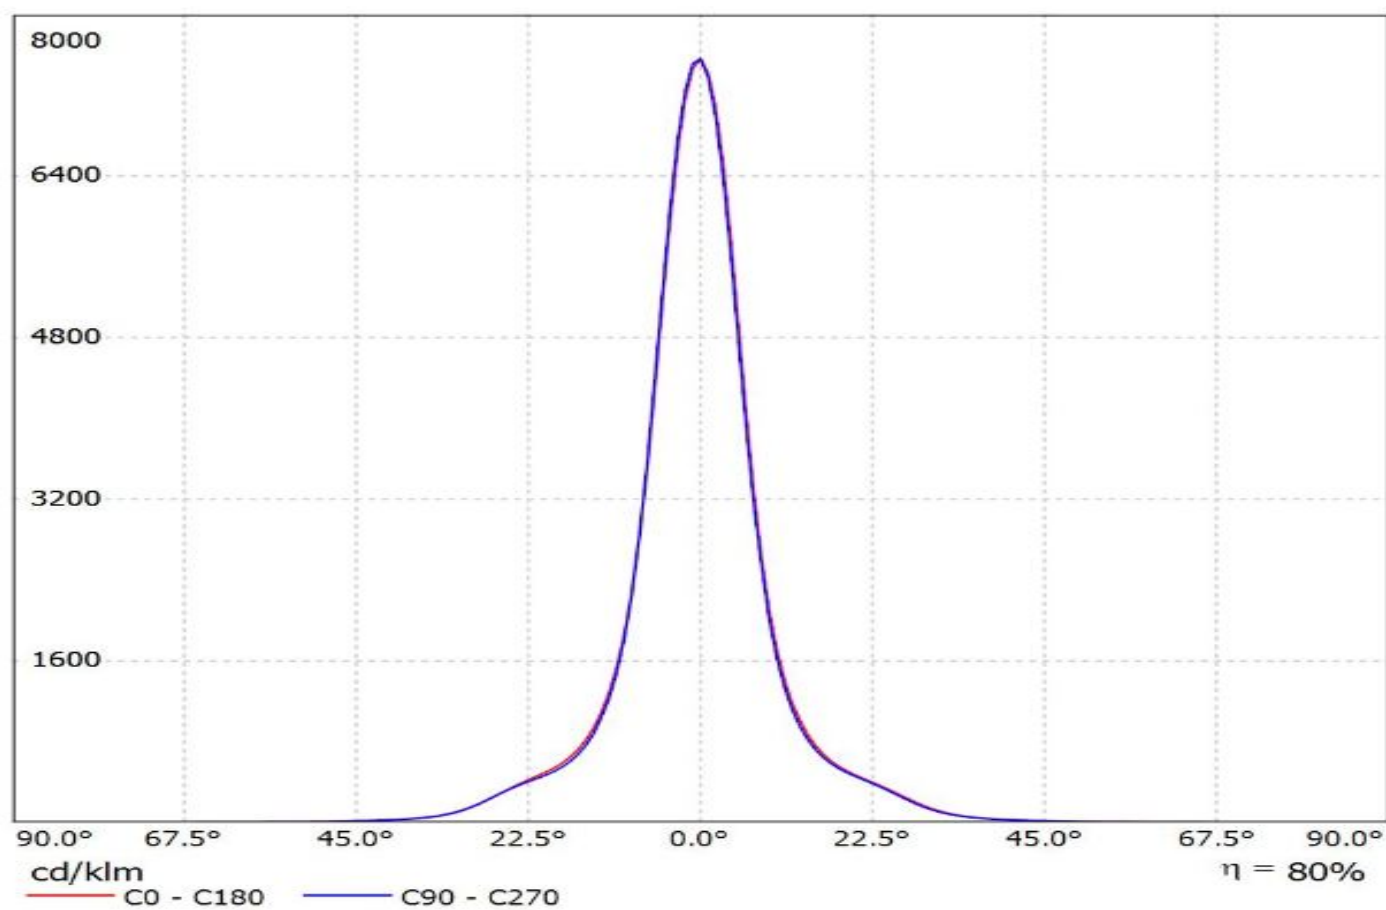


Luminaire: LEDiL Oy CN12718_LENA-S-DL (SLE_G3_LES17) Eff.80.2%
Lamps: 1 x TRIDONIC_STARK_SLE_G3_LES17_(STARK-SLE-PURE_G3-17-2000-840-CLA)_1011.62lm@250mA_P=8.29243W_I=249.9mA

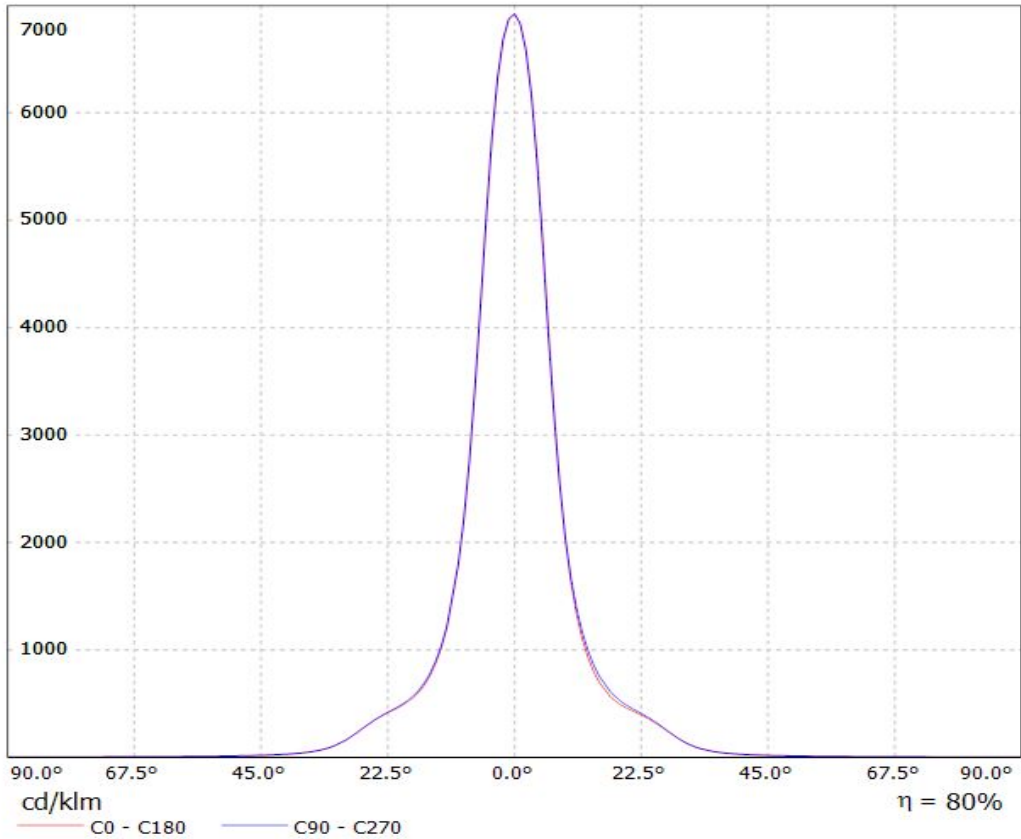


Luminaire: LEDil Oy CN12718_LENA-S-DL_(CXM-14)
Lamps: 1 x Luminus CXM-14 (1006.41lm @ 250mA) CCT=3100K P=8.5W I=250mA

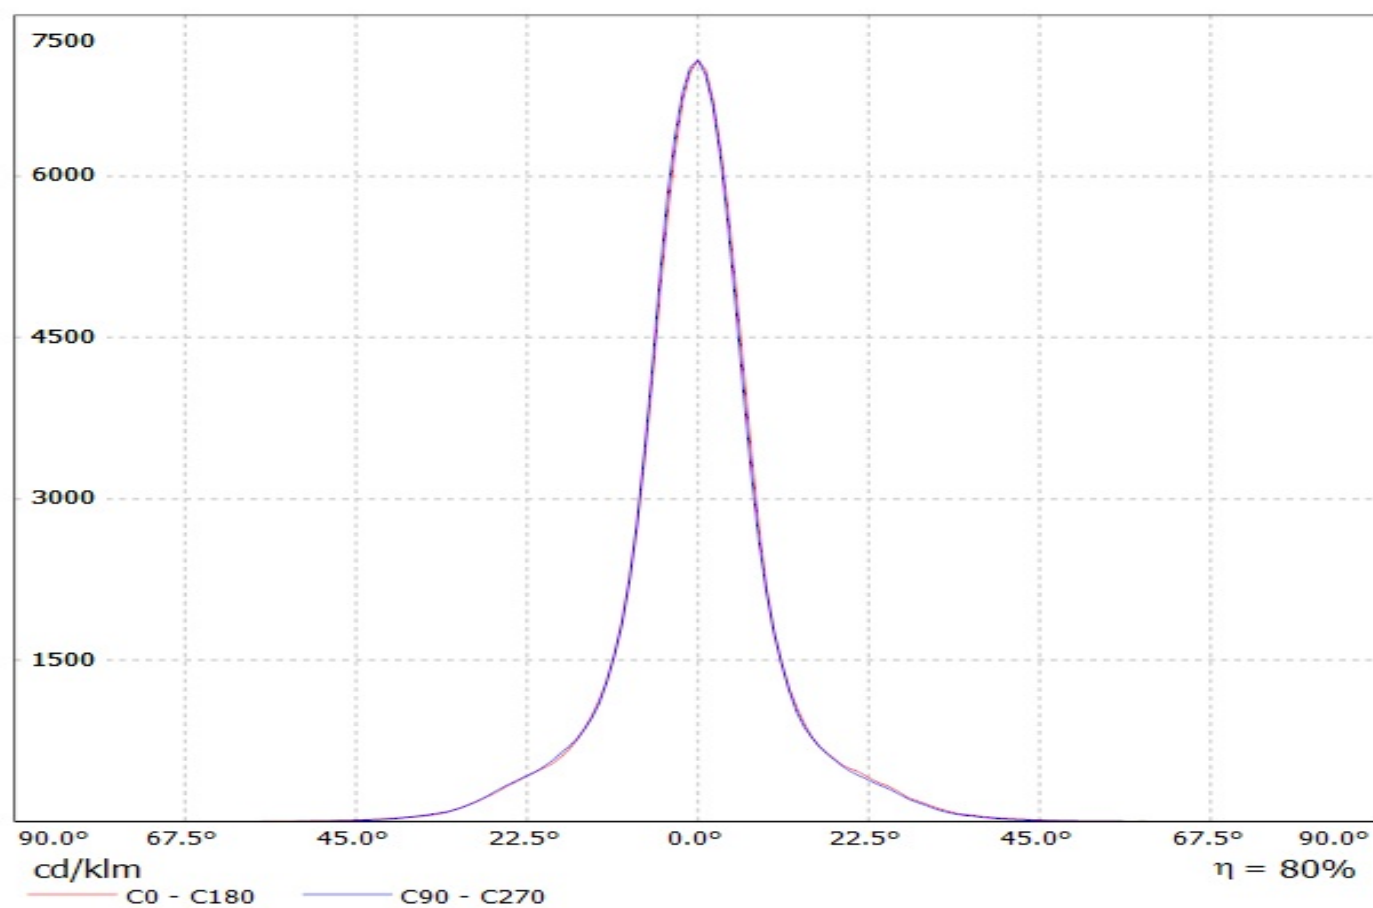

Luminaire: Ledil CN12718_LENA-S-DL_(CITIZEN_CLU710)
Lamps: 1 x CITIZEN_CLU710_(C12691_LENA-STD-BASE-CLL030)
_1194.84lm@250mA_P=8.35W_I=0.25A

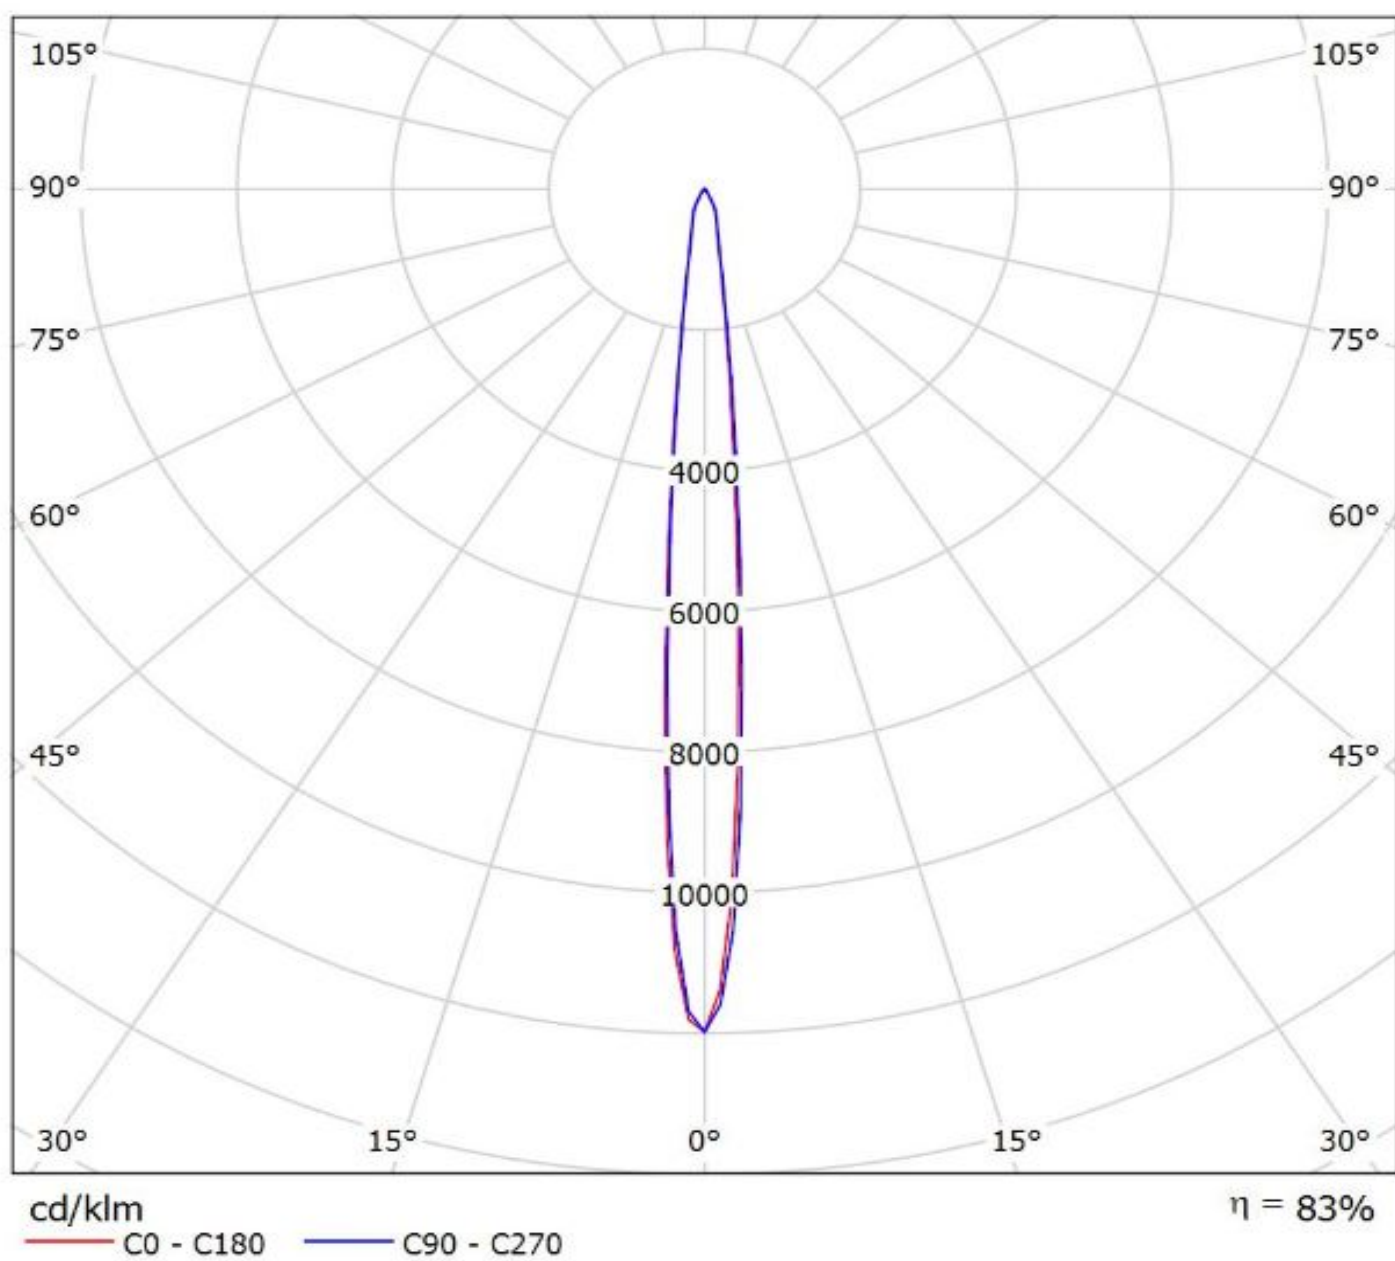

Luminaire: Ledil CN12718_LENA-S-DL_(CLU720)
Lamps: 1 x CITIZEN_CLU720_(CLU720-1206B8-273M2)
_1312.67lm@250mA_CCT=2700K_P=8.35W_I=0.25A

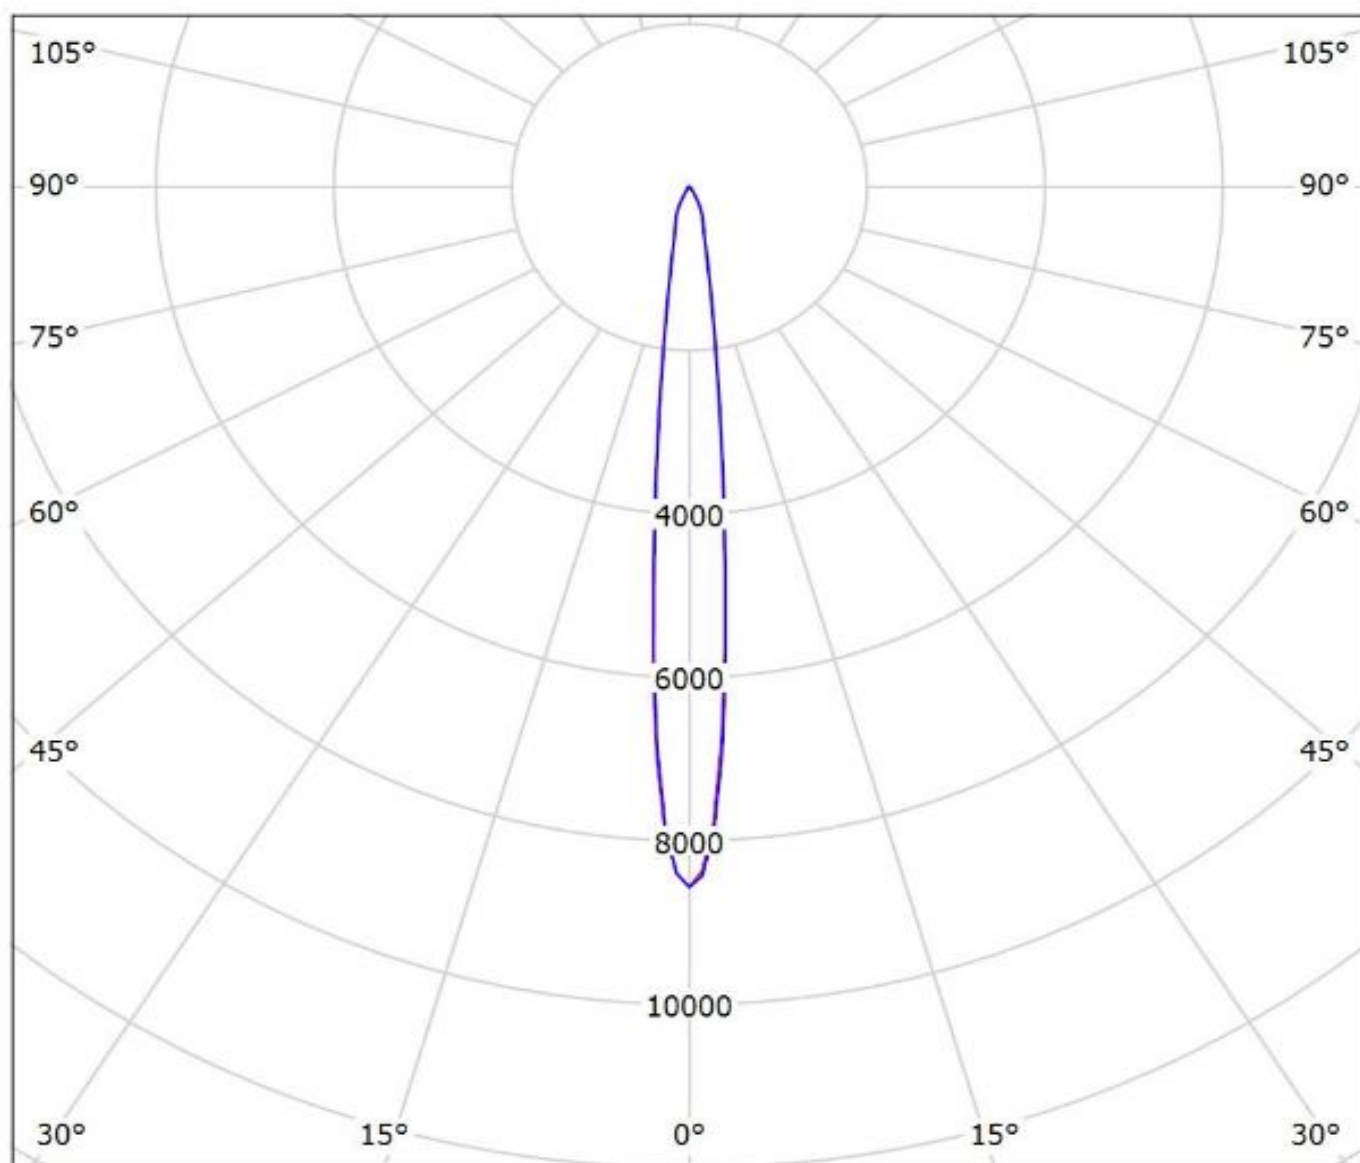


cd/klm

— C0 - C180 — C90 - C270


$\eta = 79\%$

Luminaire: LEDiL Oy CN12718_LENA-S-DL_(ZC12) Eff.79.9%
Lamps: 1 x SEOUL_ZC12_(SDW82F1C)_1209.83lm@250mA_CCT=3000K_P=8.64658W_I=249.8mA

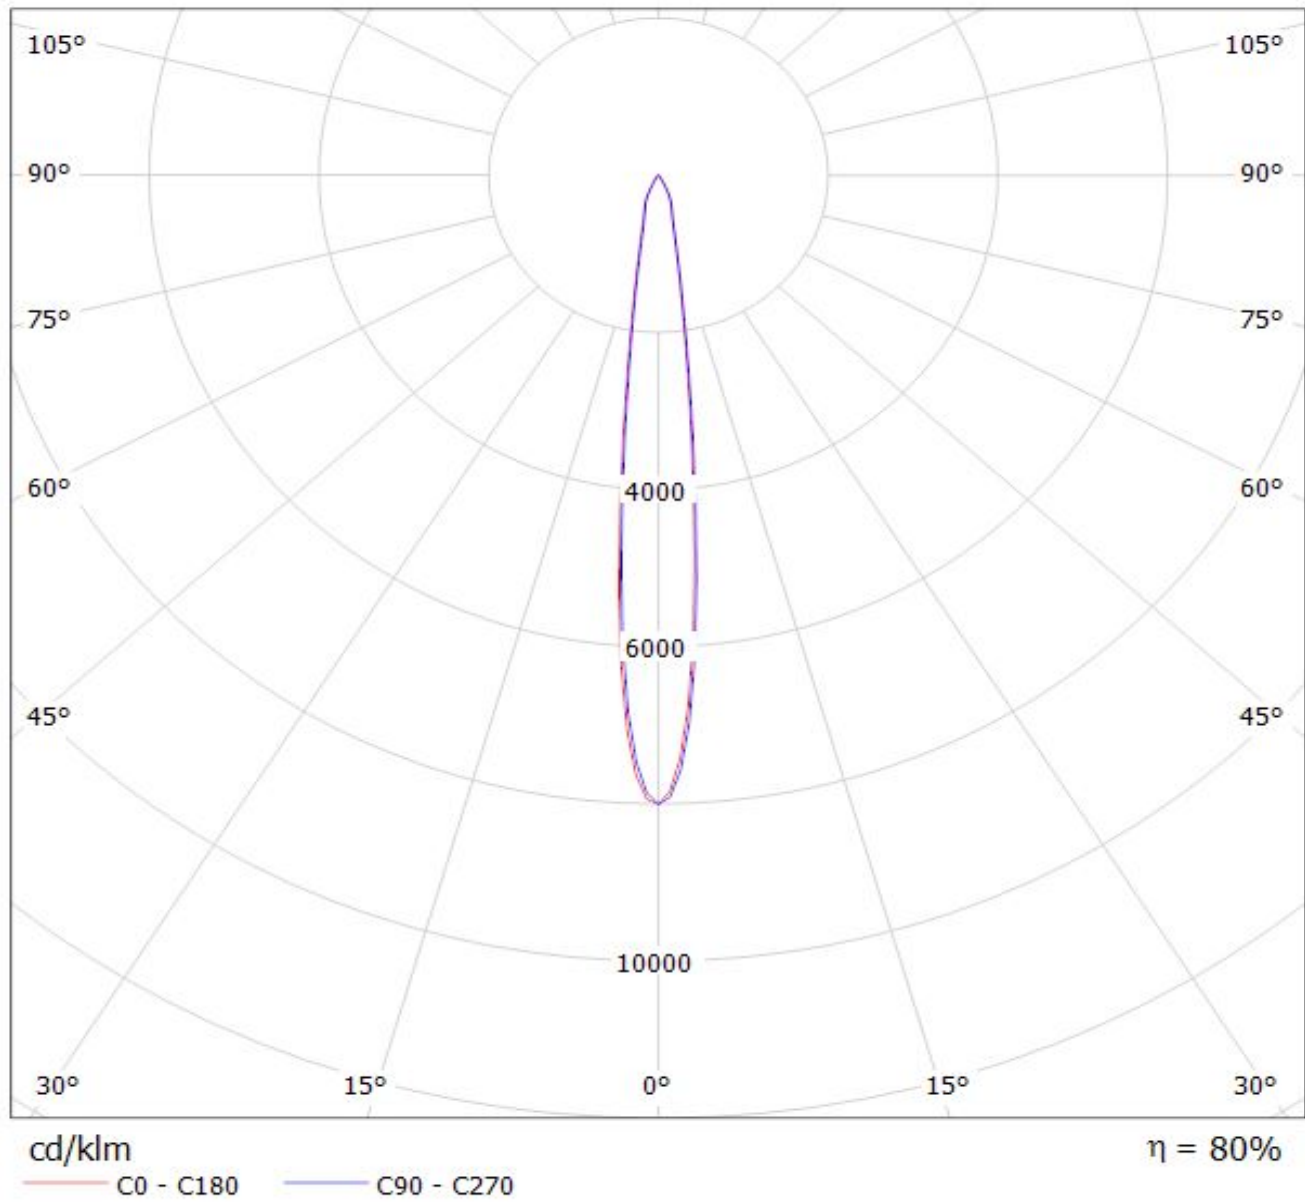


Luminaire: LEDiL Oy CN12718_LENA-S-DL_(SLE-G5_LES-15)

Lamps: 1 x Tridonic_SLE-G5_LES-15_1237.76lm@250mA_P=8.6698W_I=0.250A

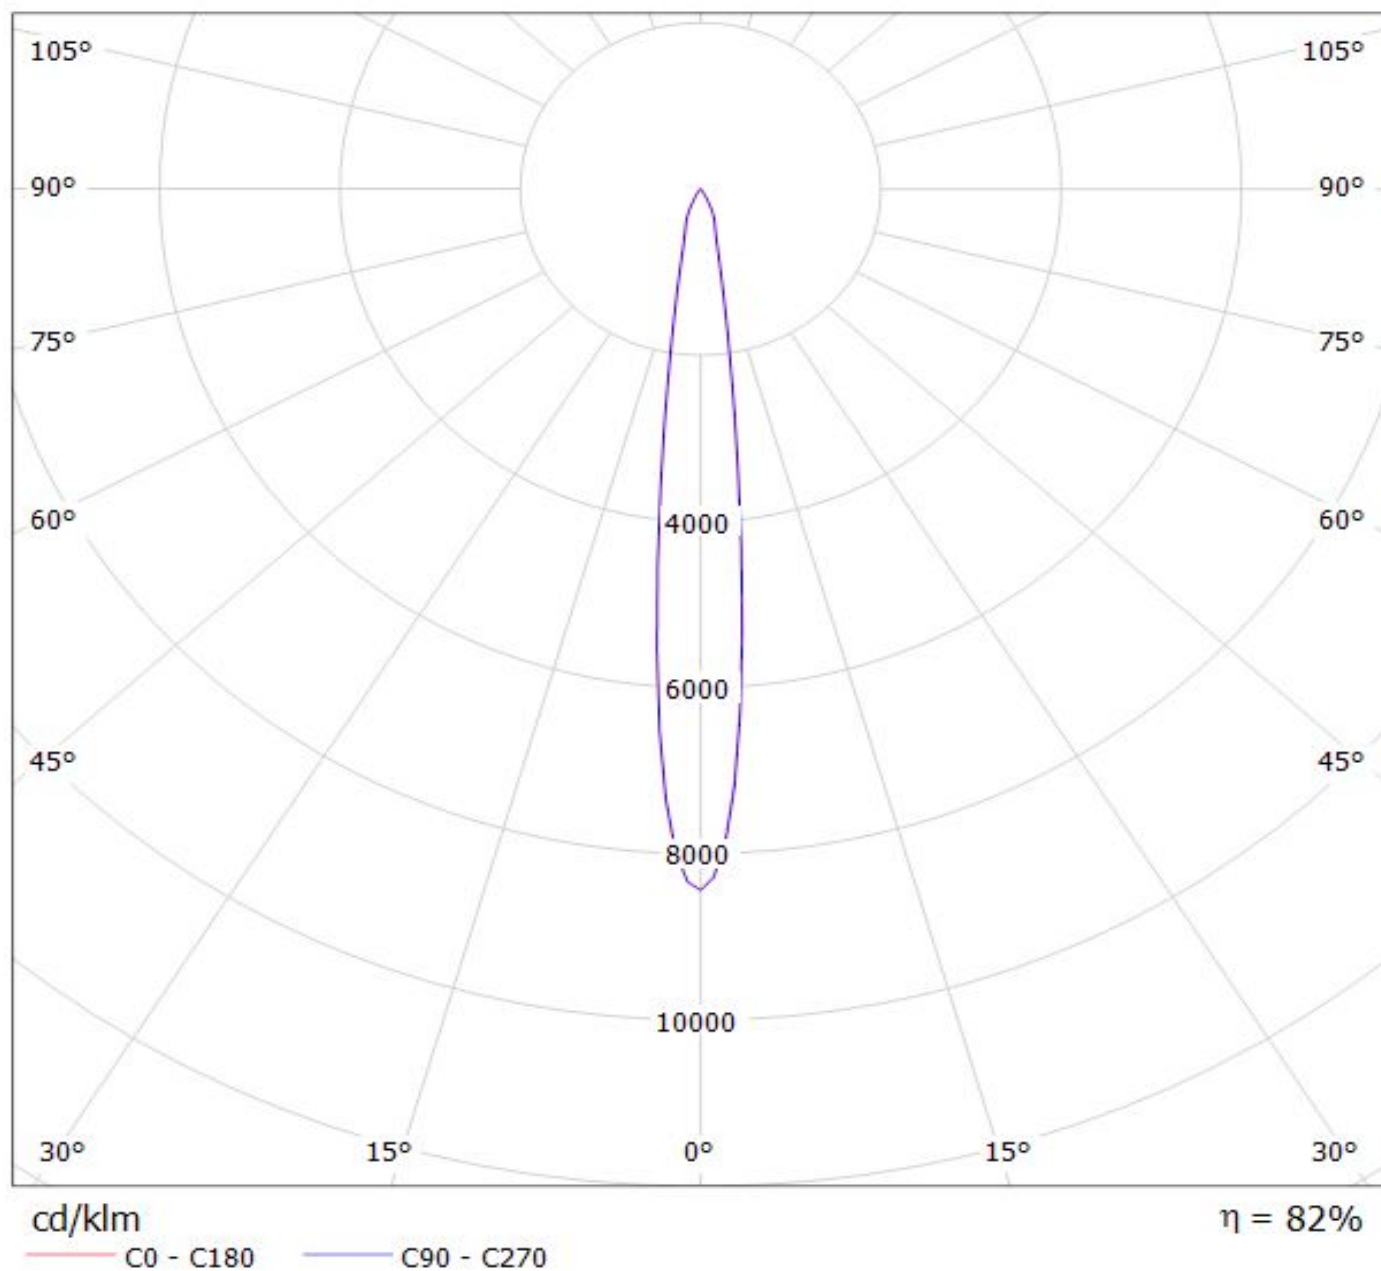

Luminaire: Ledil CN12718_LENA-S-DL_(CLU036)

Lamps: 1 x CLU036_(-1208C1-303M2G2)_1273.68lm@250mA_P=8.24W_I=0.25A

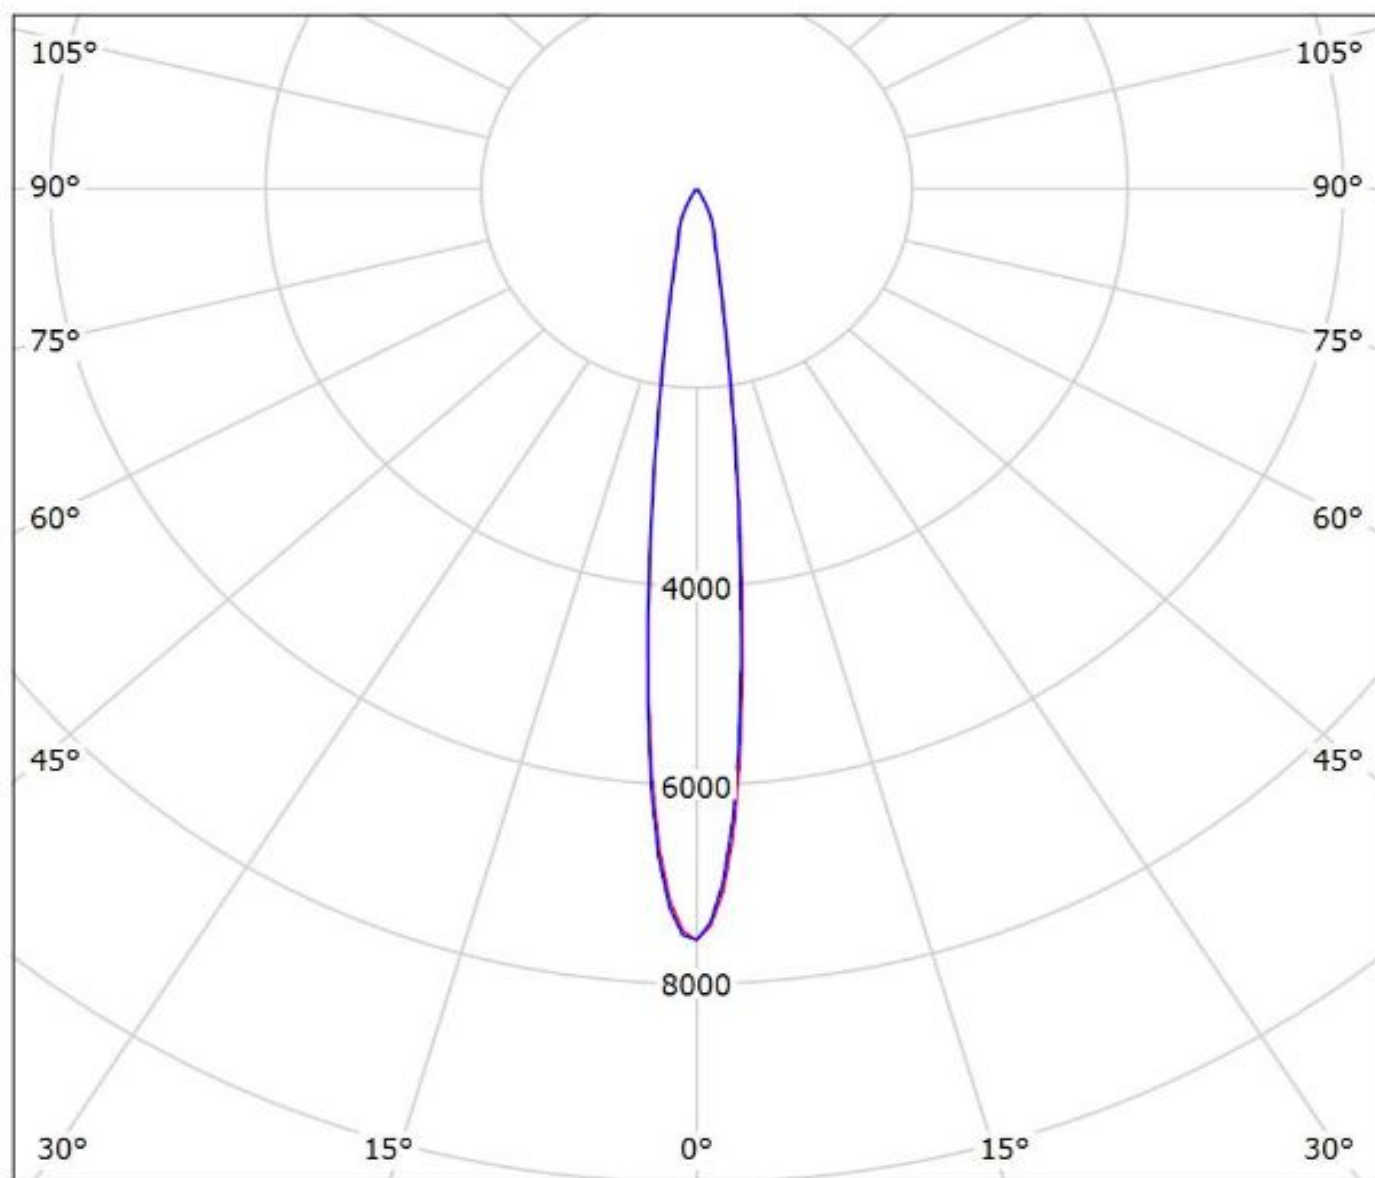


cd/klm

— C0 - C180 — C90 - C270

$\eta = 80\%$


Luminaire: LEDiL Oy CN12718_LENA-S-DL_(SLE_G3_LES17) Eff.80.2%

Lamps: 1 x TRIDONIC_STARK_SLE_G3_LES17_(STARK-SLE-PURE_G3-17-2000-840-CLA)_1011.62lm@250mA_P=8.29243W_I=249.9mA

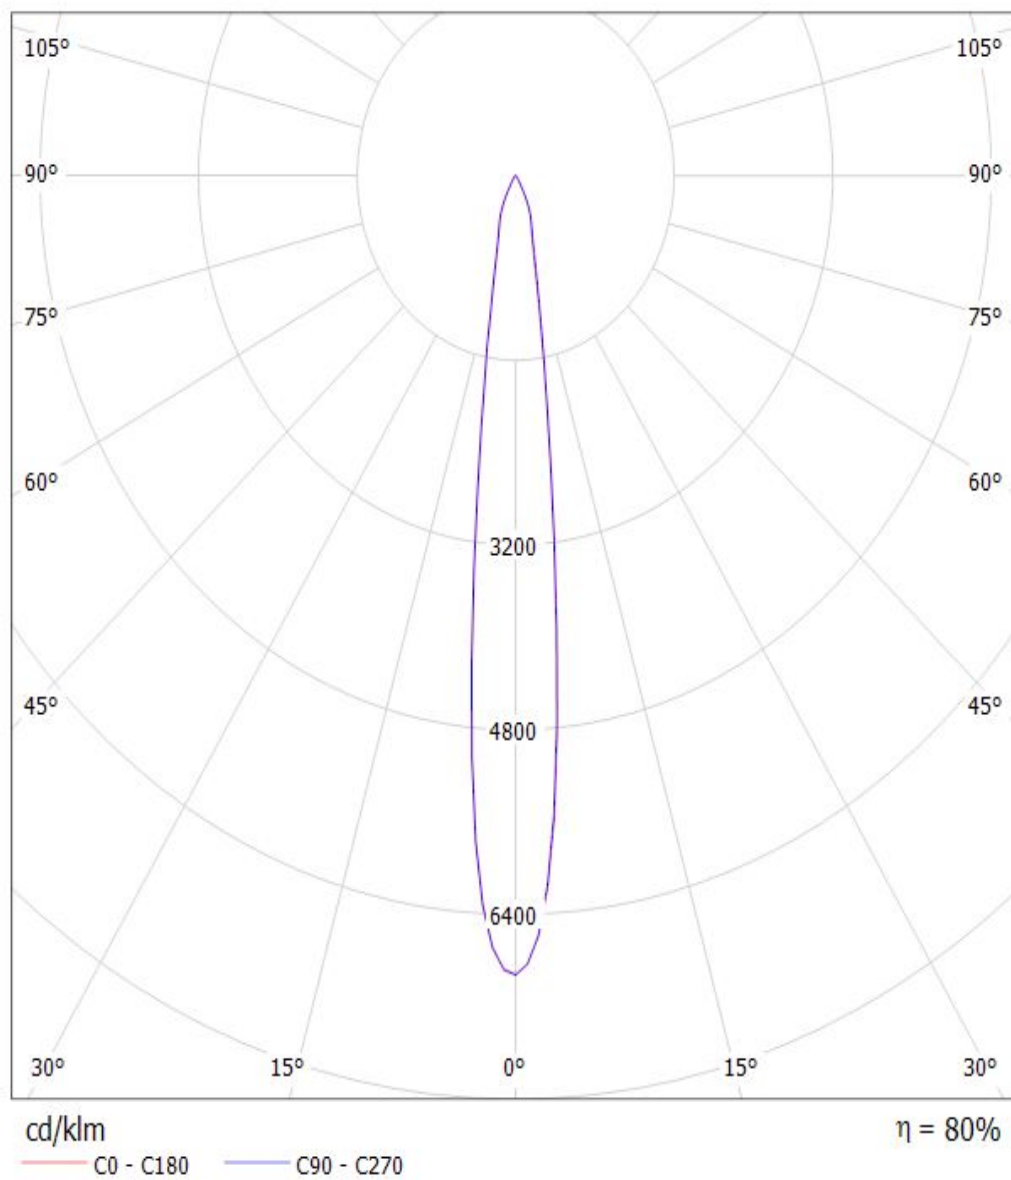

Luminaire: LEDil Oy CN12718_LENA-S-DL_(CXM-14)

Lamps: 1 x Luminus CXM-14 (1006.41lm @ 250mA) CCT=3100K P=8.5W I=250mA

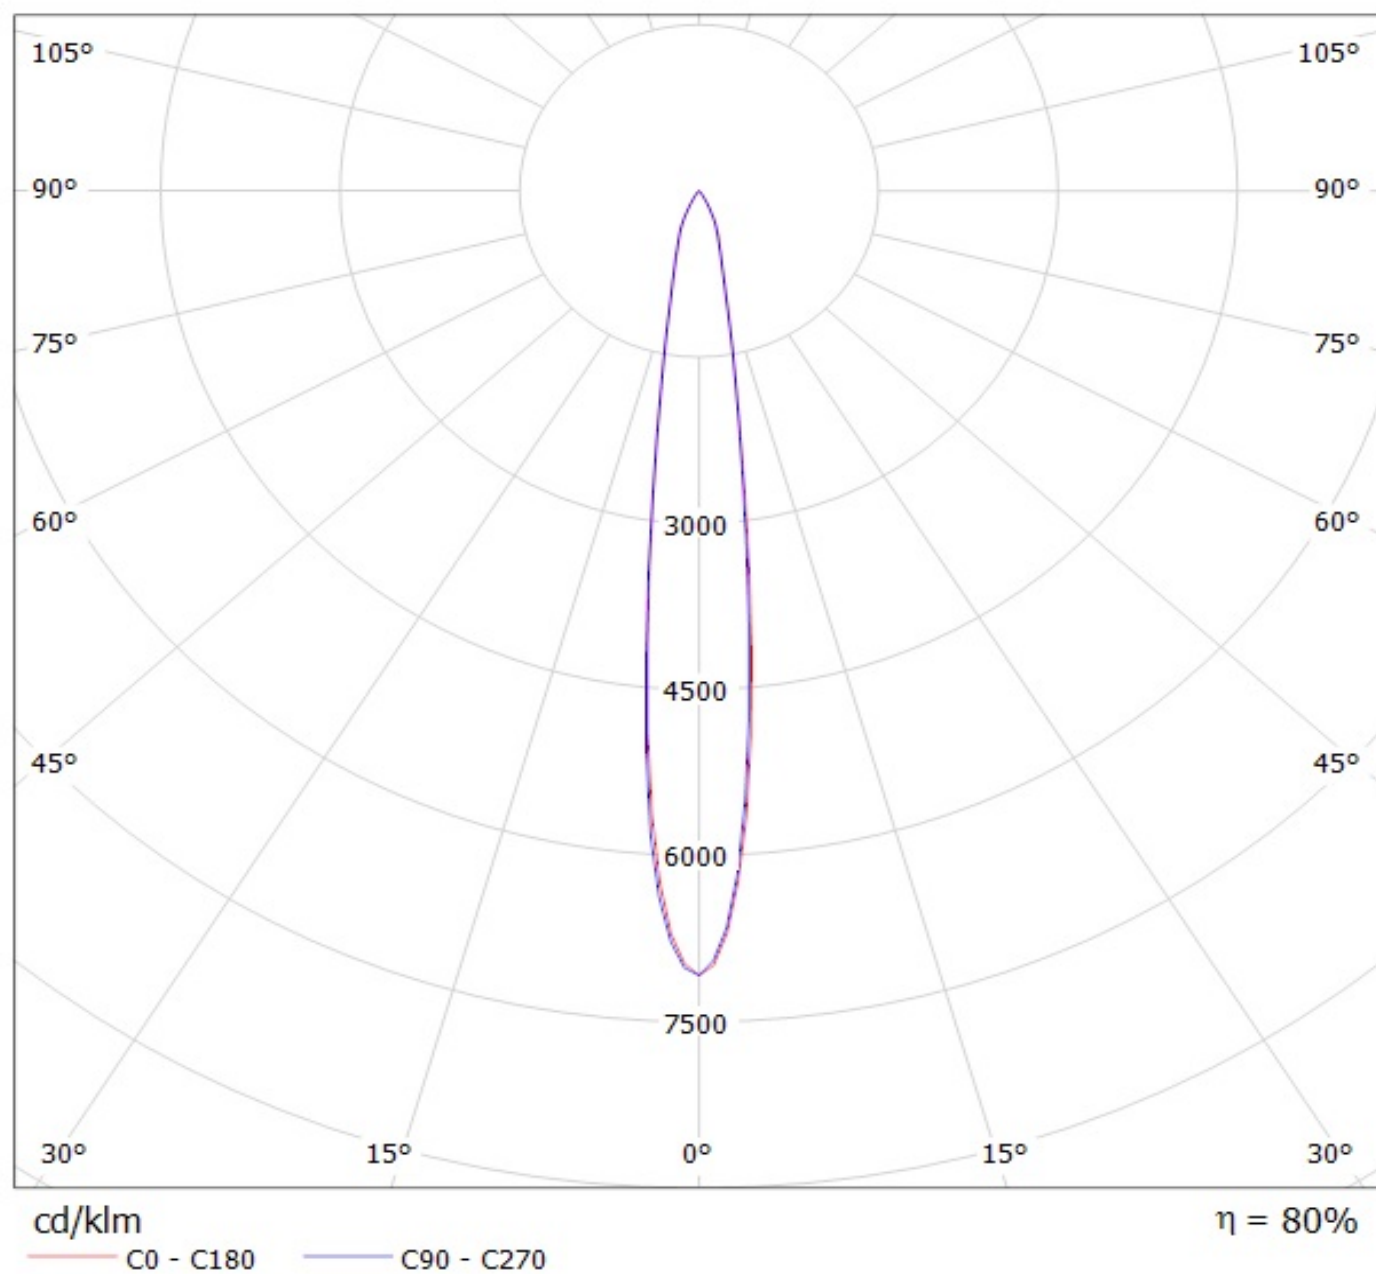

NOTE: The typical divergence will be changed by different color, chip size and chip position tolerance. The typical total divergence is the full angle measured where the luminous intensity is half of the peak value.

GENERAL INFORMATION

- Product series especially designed & optimized for series of LEDs.
- Special care taken to make light distribution as uniform as possible.

Note! Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.