



EBRP5L250D



Excellent Schottky Barrier Rectifiers



DO-201AD

Primary Characteristics		
I_F	5	A
V_{RRM}	250	V
I_{FSM}	100	A
V_F	0.9	V
T_J max	150	°C

Features
<ul style="list-style-type: none"> • High current capability • High surge current capability • Low reverse current • Component in accordance to RoHS 2002/95/EC

Mechanical Data
• Cases: DO-201AD
• Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0
• Terminals: Lead free Plating (Tin Finish) Solderable per MIL-STD-202, Method 208
• Polarity: Cathode Band
• Weight: 1.071 grams (approximate)

Ordering Information			
Part No.	Remark	Package	Packing
EBRP5L250D	General	DO-201AD	1200 / Ammo Box
EBRP5L250D-H	Halogen Free		

Maximum Ratings (TA=25°C unless otherwise noted)			
PARAMETER	SYMBOL	EBRP5L250D	UNIT
Maximum repetitive peak reverse voltage	V_{RRM}	250	V
Maximum RMS voltage	V_{RMS}	175	V
Maximum DC blocking voltage	V_{DC}	250	V
Maximum average forward rectified current	I_F	5.0	A
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load	I_{FSM}	5.0	A
Maximum Instantaneous Forward Voltage IF=3A @ 25°C IF=5A @ 25°C	V_F	0.80 Typ. 0.90 Max.	V
Maximum DC Reverse Current @ TA=25°C at Rated DC Blocking Voltage @ TA=125°C	I_R	0.2 5	mA
Typical Junction Capacitance(NOTE1)	C_j	65	pF
Typical Thermal Resistance	$R_{\theta JC}$	30	°C/W
Operating Temperature Range	T_J	-55 to +150	°C
Storage Temperature Range	T_{STG}	-55 to +150	°C
Marking Code		P5L250D · 5L250D	

NOTES:

1. Measured at 1.0MHZ and applied reverse voltage of 4.0V DC



Excellent Schottky Barrier Rectifiers

Rating and Characteristics Curves

FIG. 1-Typical Forward Current Derating Curve

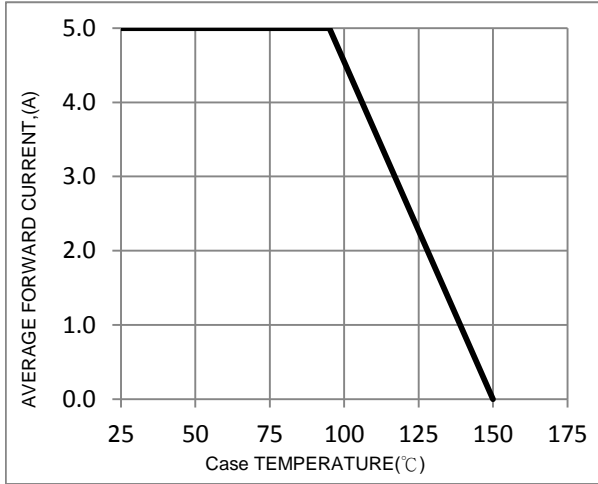


FIG. 2-Typical Forward Characteristics

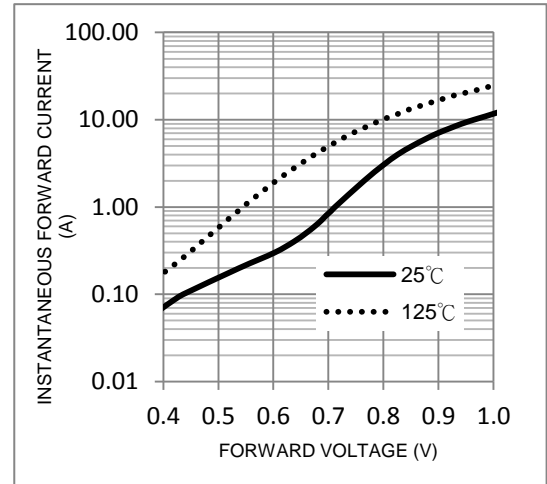


FIG. 3-Maximum Non-Repetitive Forward Surge Current

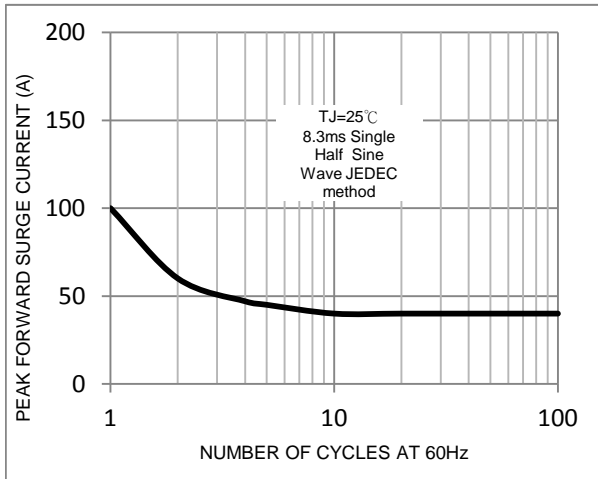


FIG. 4-Typical Reverse Characteristics


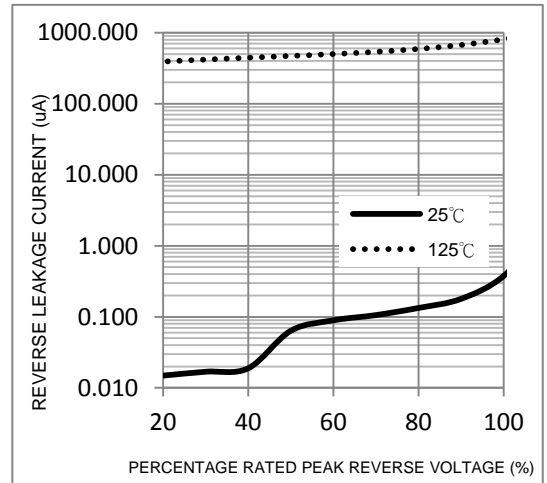



FIG. 5-Typical Junction Capacitance



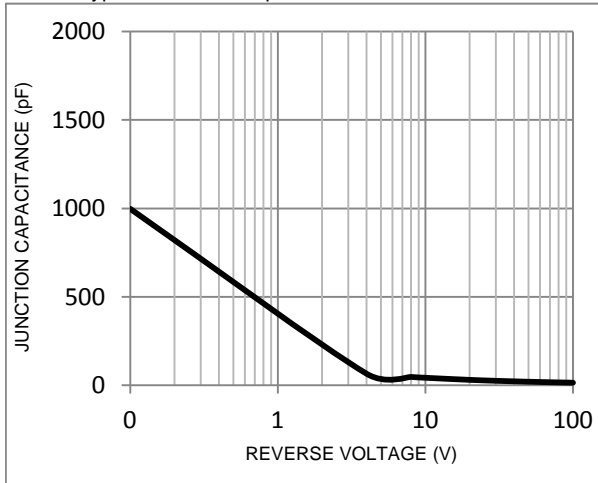

**Excellent Schottky
Barrier Rectifiers**

Package Outline Dimensions

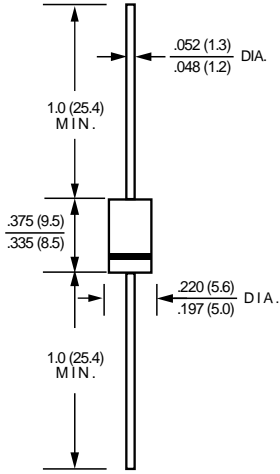

DO-201AD

Dimensions in inches and (millimeters)

Marking Information



Ammo Box Packing

Package	Inner	BOX	Inner Box	Carton	Carton Size	Gross Weight
	Pack	(EA)	(mm)	(EA)	(mm)	(Kg)-Approx.
DO-201AD(DO-27)-52mm	Reel	1,200	255x75x150	12000	440x280x335	16