



# EBRT3E200D



## Excellent Schottky Barrier Rectifiers



DO-201AD

Primary Characteristics		
$I_F$	3	A
$V_{RRM}$	200	V
$I_{FSM}$	80	A
$V_F$	0.77	V
$T_J$ max	150	°C

### Features

- High current capability
- High surge current capability
- Low reverse current
- Component in accordance to RoHS 2002/95/EC

### Mechanical Data

- Cases: DO-201AD
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0
- Terminals: Lead free Plating (Tin Finish)  
Solderable per MIL-STD-202, Method 208
- Polarity: Cathode Band
- Weight: 1.071 grams (approximate)

### Ordering Information

Part No.	Remark	Package	Packing
EBRT3E200D	General	DO-201AD	1200 / Ammo Box
EBRT3E200D-H	Halogen Free		

### Maximum Ratings (TA=25°C unless otherwise noted)

PARAMETER	SYMBOL	EBRT3E200D	UNIT
Maximum repetitive peak reverse voltage	$V_{RRM}$	200	V
Maximum RMS voltage	$V_{RMS}$	140	V
Maximum DC blocking voltage	$V_{DC}$	200	V
Maximum average forward rectified current	$I_F$	3.0	A
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load	$I_{FSM}$	80.0	A
Maximum Instantaneous Forward Voltage $I_F=3A @ 25^\circ C$	$V_F$	0.77	V
Maximum DC Reverse Current @ TA=25°C at Rated DC Blocking Voltage @ TA=100°C	$I_R$	0.2 10	mA
Typical Junction Capacitance(NOTE1)	$C_j$	670	pF
Typical Thermal Resistance	$R_{\theta JC}$	20	°C/W
Operating Temperature Range	$T_J$	-55 to +150	°C
Storage Temperature Range	$T_{STG}$	-55 to +150	°C
Marking Code		T3E200D · 3E200D	

### NOTES:

1. Measured at 1.0MHZ and applied reverse voltage of 4.0V DC



## Excellent Schottky Barrier Rectifiers

### Rating and Characteristics Curves

FIG. 1-Typical Forward Current Derating Curve

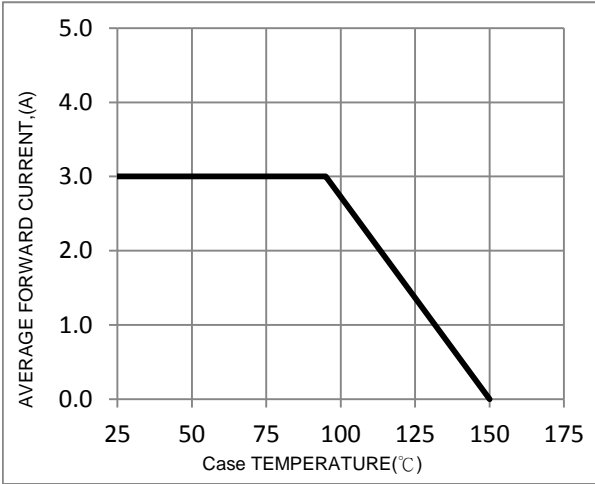


FIG. 2-Typical Forward Characteristics

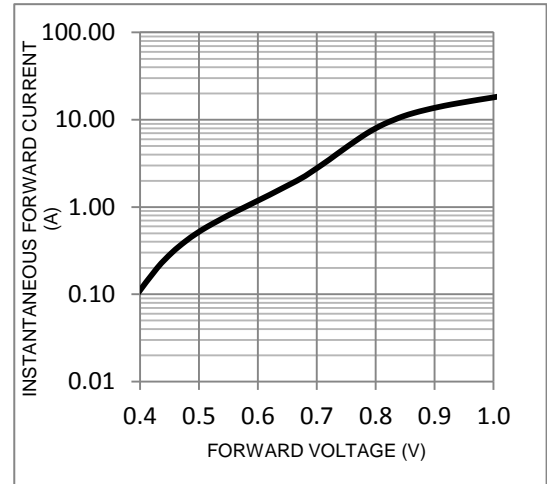


FIG. 3-Maximum Non-Repetitive Forward Surge Current

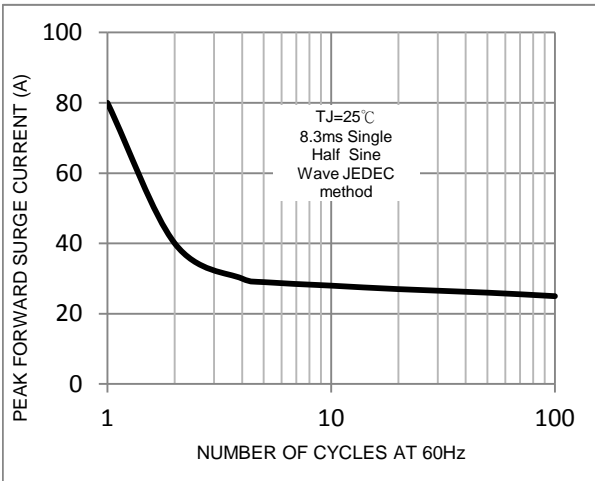


FIG. 4-Typical Reverse Characteristics



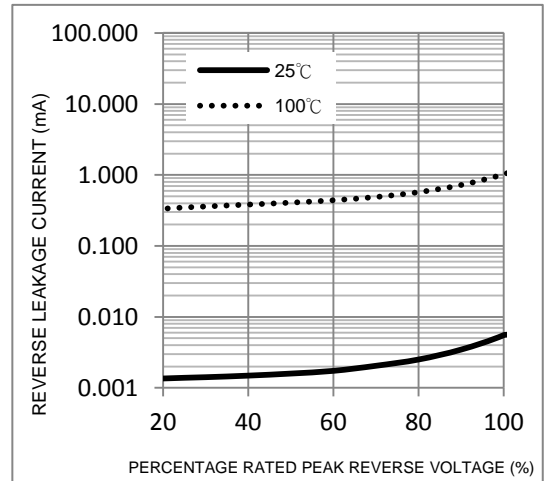


FIG. 5-Typical Junction Capacitance



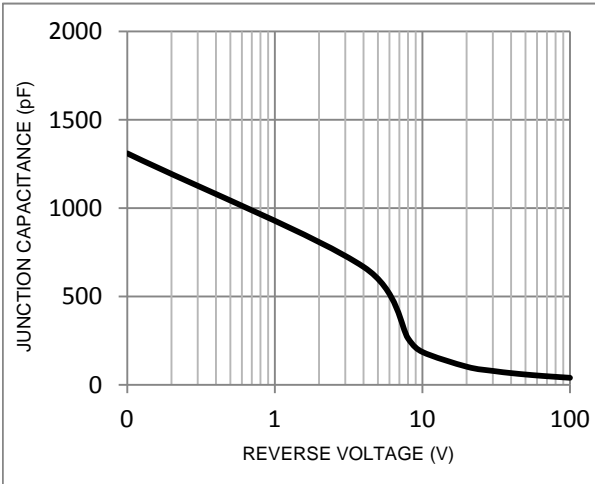


**Package Outline Dimensions**

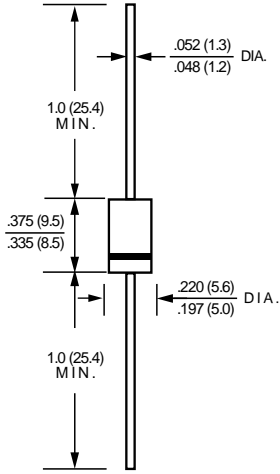

**DO-201AD**

Dimensions in inches and (millimeters)

**Marking Information**

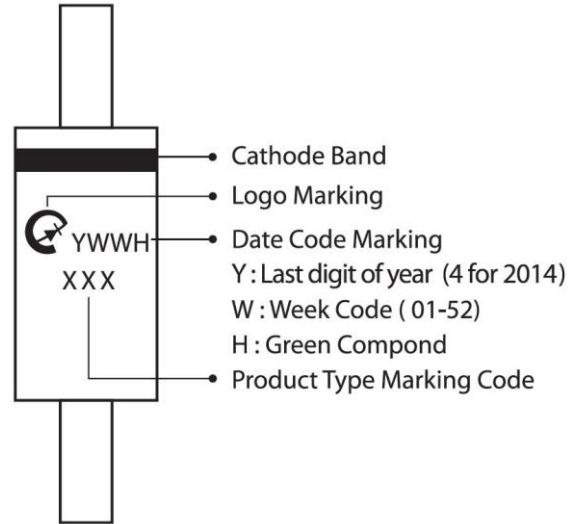

**Ammo Box Packing**

Package	Inner	BOX	Inner Box	Carton	Carton Size	Gross Weight
	Pack	(EA)	(mm)	(EA)	(mm)	(Kg)-Approx.
DO-201AD(DO-27)-52mm	Reel	1,200	255x75x150	12000	440x280x335	16